
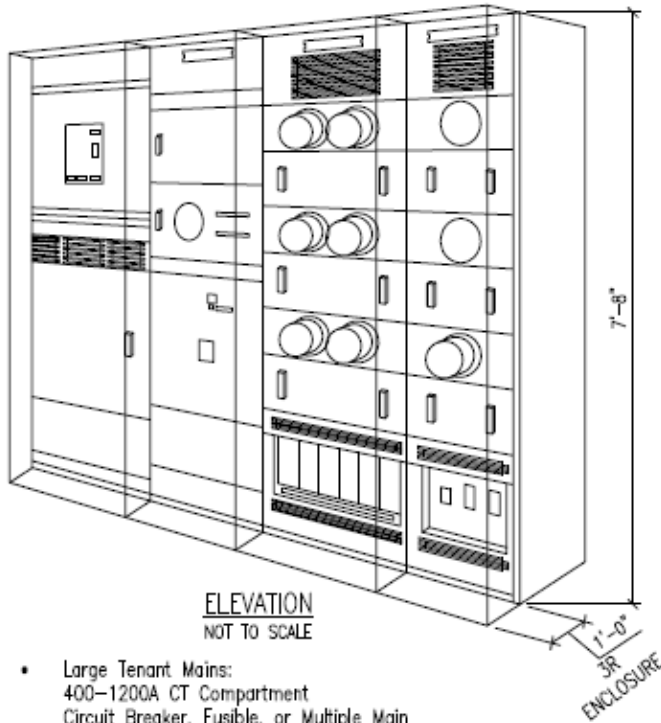


## RESIDENTIAL MULTI-METERING FOR EUSERC APPLICATIONS

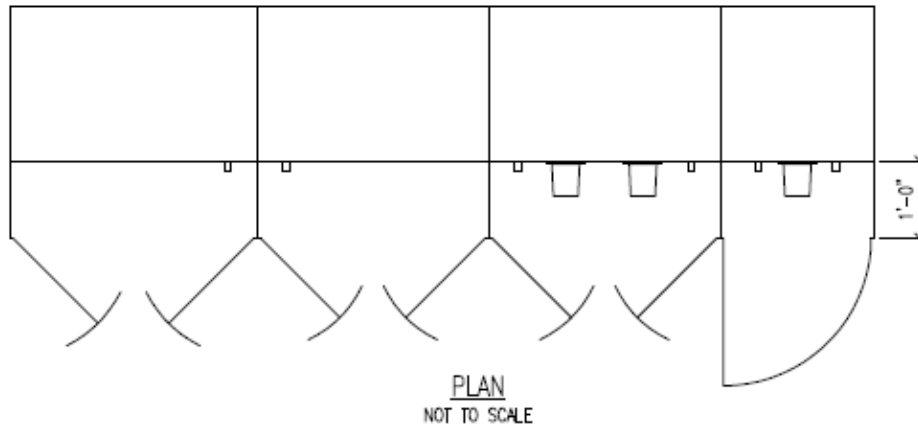

- UL Listed Service Entrance

- Service:  
120/240V 1 $\phi$ 3W ac  
240/120V 3 $\phi$ 4W ac  $\Delta$   
208Y/120 3 $\phi$ 4W ac  
480Y/277V 3 $\phi$ 4W ac

- Ampacity 400–4000A

- SCCR 100,000A rms Symmetrical

- Bussing:  
Aluminum (Standard)  
Copper (Optional)

- Enclosure:  
NEMA Type 3R

- Hot Sequence Metering: EXCEPTION  
6 HANDLE RULE

- Mains:  
Underground Pull Section 400–4000A  
Circuit Breaker 400–4000A  
Fusible Switch 400–4000A

- Large Tenant Mains:  
400–1200A CT Compartment  
Circuit Breaker, Fusible, or Multiple Main

- Meter Sections:  
3–Socket or 6–Socket  
Circuit Breaker or Fusible

- Meter Sockets:  
200A Continuous (5–Jaw or 7–Jaw)  
Plug–On Construction

4 panels–R