



|              |
|--------------|
| Date         |
| Quote #      |
| Project Name |
| Type         |



## SCSS - Wall Recessed

### Description:

SCSS is made of a cast aluminum and consists of a face plate and back box. Silicone sealed lens and fully gasketed connections for weather protection.

|                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Name                 | Engine               | Lumens               | CCT                  | Electrical           | Mounting             | Lens                 | Pattern              | Options              | Finish               |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

| Name | Light Engine  | Source Lumens <sub>(LED)(5000K)</sub> | Color Temp | Electrical   |
|------|---------------|---------------------------------------|------------|--------------|
| SCSS | 24W LED (Max) | 3120                                  | 3000K      | UNV 120-277V |
|      |               |                                       | 3500K      | HLV 347-480V |
|      |               |                                       | 4000K      |              |
|      |               |                                       | 5000K      |              |

| Mounting             |  | Lens                           |  | Light Pattern |  | Options              |  | Finishes                                                             |  |
|----------------------|--|--------------------------------|--|---------------|--|----------------------|--|----------------------------------------------------------------------|--|
| R                    |  | CPL                            |  | FT            |  | TP                   |  | Standard                                                             |  |
| Recessed in dry wall |  | Clear polycarbonate lens (STD) |  | Forward throw |  | Tamperproof hardware |  | BL Black                                                             |  |
| RTC                  |  | OPL                            |  |               |  | TS                   |  | WH White                                                             |  |
| Recessed in concrete |  | Opal polycarbonate lens        |  |               |  | EM                   |  | SG Silver Grey                                                       |  |
|                      |  |                                |  |               |  | SF                   |  | BZ Bronze                                                            |  |
|                      |  |                                |  |               |  |                      |  | Custom                                                               |  |
|                      |  |                                |  |               |  |                      |  | CC Custom Color                                                      |  |
|                      |  |                                |  |               |  |                      |  | See website for custom colors. Contact factory for physical samples. |  |



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





### Dimensions & Mounting:

Please note that drawings are not to scale.

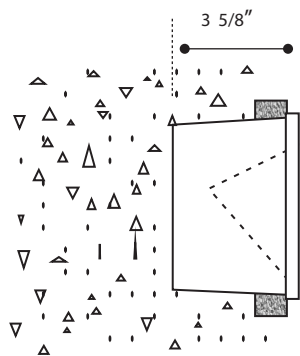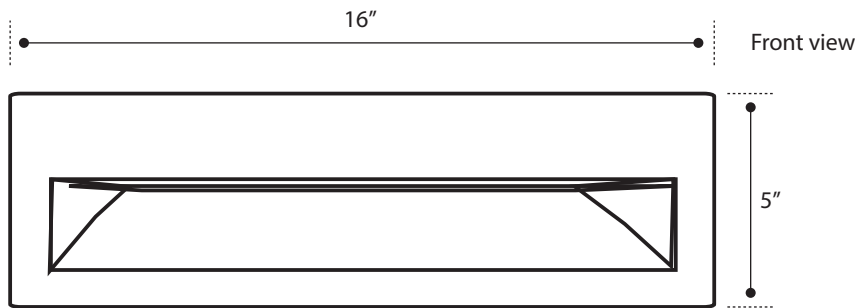

BACK BOX DIMENSIONS: 14 1/8" X 3 1/4" X 3 1/4"

### Listing:

Complies to CSA and UL standards.

### Polar Graph:

