

Final Drainage Report

***Compark Village South Filing No. 2 and Filing 2, Amd 1
Parker, Colorado***

Code: CLCPKC3

Prepared For:

Michael Vickers
470 Compark, LLC
290 Fillmore Street, Suite 1A
Denver, Colorado 80206

Prepared By:



7600 East Orchard Road, Suite 150-N
Greenwood Village, Colorado 80111
Contact: Gary T. Iwata, P.E.
303-708-0500

Submitted: November, 2016
Revised: December, 2016
Revised: July 2020

ENGINEERS CERTIFICATION

This Final Drainage Report for Compark Village South Filing No. 2 and Filing No. 2 – Amendment No. 1 was prepared by me or under my direct supervision in accordance with the provisions of the *Town of Parker Storm Drainage and Environmental Criteria Manual*. I understand that the Town of Parker and its designated town authority do not and will not assume liability for drainage facilities designed by others.

Gary T. Iwata, P.E.
Registered Professional Engineer
State of Colorado No. 37642



TABLE OF CONTENTS

I. Introduction	1
A. Location.....	1
B. Description of Property	1
C. Existing Soils	1
II. Drainage Basins and Sub-Basins.....	2
A. Existing Basin Description.....	2
B. Proposed Basin Development.....	2
C. Sub Basin Descriptions.....	2
III. Drainage Design Criteria	16
A. Hydrology Criteria	16
B. Hydraulic Criteria.....	17
IV. Drainage Facility Design	18
A. General Concept	18
B. Specific Details.....	18
V. Environmental Protection Criteria.....	19
A. Erosion and Sediment Control Measures	19
B. Water Quality	19
VI. Conclusion.....	20
A. Compliance with Standards.....	20
B. Drainage Concept	20
C. Erosion and Sediment Control Concept.....	20

APPENDICES

APPENDIX A

Maps

- Vicinity Map
- FEMA Flood Information Rate Map
- Soils Map

APPENDIX B

Hydrologic Analysis

- UDFCD Table 6-4
- UDFCD Table 6-5
- UDFCD Figures 6-1, 6-2 & 6-3
- Time of Concentration Calculations
- 2-Year Storm Runoff Calculations
- 100-Year Storm Runoff Calculations

APPENDIX C

Hydraulic Analysis

- Inlet Capacity Calculations
- StormCAD Storm Sewer Design
 - 2-Year Storm Table and Profiles
 - 100-Year Storm Table and Profiles

APPENDIX D

Drainage Basin Map

I. Introduction

A. Location

Compark Village South Filing 2 is located within the south half of section 6, township 6 south, range 66 west of the 6th principal meridian, Town of Parker, Douglas County, Colorado. The site is bound by existing residential neighborhoods to the South, future Belford Ave to the North, and future developed parcels to the East and West.

The Compark Village South Filing 2 developed area is approximately 32.9 acres. Upon final build out, the site will contain 120 residential duplex lots and 72 residential single family home lots.

B. Description of Property

The topography for the site generally slopes from South to North. The highest elevation on the site is located at the southwest quadrant of the site and the lowest elevation is located directly north of Belford Avenue.

Existing vegetation on the site is comprised of native grasses, shrubs and weedy species indigenous to the area.

C. Existing Soils

Existing soils for the site were researched on the NRCS web soil survey, see Appendix A. Three principal soil groups exist onsite:

- Newlin Gravelly Sandy Loam (NeE 8 to 30% slopes) This rolling to steep sloping soil is located on uplands and terrace side slopes. Runoff is medium and erosion hazard is slight to moderate. This soil is classified as a Type B Hydrologic Soil Group.
- Fondis Clay Loam (FoD 3 to 9% slopes) This sloping soil is located on uplands. Runoff is high and the erosion hazard is moderate. The soil is classified as a Type C Hydrologic Soil Group.
- Fondis Clay Loam (FoB 1 to 3% slopes) This gently sloping soil is located on tablelands and uplands. Runoff is medium and erosion hazard is slight to moderate. The soil is classified as a Type C Hydrologic Soil Group.

II. Drainage Basins and Sub-Basins

A. Existing Basin Description

The proposed site is tributary to Green Acres Tributary which runs through the property adjacent to the North of the site. The Green Acres Tributary confluent w/ Happy Canyon Creek upstream of Jordan Road and ultimately joins Cherry Creek, further downstream of Jordan Road. There is an existing 10' x 12' box culvert located to the north of the site that conveys flows from an existing depressed area to the north of the site through and under E-470.

The site is located within Zone X as shown on the Federal Emergency Management Agency (FEMA) Flood Insurance Rate Maps (FIRM) numbers 08035C0062F and 08035C0066F, dated September 30, 2005 for Happy Canyon Creek. The FIRM maps can be found in Appendix A. A portion of the Green Acres Tributary is located in the Zone A 100-year Floodplain, also shown on the FIRM maps in Appendix A.

B. Proposed Basin Development

The proposed site will be divided into several drainage sub-basins. These sub-basins have been determined based on land use, area, roadway slopes, storm sewer locations and inlet capacities. The developed site will generally follow the existing drainage patterns and runoff will be conveyed via storm sewer, overland flow, and channel flow through a proposed channel to a proposed detention and water quality basin located directly north of the site. This detention basin will release restricted flows into an existing box culvert under E-470 and into the Green Acres Tributary in compliance with the Master Drainage Report for Compark Village South and Town of Parker requirements. A portion of the site will drain to two direct discharges to the Green Acres Tributary. Each direct discharge will have a diversion structure before the connection to the GAT. The diversion structure will direct the two-year storm to the proposed detention basin for water quality treatment and will allow the less frequent storms to overtop a diversion weir and flow to the GAT. The Preliminary Drainage Exhibit located in Appendix D shows the location and size of each proposed drainage sub-basin.

C. Sub Basin Descriptions

BEL-1

Drainage basin BEL-1 is composed of landscaped area, sidewalk, and the north half of a portion of Belford Avenue. Storm water will flow east toward Design Point B1 where it will be collected by Inlet 2-1. This is an on grade 10' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, storm water will be conveyed to the West Water Quality Pond just southeast of Belford Avenue via storm sewer. This pond discharges directly to Green Acres Tributary. In the 100 year

storm event, excess runoff will bypass Inlet 2-1 and flow into sub basin BEL-3 where it will be intercepted by Inlet 2-2 at Design Point B3.

BEL-2

Drainage basin BEL-2 is composed of landscaped area, sidewalk, and the south half of a portion of Belford Avenue. Storm water will flow east toward Design Point B2 where it will be collected by Inlet 1-1. This is an on grade 10' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, storm water will be conveyed to the West Water Quality Pond just southeast of Belford Avenue via storm sewer. This pond discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 1-1 and flow into sub basin BEL-4 where it will be intercepted by Inlet 1-2 at Design Point B4.

BEL-3

Drainage basin BEL-3 is composed of landscaped area, sidewalk, and the north half of a portion of Belford Avenue. Storm water will flow toward a low point in the middle of the basin at Design Point B3 where it will be collected by Inlet 2-2. This is a 15' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event for basin BEL-3 as well as the bypass runoff from basin BEL-1. From there, storm water will be conveyed to the East Water Quality Pond just east of Belford Avenue via storm sewer. This pond discharges directly to Green Acres Tributary.

BEL-4

Drainage basin BEL-4 is composed of landscaped area, sidewalk, and the south half of a portion of Belford Avenue. Storm water will flow toward a low point in the middle of the basin at Design Point B4 where it will be collected by Inlet 1-2. This is a 10' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event for basin BEL-4 as well as the bypass runoff from basin BEL-2. From there, storm water will be conveyed to the East Water Quality Pond just east of Belford Avenue via storm sewer. This pond discharges directly to Green Acres Tributary.

BEL-5

Drainage basin BEL-5 is composed of landscaped area, sidewalk, and the north half of a portion of Belford Avenue. It also includes half of the bridge over Happy Canyon Creek. Storm water will generally flow southeast toward Design Point B5 at South Chambers Road. A storm sewer network has not yet been designed to accommodate this basin. This will be completed in another phase.

BEL-6

Drainage basin BEL-6 is composed of landscaped area, sidewalk, and the south half of a portion of Belford Avenue. It also includes half of the bridge over Happy Canyon

Creek. Storm water will generally flow southeast toward Design Point B6 at South Chambers Road. A storm sewer network has not yet been designed to accommodate this basin. This will be completed in another phase.

CVS-1

Drainage basin CVS-1 is composed of landscaped area, sidewalk, and the north half of a portion of Belford Avenue. Storm water will flow northeast toward Design Point 1 where it will be intercepted by Inlet 1-3. This is an on grade 15' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, storm water will be conveyed directly to Green Acres Tributary via storm sewer. A water quality structure will be installed just before the outfall into Green Acres Tributary as part of the Compark Village South Filing No. 1 project. In the 100 year storm event, excess runoff will bypass Inlet 1-3 and flow into sub basin CVS-3 where it will be intercepted by Inlet 1-4 at Design Point 3.

CVS-2

Drainage basin CVS-2 is composed of landscaped area, sidewalk, and the south half of a portion of Belford Avenue. Storm water will flow northeast toward Design Point 2 where it will be intercepted by Inlet 2-3. This is an on grade 15' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, storm water will be conveyed directly to Green Acres Tributary via storm sewer. In the 100 year storm event, excess runoff will bypass Inlet 2-3 and flow into sub basin CVS-4 where it will be intercepted by Inlet 2-4 at Design Point 4.

CVS-3

Drainage basin CVS-3 is composed of landscaped area, sidewalk, and the north half of a portion of Belford Avenue. Storm water will flow northeast toward Design Point 3 where it will be collected by Inlet 1-4. This is an on grade 10' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, storm water will be conveyed directly to Green Acres Tributary via storm sewer. A diversion structure will be installed just before the outfall into Green Acres Tributary as part of the Compark Village South Filing No. 1 project. The diversion structure is designed to direct the runoff from a two year storm event to the proposed full spectrum detention basin to be installed as part of the Compark Village South Filing No. 1 project. In less frequent storm events, the runoff will overtop the diversion weir and discharge directly to the Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 2-3 and flow into sub basin CVS-7 where it will be intercepted by Inlet 1-6 at Design Point 7.

CVS-4

Drainage basin CVS-4 is composed of landscaped area, sidewalk, and the south half of a portion of Belford Avenue. Storm water will flow northeast toward Design Point 4

where it will be collected by Inlet 2-4. This is an on grade 15' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, storm water will be conveyed directly to Green Acres Tributary via storm sewer. A diversion structure will be installed before the outfall into Green Acres Tributary as part of the Compark Village South Filing No. 1 project. The diversion structure is designed to direct the runoff from a two year storm event to the proposed full spectrum detention basin to be installed as part of the Compark Village South Filing No. 1 project. In less frequent storm events, the runoff will overtop the diversion weir and discharge directly to the Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 2-4 and flow into sub basin CVS-8 where it will be intercepted by Inlet 2-6 at Design Point 8.

CVS-4A

Drainage basin CVS-4 is composed of landscaped area, sidewalk, residential homes, and residential local streets. Storm water will flow northeast toward Design Point 4A where it will be collected by Inlet 3-4. This is a 10' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event for basin CVS-4A as well as the bypass runoff from basin CVS-5. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer.

CVS-5

Drainage basin CVS-5 is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow northeast toward Design Point 5 where it will be collected by Inlet 5-4. This is an on grade 15' Type R inlet with the capacity to handle the runoff from a 2 year storm event. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer. In the 100 year storm event, excess runoff will bypass Inlet 5-4 and flow into sub basin CVS-4A where it will be intercepted by Inlet 3-4 at Design Point 4A.

CVS-6

Drainage basin CVS-6 is composed of landscaped area, a berm, sidewalk, and residential local streets. Storm water will flow north toward Design Point 6 where it will be collected by Inlet 6-4. This is an on grade 10' Type R inlet with the capacity to handle the runoff from a 100 year storm event. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer.

CVS-7

Drainage basin CVS-7 is composed of landscaped area, sidewalk, and the north half of a portion of Belford Avenue. Storm water will flow east toward Design Point 7

where it will be collected by Inlet 1-6. This is an on grade 10' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, storm water will be conveyed directly to Green Acres Tributary via storm sewer. A diversion structure will be installed just before the outfall into Green Acres Tributary as part of the Compark Village South Filing No. 1 project. The diversion structure is designed to direct the runoff from a two year storm event to the proposed full spectrum detention basin to be installed as part of the Compark Village South Filing No. 1 project. In less frequent storm events, the runoff will overtop the diversion weir and discharge directly to the Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 5-4 and flow into sub basin CVS-11 where it will be intercepted by Inlet 1-5 at Design Point 11.

CVS-8

Drainage basin CVS-8 is composed of landscaped area, sidewalk, and the south half of a portion of Belford Avenue. Storm water will flow east toward Design Point 8 where it will be intercepted by Inlet 2-6. This is an on grade 15' Type R inlet with the capacity to handle the runoff from a 5 year storm event. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer. In the 100 year storm event, excess runoff will bypass Inlet 2-6 and flow into sub basin CVS-12 where it will be intercepted by Inlet 2-5 at Design Point 12.

CVS-9

Drainage basin CVS-9 is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow northeast toward Design Point 9 where it will be collected by Inlet 4-5A. This is an on grade 15' Type R inlet with the capacity to handle the runoff from a 2 year storm event. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer. In the 100 year storm event, excess runoff will bypass Inlet 4-5A and flow into sub basin CVS-12 where it will be intercepted by Inlet 2-5 at Design Point 12.

CVS-9A

Drainage basin CVS-9A is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will generally flow northwest toward Design Point 9A where it will be collected by Inlet 4-4. This is a 5' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer.

CVS-10

Drainage basin CVS-10 is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow northeast toward Design Point 10 where it will be collected by Inlet 5-5A. This is an on grade 15' Type R inlet with the capacity to handle the runoff from a 2 year storm event. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer. In the 100 year storm event, excess runoff will bypass Inlet 5-5A and flow into sub basin CVS-13B where it will be intercepted by Inlet 4-5B at Design Point 13B.

CVS-10A

Drainage basin CVS-10A is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will generally flow northwest toward Design Point 10A where it will be collected by Inlet 5-4A. This is a 5' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, it will be conveyed via storm sewer to the diversion structure described above and then either to the detention basin or directly to Green Acres Tributary via storm sewer. In the 100 year storm event, excess runoff will bypass Inlet 5-4A and flow into sub basin CVS-10 where it will be intercepted by Inlet 5-5A at Design Point 10.

CVS-11

Drainage basin CVS-11 is composed of landscaped area, sidewalk, and the north half of a portion of Belford Avenue. Storm water will flow toward a low point in the middle of the basin at Design Point 11 where it will be collected by Inlet 1-5. This is a 10' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event for basin CVS-11 as well as the bypass runoff from basin CVS-7. From there, storm water will be conveyed to the regional detention pond at E-470 via storm sewer. This pond discharges directly to Green Acres Tributary.

CVS-12

Drainage basin CVS-12 is composed of landscaped area, sidewalk, residential homes, residential local streets, and the south half of a portion of Belford Avenue. Storm water will flow toward a low point in the middle of the north side of the basin at Design Point 12 where it will be collected by Inlet 2-5. This is a 15' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event for basin CVS-12 as well as the bypass runoff from basins CVS-8 and CVS-9. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary.

CVS-12A

Drainage basin CVS-12A is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow south and east toward Design Point 12A where it will be collected by Inlet 3-5. This is a 15' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary.

CVS-12B

Drainage basin CVS-12B is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will generally flow south and west toward Design Point 12A where it will be collected by Inlet 3-5. This is a 15' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary.

CVS-13

Drainage basin CVS-13 is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow northeast toward Design Point 13 where it will be collected by Inlet 4-5. This is a 10' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event as well as the bypass runoff from basin CVS-13C. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary.

CVS-13A

Drainage basin CVS-13A is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow east and north toward Design Point 13A where it will be collected by Inlet 6-5A. This is a 10' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 6-5A and flow into sub basin CVS-13 where it will be intercepted by Inlet 4-5 at Design Point 13.

CVS-13B

Drainage basin CVS-13B is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow east and north toward Design Point 13B where it will be collected by Inlet 4-5B. This is a 10' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via

storm sewer. This basin discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 4-5B and flow into sub basin CVS-13C where it will be intercepted by Inlet 4-5C at Design Point 13C.

CVS-13C

Drainage basin CVS-13C is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow north and east toward Design Point 13C where it will be collected by Inlet 4-5C. This is a 5' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, storm water will be conveyed to the regional detention pond at E-470 via storm sewer. This pond discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 4-5C and flow into sub basin CVS-13 where it will be intercepted by Inlet 4-5 Design Point 13.

CVS-14

Drainage basin CVS-14 is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow north and east toward Design Point 14 where it will be collected by Inlet 6-5. This is a 15' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event including runoff from basin CVS-14B and bypass runoff from basin CVS-14C. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary.

CVS-14A

Drainage basin CVS-14A is composed of landscaped area and berms. Runoff will flow toward a swale along the north side of the basin. The swale will send the storm water east toward Design Point 14A where it will be collected by Inlet 7-5. This is a CDOT Type C inlet with the capacity to handle the runoff from a 100 year storm event. From there, storm water will be conveyed to the regional detention pond at E-470 via storm sewer. This pond discharges directly to Green Acres Tributary.

CVS-14B

Drainage basin CVS-14 is composed of landscaped area, future sidewalk, some future residential homes and future residential local streets. Storm water will north and east flow toward Design Point 14 where it will be collected by Inlet 6-5. This is a 15' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event including runoff from basin CVS-14. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary.

CVS-14C

Drainage basin CVS-14C is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow north and east toward Design Point 14C where it will be collected by Inlet 5-5B. This is a 10' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 5-5B and flow into sub basin CVS-14 where it will be intercepted by Inlet 6-5 at Design Point 14.

CVS-15

Drainage basin CVS-15 is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow north and west toward Design Point 15 where it will be collected by Inlet 5-5. This is a 10' Type R inlet in sump with the capacity to handle the runoff from a 100 year storm event as well as bypass runoff from Basin CVS-15A. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary.

CVS-15A

Drainage basin CVS-15A is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow west and north toward Design Point 15A where it will be collected by Inlet 6-5B. This is a 10' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer. This basin discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 6-5B and flow into sub basin CVS-15 where it will be intercepted by Inlet 5-5 at Design Point 15.

CVS-16

Drainage basin CVS-16 is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow southeast toward Design Point 16 where it will be collected by Inlet 2-11A. This is a 10' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer and a temporary drainage swale. This detention basin discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 2-11A and flow east across Wolf Fox Street via a concrete pan to Inlet 2-10A at Design Point 22.

CVS-17

Drainage basin CVS-17 is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow northeast toward Design Point 17 where it will be collected by Inlet 2-11. This is a 10' Type R inlet on grade with the capacity to handle the runoff from a 2 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer and a temporary drainage swale. This detention basin discharges directly to Green Acres Tributary. In the 100 year storm event, excess runoff will bypass Inlet 2-11 and flow east across Wolf Fox Street via a concrete pan to Inlet 2-10 at Design Point 23.

CVS-17-A

Drainage basin CVS-17A is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow northeast toward Design Point 17A. A storm sewer network has not yet been designed to accommodate this basin. This will be completed as part of a later phase.

CVS-18

Drainage basin CVS-18 is to be developed in a later phase and will be composed of landscaped area, sidewalk, and residential local streets. Storm water will flow northeast toward Design Point 18. A storm sewer network has not yet been designed to accommodate this basin. This will be completed as part of a later phase.

CVS-19

Drainage basin CVS-19 is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes, residential local streets, and the south half of a portion of Belford Avenue. Storm water will flow northeast toward Design Point 19. A storm sewer network has not yet been designed to accommodate this basin. This will be completed as part of a later phase.

CVS-20

Drainage basin CVS-20 is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes, and residential local streets. Storm water will flow southwest and then northwest toward Design Point 20. A storm sewer network has not yet been designed to accommodate this basin. This will be completed as part of a later phase.

CVS-21

Drainage basin CVS-21 is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes, and residential local streets. Storm

water will flow north east toward Design Point 21. A storm sewer network has not yet been designed to accommodate this basin. This will be completed as part of a later phase.

CVS-22

Drainage basin CVS-22 is composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow southeast toward Design Point 22 where it will be collected by Inlet 2-10A. This is a 10' Type R inlet on grade with the capacity to handle the runoff from a 100 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer and a temporary drainage swale. This detention basin discharges directly to Green Acres Tributary.

CVS-23

Drainage basin CVS-23 is to be developed in a later phase and will be composed of landscaped area, sidewalk, residential homes and residential local streets. Storm water will flow northeast toward Design Point 23 where it will be collected by Inlet 2-10. This is a 15' Type R inlet on grade with the capacity to handle the runoff from a 100 year storm event. From there, storm water will be conveyed to the CVS Filing No. 1 detention basin at E-470 via storm sewer and a temporary drainage swale. This detention basin discharges directly to Green Acres Tributary.

III. Drainage Design Criteria

A. Hydrology Criteria

The Town of Parker *Storm Drainage and Environmental Criteria Manual* and the Urban Drainage and Flood Control District (UDFCD) *Urban Storm Drainage Criteria Manual* were used for the storm drainage system design.

The following criteria was utilized in developing the proposed drainage system:

- The proposed drainage system is designed to match, as best as possible, the historic drainage patterns occurring at the site.
- The proposed drainage system attempts to limit the diversion of storm runoff from one basin to another (basin transfer).
- Runoff generated from drainage sub-basins is conveyed via the proposed storm sewer system, overland flow or via the Green Acres Tributary into the proposed regional detention and water quality pond.

Design Rainfall: UDFCD rainfall data is used to determine peak runoff values. The 2-year and 100-year frequency storms are used as the minor and major design storms respectively.

Runoff Calculation: Peak storm runoff is determined using the rational formula,

$$Q = CIA \text{ (CFS)}$$

C = Runoff coefficient based on surface impermeability

I = Rainfall intensity in inches per hour

A = Drainage basin area in acres

UDFCD Imperviousness Values (Table 6-3) and Runoff Coefficients (Table 6-5) were used to develop basin runoff coefficients. These tables can be found in Appendix B. The runoff coefficients are weighted for each applicable sub-basin to more accurately reflect the runoff characteristics of the site.

Time of Concentration is determined using the criteria in Sections 3.4.1 and 3.4.2 of the UDFCD Criteria Manual. These calculations are included in Appendix B.

Rainfall intensities are determined using the Town of Parker's *Storm Drainage and Environmental Criteria Manual* Point Rainfall data and Intensity-Duration curves.

The recurrence intervals used for this study were based on a residential land use. The minor drainage system is designed for a 2-year recurrence interval and the major drainage system is designed for a 100-year recurrence interval.

B. Hydraulic Criteria

The following criteria were utilized in determining allowable street flow.

Minor Storm (2-yr)

- Local Street – No curb overtopping and flow may spread to crown of street.

Minor Storm (5-yr)

- Collector Street – No curb overtopping. Flow Spread must leave at least a 10 foot width free of water. (5-feet on each side of crown for roads without median. 10-feet on each side of median for roads with a median.)

Major Storm (100-yr)

- Local and Collector Streets – The depth of water at the gutter flowline shall not exceed 12 inches. A minimum of 18-inches must be provided from the water surface elevation to the lowest floor elevation or window well opening elevation

for structures that are adjacent to the roadway (this includes residential dwellings, public, commercial and industrial buildings).

For the major and minor storm events, allowable capacity was determined using Street and Inlet Hydraulics version 3.14 by UDFCD.

IV. Drainage Facility Design

A. General Concept

Stormwater runoff from the proposed subdivision will generally follow existing drainage patterns from southwest to northeast on the site. Overland flow and a proposed storm sewer system will route the runoff to the Green Acres Tributary or directly to the proposed full spectrum detention basin located adjacent to the Green Acres Tributary at E-470. This detention basin will release restricted flows directly into the Green Acres Tributary which will then flow through the existing 10' x 12' box culvert under E-470.

B. Specific Details

As mentioned previously in this report, the site will be divided into several drainage sub-basins. The onsite runoff will be routed through the site via the proposed roadways and gutters where it will be intercepted by a number of on-grade inlets and inlets located in roadway sumps. This runoff will be routed, via storm sewer, to either the Green Acres Tributary or directly to the proposed full spectrum detention basin. Existing diversion structures from the Compark Village South, Filing 1 project will direct runoff from the 2-year storm event to the detention basin for treatment before entering the Green Acres Tributary. Flows greater than the 2-year storm will discharge directly to the Green Acres Tributary.

In addition to the onsite sub-basins, the runoff from some offsite areas will be routed through the proposed site. These offsite areas are two basins (H170 & H180) directly south of the site that include part of the Grand View Estates development. In each basin, flows are intercepted via proposed flared end sections and carried through the site via proposed storm sewer into either the Green Acres Tributary or directly into the Compark Village South Filing No. 1 detention basin at E-470.

The Compark Village South Filing No. 1 detention basin was designed based on a study of major basins that all discharge to the Green Acres Tributary. As has been stated, smaller sub basins were created for this report to more accurately design the storm sewer network that serves the Compark Village South Filing 2 and Filing 2, Amendment 1 residential development. To verify coordination between these two sets of data, a table has been provided below.

Basin ID	Impervious % used in GAT Hydrology Study	Composite Impervious % of Corresponding Sub Basins
H161	50%	41%
H171	50%	44%
H181	50%	38%

The corresponding composite impervious percentages from the sub basin analysis are all below the percentages used to design the CVSF 1 detention basin. Therefore, the detention basin has been sufficiently designed to exceed the storage requirements for the Compark Village South Filing 2 and Filing 2, Amd 1 residential sites.

More details for the proposed detention and water quality basin are included in the Conceptual Drainage Report for Compark South prepared by Manhard Consulting, Ltd.^[5] and approved by the Town of Parker.

V. Environmental Protection Criteria

A. Erosion and Sediment Control Measures

During construction, silt fence, inlet protection, and vehicle tracking pads will be used to prevent sediment from entering the storm sewer system or sediment leaving the site. Temporary sediment basins will also be used during construction to trap sediment from stormwater before it leaves the site. All erosion and sediment control measures will be maintained, inspected, and repaired by the Contractor throughout construction in compliance with Town of Parker requirements. The proposed Construction Best Management Practices (CBMPs) for this development will follow the requirements for the Town of Parker and UDFCD.

B. Water Quality

Water quality control for this development will be constructed as part of the Compark Village South Filing 1 project. This will consist of diversion structures on the storm mains that drain to the Green Acres Tributary. The diversion structures will direct runoff from the 2-year storm event to the detention basin for treatment before entering the Green Acres Tributary. Flows greater than the 2-year storm will discharge directly to the Green Acres Tributary.

VI. Conclusion

A. Compliance with Standards

The drainage system for Compark Village South Filing No. 2 and Filing No. 2, Amendment 1 was designed to meet the Town of Parker's *Storm Drainage and Environmental Criteria Manual* and the Urban Drainage and Flood Control District's *Urban Storm Drainage Criteria Manual*. The existing Flood Insurance Rate Map (FIRM) in Appendix A shows no portion of the developed site area to be within a flood hazard area. Therefore, no map revisions through FEMA are required as part of this development.

B. Drainage Concept

The drainage system was designed to allow storm water to be safely conveyed through and away from the site without negatively impacting downstream properties. The drainage concepts proposed for this site are in accordance with the Conceptual Drainage Report for Compark South prepared by Manhard Consulting, Ltd. and approved by the Town of Parker.

All storm sewer facilities are intended to be included within the Town of Parker's public improvements maintenance program. The Compark South Drainage Channel Tract will be owned and maintained by the Belford South Metropolitan District. The Town of Parker will retain oversight maintenance rights as needed during emergency conditions.

C. Erosion and Sediment Control Concept

The Construction Best Management Practices (CBMPs) proposed for this site follow the requirements of the Town of Parker and the recommendations by UDFCD. Attention to proper installation and maintenance are essential for the sediment and erosion control practices to function properly.


VII. References

1. Town of Parker's *Storm Drainage and Environmental Criteria Manual*, February 2014.
2. Urban Drainage and Flood Control District's *Urban Storm Drainage Criteria Manual* Vol. 1–2, dated April, 2008.
3. Urban Drainage and Flood Control District's *Urban Storm Drainage Criteria Manual* Vol. 3, dated November, 2010.
4. StormCAD, V8i (SELECT series 2), Bentley Systems, Inc., c. 2011 Bentley Systems, Inc.
5. Conceptual Drainage Report for Compark South, prepared by Manhard Consulting, Ltd., dated November 20, 2015.
6. Happy Canyon Creek Major Drainageway Plan, prepared by Muller Engineering Company, Inc., dated March 2014
7. Final Drainage Report for Compark Village South, Filing No. 1, prepared by Manhard Consulting Ltd., dated December 20, 2016

APPENDIX A


Maps

- Vicinity Map
- FEMA Flood Information Rate Map
- Soils Map

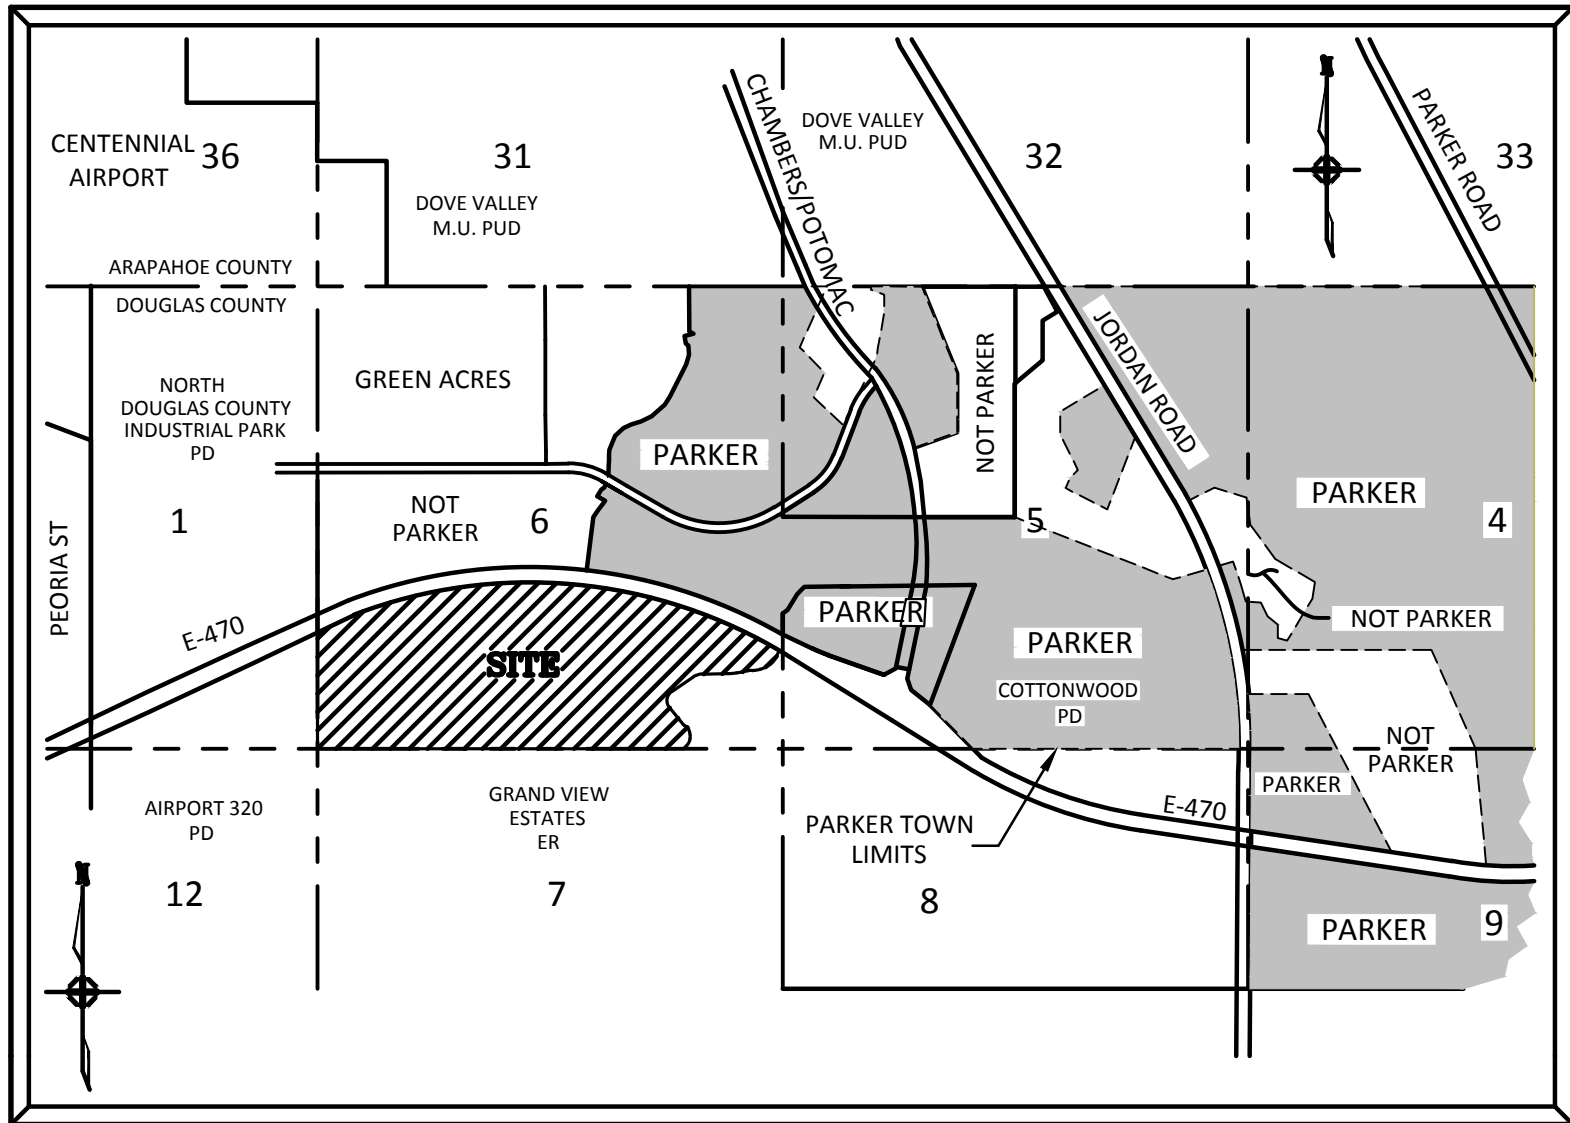

VICINITY MAP

N.T.S.

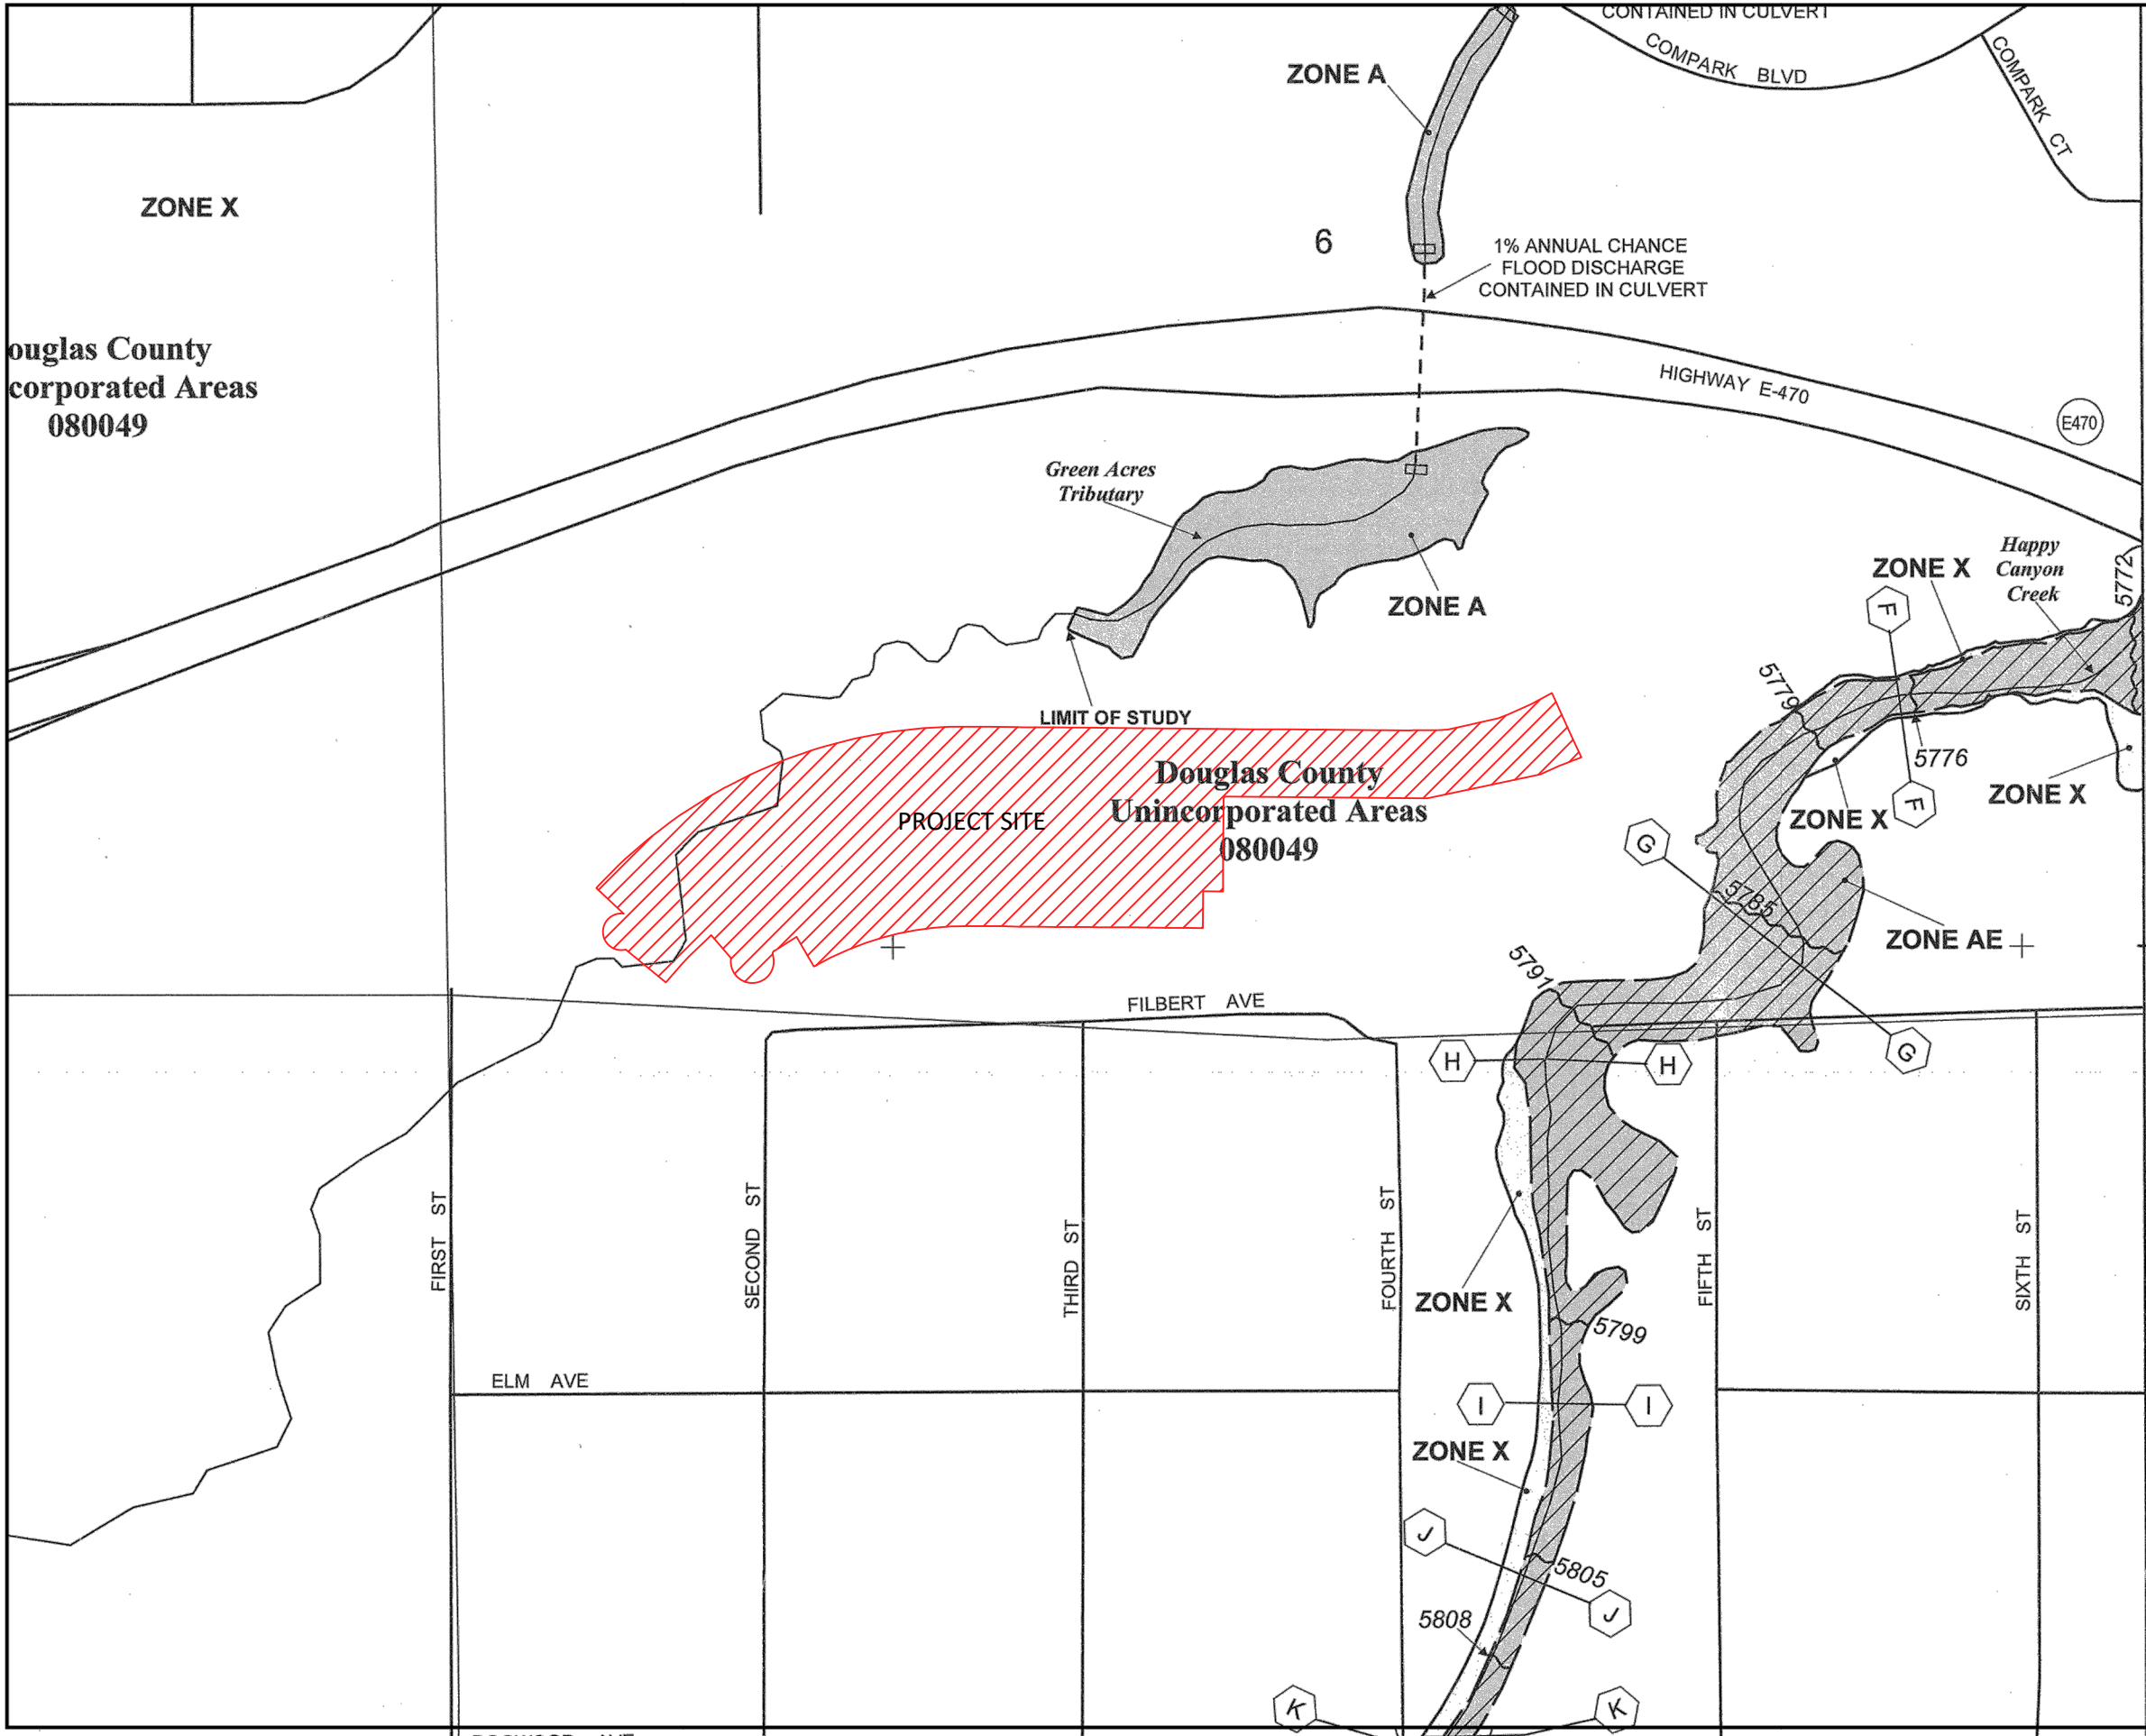

MAP SCALE 1" = 500'

500

1000

FEET

PANEL 0062F

FIRM

FLOOD INSURANCE RATE MAP

**DOUGLAS COUNTY,
COLORADO
AND INCORPORATED AREAS**

PANEL 62 OF 495

(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS

<u>COMMUNITY</u>	<u>NUMBER</u>	<u>PANEL</u>	<u>SUFFIX</u>
DOUGLAS COUNTY	080049	0062	F
LONE TREE, CITY OF	080319	0062	F

Notice to User: The **Map Number** shown below should be used when placing map orders; the **Community Number** shown above should be used on insurance applications for the subject community.



**MAP NUMBER
08035C0062F**


**EFFECTIVE DATE:
SEPTEMBER 30, 2005**

Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov

11:25 D:\a\Name: P:\C\clcpk3\ComSouth05-Residential Preliminary Plot\Documents\Engineering\StormWater Reports\Preliminary Report\Soil Map Exhibit.dwg Updated By: rkatz

Soil Map—Castle Rock Area, Colorado

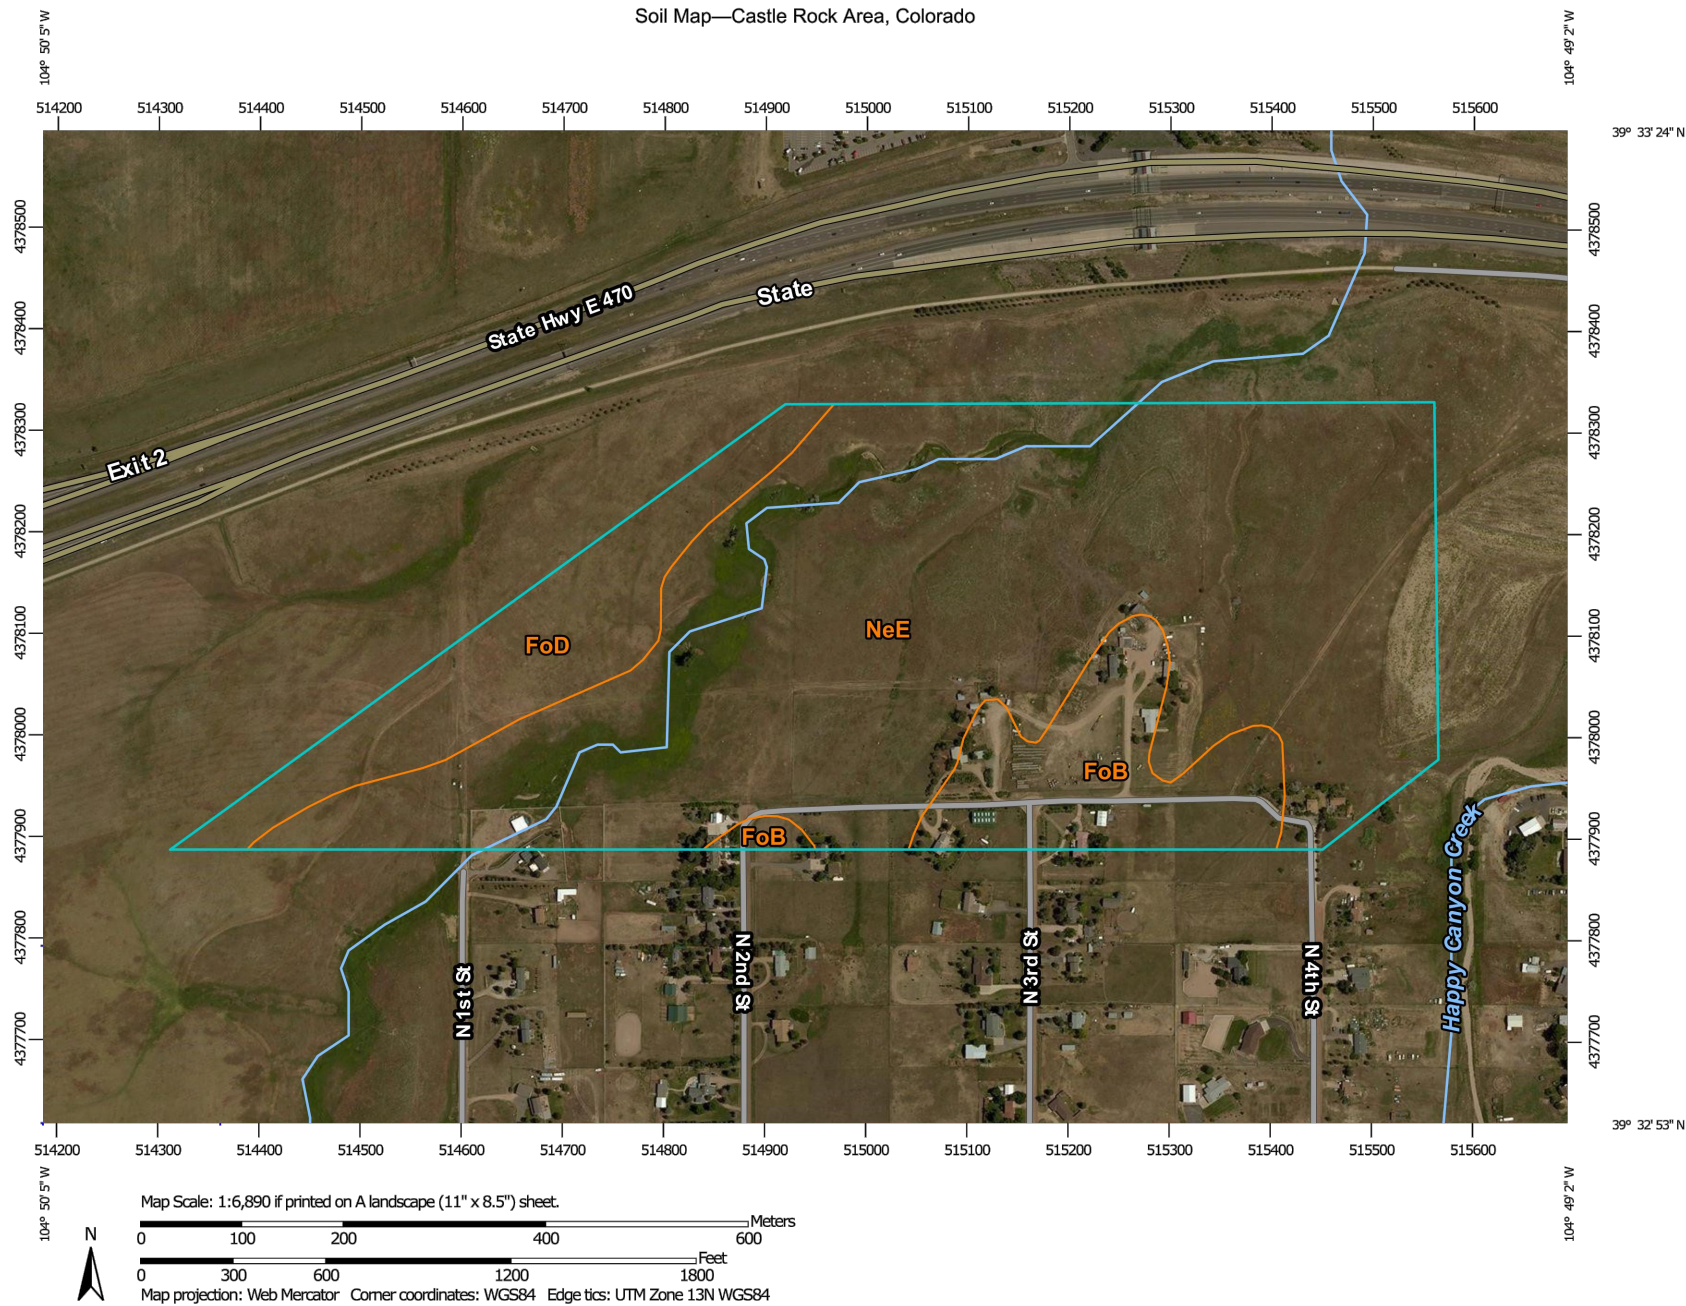

Natural Resources
Conservation Service

Web Soil Survey
National Cooperative Soil Survey

1/14/2016
Page 1 of 3



COMPARK VILLAGE SOUTH FILING NO. 1
TOWN OF PARKER, CO
SOIL MAP EXHIBIT

RJM

RAK

1/14/16

1:6, 890

SHEET

1

CLCPKC3

APPENDIX B

Hydrologic Analysis

- UDFCD Table 6-3
- UDFCD Table 6-4
- UDFCD Table 6-5
- UDFCD Figures 6-1, 6-2 & 6-3
- Impervious Percentage Calculations
- Time of Concentration Calculations
- 2-Year Storm Runoff Calculations
- 5-Year Storm Runoff Calculations
- 100-Year Storm Runoff Calculations

Table 6-3. Recommended percentage imperviousness values

Land Use or Surface Characteristics	Percentage Imperviousness (%)
Business:	
Downtown Areas	95
Suburban Areas	75
Residential:	
Single-family	
2.5 acres or larger	12
0.75 – 2.5 acres	20
0.25 – 0.75 acres	30
0.25 acres or less	45
Apartments	75
Industrial:	
Light areas	80
Heavy areas	90
Parks, cemeteries	10
Playgrounds	25
Schools	55
Railroad yard areas	50
Undeveloped Areas:	
Historic flow analysis	2
Greenbelts, agricultural	2
Off-site flow analysis (when land use not defined)	45
Streets:	
Paved	100
Gravel (packed)	40
Drive and walks	90
Roofs	90
Lawns, sandy soil	2
Lawns, clayey soil	2

Table 6-4. Runoff coefficient equations based on NRCS soil group and storm return period

NRCS Soil Group	Storm Return Period					
	2-Year	5-Year	10-Year	25-Year	50-Year	100-Year
A	$C_A = 0.89i$	$C_A = 0.93i$	$C_A = 0.94i$	$C_A = 0.944i$	$C_A = 0.95i$	$C_A = 0.81i + 0.154$
B	$C_B = 0.89i$	$C_B = 0.93i$	$C_B = 0.81i + 0.125$	$C_B = 0.70i + 0.23$	$C_B = 0.59i + 0.364$	$C_B = 0.49i + 0.454$
C/D	$C_{C/D} = 0.89i$	$C_{C/D} = 0.87i + 0.052$	$C_{C/D} = 0.74i + 0.2$	$C_{C/D} = 0.64i + 0.31$	$C_{C/D} = 0.54i + 0.418$	$C_{C/D} = 0.45i + 0.508$

Where:

i = % imperviousness (expressed as a decimal)

C_A = Runoff coefficient for Natural Resources Conservation Service (NRCS) HSG A soils

C_B = Runoff coefficient for NRCS HSG B soils

$C_{C/D}$ = Runoff coefficient for NRCS HSG C and D soils.

The values for various catchment imperviousness and storm return periods are presented graphically in Figures 6-1 through 6-3, and are tabulated in Table 6-5. These coefficients were developed for the Denver region to work in conjunction with the time of concentration recommendations in Section 2.4. Use of these coefficients and this procedure outside of the semi-arid climate found in the Denver region may not be valid. The UD-Rational Excel workbook performs all the needed calculations to find the runoff coefficient given the soil type and imperviousness and the reader may want to take advantage of this macro-enabled Excel workbook that is available for download from the UDFCD's website www.udfcd.org.

See Examples 7.1 and 7.2 that illustrate the Rational Method.

Table 6-5. Runoff coefficients, *c*

Total or Effective % Imperviousness	NRCS Hydrologic Soil Group A					
	2-yr	5-yr	10-yr	25-yr	50-yr	100-yr
2%	0.02	0.02	0.02	0.02	0.02	0.17
5%	0.04	0.05	0.05	0.05	0.05	0.19
10%	0.09	0.09	0.09	0.09	0.1	0.23
15%	0.13	0.14	0.14	0.14	0.14	0.28
20%	0.18	0.19	0.19	0.19	0.19	0.32
25%	0.22	0.23	0.24	0.24	0.24	0.36
30%	0.27	0.28	0.28	0.28	0.29	0.4
35%	0.31	0.33	0.33	0.33	0.33	0.44
40%	0.36	0.37	0.38	0.38	0.38	0.48
45%	0.4	0.42	0.42	0.42	0.43	0.52
50%	0.45	0.47	0.47	0.47	0.48	0.56
55%	0.49	0.51	0.52	0.52	0.52	0.6
60%	0.53	0.56	0.56	0.57	0.57	0.64
65%	0.58	0.6	0.61	0.61	0.62	0.68
70%	0.62	0.65	0.66	0.66	0.67	0.72
75%	0.67	0.7	0.71	0.71	0.71	0.76
80%	0.71	0.74	0.75	0.76	0.76	0.8
85%	0.76	0.79	0.8	0.8	0.81	0.84
90%	0.8	0.84	0.85	0.85	0.86	0.88
95%	0.85	0.88	0.89	0.9	0.9	0.92
100%	0.89	0.93	0.94	0.94	0.95	0.96
Total or Effective % Imperviousness	NRCS Hydrologic Soil Group B					
	2-yr	5-yr	10-yr	25-yr	50-yr	100-yr
2%	0.02	0.02	0.14	0.24	0.38	0.46
5%	0.04	0.05	0.17	0.27	0.39	0.48
10%	0.09	0.09	0.21	0.3	0.42	0.5
15%	0.13	0.14	0.25	0.34	0.45	0.53
20%	0.18	0.19	0.29	0.37	0.48	0.55
25%	0.22	0.23	0.33	0.41	0.51	0.58
30%	0.27	0.28	0.37	0.44	0.54	0.6
35%	0.31	0.33	0.41	0.48	0.57	0.63
40%	0.36	0.37	0.45	0.51	0.6	0.65
45%	0.4	0.42	0.49	0.55	0.63	0.67
50%	0.45	0.47	0.53	0.58	0.66	0.7
55%	0.49	0.51	0.57	0.62	0.69	0.72
60%	0.53	0.56	0.61	0.65	0.72	0.75
65%	0.58	0.6	0.65	0.69	0.75	0.77
70%	0.62	0.65	0.69	0.72	0.78	0.8
75%	0.67	0.7	0.73	0.76	0.81	0.82
80%	0.71	0.74	0.77	0.79	0.84	0.85
85%	0.76	0.79	0.81	0.83	0.87	0.87
90%	0.8	0.84	0.85	0.86	0.89	0.9
95%	0.85	0.88	0.89	0.9	0.92	0.92
100%	0.89	0.93	0.94	0.94	0.95	0.94

Table 6-5. Runoff coefficients, c (continued)

Total or Effective % Imperviousness	NRCS Hydrologic Soil Groups C and D					
	2-yr	5-yr	10-yr	25-yr	50-yr	100-yr
2%	0.02	0.07	0.22	0.32	0.43	0.52
5%	0.04	0.1	0.24	0.34	0.45	0.53
10%	0.09	0.14	0.27	0.37	0.47	0.55
15%	0.13	0.18	0.31	0.41	0.5	0.58
20%	0.18	0.23	0.35	0.44	0.53	0.6
25%	0.22	0.27	0.39	0.47	0.55	0.62
30%	0.27	0.31	0.42	0.5	0.58	0.64
35%	0.31	0.36	0.46	0.53	0.61	0.67
40%	0.36	0.4	0.5	0.57	0.63	0.69
45%	0.4	0.44	0.53	0.6	0.66	0.71
50%	0.45	0.49	0.57	0.63	0.69	0.73
55%	0.49	0.53	0.61	0.66	0.72	0.76
60%	0.53	0.57	0.64	0.69	0.74	0.78
65%	0.58	0.62	0.68	0.73	0.77	0.8
70%	0.62	0.66	0.72	0.76	0.8	0.82
75%	0.67	0.7	0.76	0.79	0.82	0.85
80%	0.71	0.75	0.79	0.82	0.85	0.87
85%	0.76	0.79	0.83	0.85	0.88	0.89
90%	0.8	0.83	0.87	0.89	0.9	0.91
95%	0.85	0.88	0.9	0.92	0.93	0.94
100%	0.89	0.92	0.94	0.95	0.96	0.96

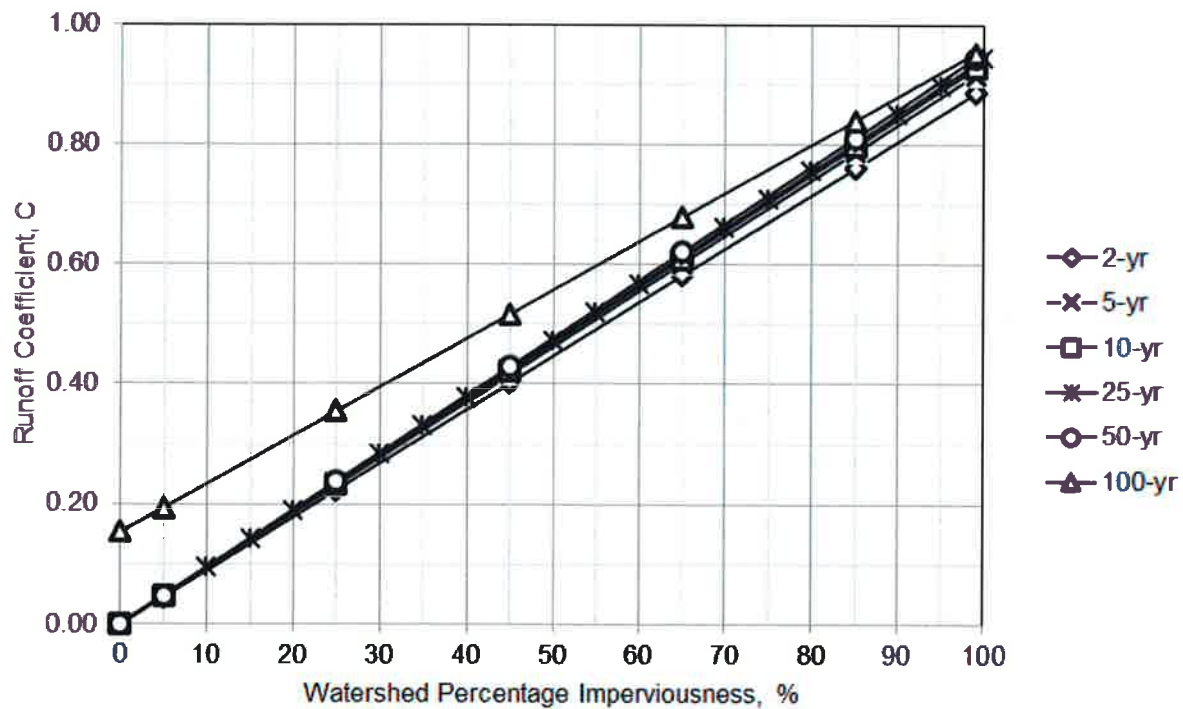


Figure 6-1. Runoff coefficient vs. watershed imperviousness NRCS HSG A

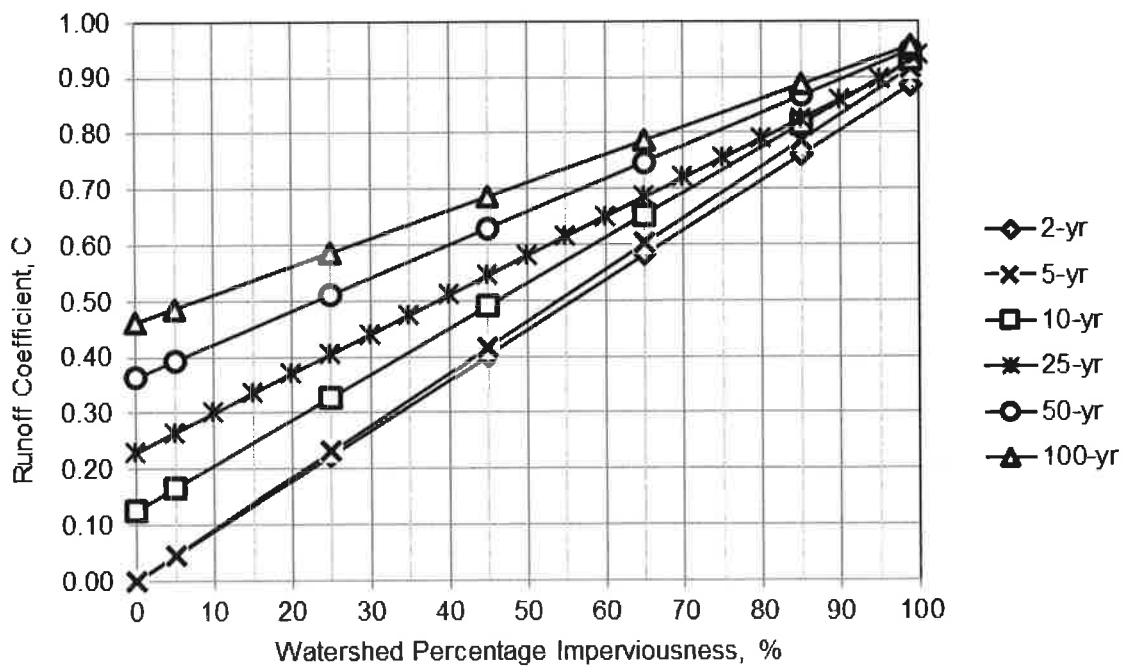


Figure 6-2. Runoff coefficient vs. watershed imperviousness NRCS HSG B

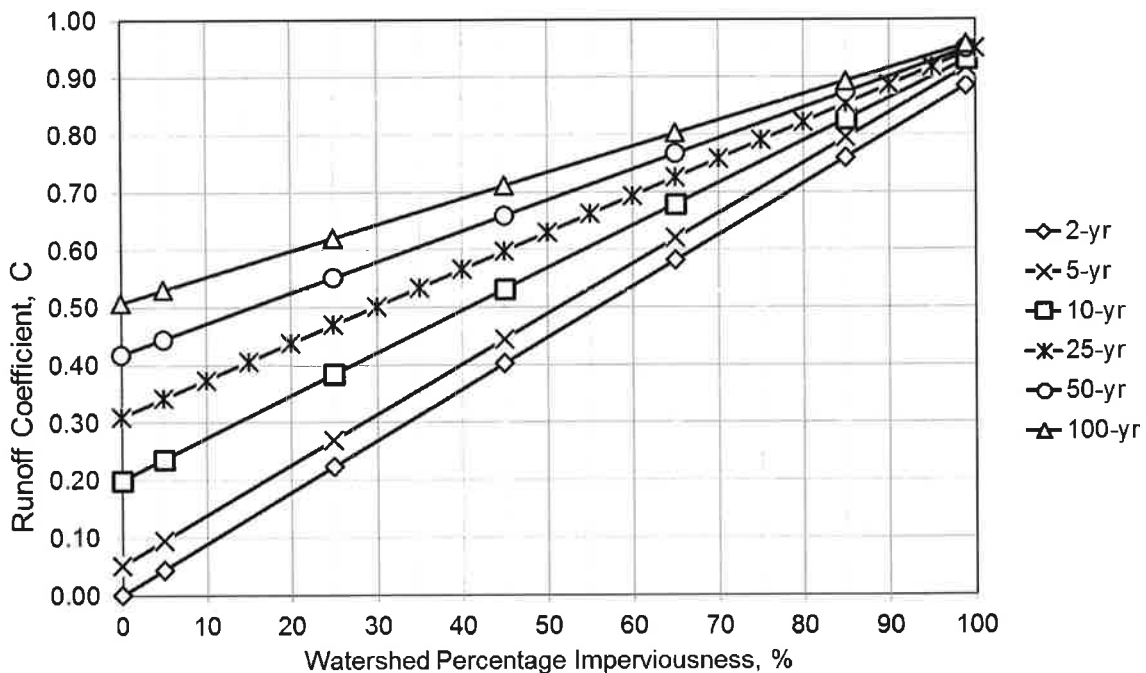


Figure 6-3. Runoff coefficient vs. watershed imperviousness NRCS HSG C and D

Compark South

TOWN OF PARKER, COLORADO PROPOSED IMPERVIOUSNESS CALCULATIONS 7-20-20

CVS-1

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	1.18	1.18
Landscape	2%	2.67	0.05

Total Area: 3.85

Percentage Imperviousness: 32.0%
C₂ (Table 6-4, Type C Soil): 0.28
C₅ (Table 6-4, Type C Soil): 0.33
C₁₀₀ (Table 6-4, Type C Soil): 0.65

CVS-2

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	1.09	1.09
Landscape	2%	0.33	0.01

Total Area: 1.42

Percentage Imperviousness: 77.0%
C₂ (Table 6-4, Type C Soil): 0.69
C₅ (Table 6-4, Type C Soil): 0.72
C₁₀₀ (Table 6-4, Type C Soil): 0.85

CVS-3

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.57	0.57
Landscape	2%	0.37	0.01

Total Area: 0.94

Percentage Imperviousness: 62.0%
C₂ (Table 6-4, Type B Soil): 0.55
C₅ (Table 6-4, Type B Soil): 0.58
C₁₀₀ (Table 6-4, Type B Soil): 0.76

CVS-4

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.56	0.56
Landscape	2%	0.61	0.01

Total Area: 1.17

Percentage Imperviousness: 49.0%
C₂ (Table 6-4, Type B Soil): 0.44
C₅ (Table 6-4, Type B Soil): 0.46
C₁₀₀ (Table 6-4, Type B Soil): 0.69

*Note: Impervious percentages were determined using Figures 3-3, 3-4, 3-5 from Volume 3 of the Urban Storm Drainage Criteria Manual.

CVS-4A

Percentage Imperviousness*:	55.0%
C₂ (Table 6-4, Type B Soil):	0.49
C₅ (Table 6-4, Type B Soil):	0.51
C₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-5

Percentage Imperviousness*:	45.0%
C₂ (Table 6-4, Type B Soil):	0.40
C₅ (Table 6-4, Type B Soil):	0.42
C₁₀₀ (Table 6-4, Type B Soil):	0.67

CVS-6

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.28	0.28
Landscape	2%	0.37	0.01
Total Area:		0.65	

Percentage Imperviousness:	45.0%
C₂ (Table 6-4, Type B Soil):	0.40
C₅ (Table 6-4, Type B Soil):	0.42
C₁₀₀ (Table 6-4, Type B Soil):	0.67

CVS-6A

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.00	0.00
Landscape	2%	0.78	0.02
Total Area:		0.78	

Percentage Imperviousness:	2.0%
C₂ (Table 6-4, Type B Soil):	0.02
C₅ (Table 6-4, Type B Soil):	0.02
C₁₀₀ (Table 6-4, Type B Soil):	0.46

CVS-7

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.86	0.86
Landscape	2%	0.25	0.01
Total Area:		1.11	

Percentage Imperviousness:	78.0%
C₂ (Table 6-4, Type B Soil):	0.69
C₅ (Table 6-4, Type B Soil):	0.73
C₁₀₀ (Table 6-4, Type B Soil):	0.84

*Note: Impervious percentages were determined using Figures 3-3, 3-4, 3-5 from Volume 3 of the Urban Storm Drainage Criteria Manual.

CVS-8

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.86	0.86
Landscape	2%	0.73	0.01

Total Area: 1.59

Percentage Imperviousness: 55.0%

C₂ (Table 6-4, Type B Soil): 0.49

C₅ (Table 6-4, Type B Soil): 0.51

C₁₀₀ (Table 6-4, Type B Soil): 0.72

CVS-9

Percentage Imperviousness*: 55.0%

C₂ (Table 6-4, Type B Soil): 0.49

C₅ (Table 6-4, Type B Soil): 0.51

C₁₀₀ (Table 6-4, Type B Soil): 0.72

CVS-9A

Percentage Imperviousness*: 55.0%

C₂ (Table 6-4, Type B Soil): 0.49

C₅ (Table 6-4, Type B Soil): 0.51

C₁₀₀ (Table 6-4, Type B Soil): 0.72

CVS-10

Percentage Imperviousness*: 51.0%

C₂ (Table 6-4, Type B Soil): 0.45

C₅ (Table 6-4, Type B Soil): 0.47

C₁₀₀ (Table 6-4, Type B Soil): 0.70

CVS-10A

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.25	0.25
Landscape	2%	0.15	0.00

Total Area: 0.40

Percentage Imperviousness: 63.0%

C₂ (Table 6-4, Type B Soil): 0.56

C₅ (Table 6-4, Type B Soil): 0.59

C₁₀₀ (Table 6-4, Type B Soil): 0.76

CVS-11

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	2.08	2.08
Landscape	2%	1.39	0.03

Total Area: 3.47

Percentage Imperviousness: 78.0%

C₂ (Table 6-4, Type B Soil): 0.69

C₅ (Table 6-4, Type B Soil): 0.73

C₁₀₀ (Table 6-4, Type B Soil): 0.84

*Note: Impervious percentages were determined using Figures 3-3, 3-4, 3-5 from Volume 3 of the Urban Storm Drainage Criteria Manual.

CVS-12

Percentage Imperviousness*:	55.0%
C ₂ (Table 6-4, Type B Soil):	0.49
C ₅ (Table 6-4, Type B Soil):	0.51
C ₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-12A

Percentage Imperviousness*:	55.0%
C ₂ (Table 6-4, Type B Soil):	0.49
C ₅ (Table 6-4, Type B Soil):	0.51
C ₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-12B

Percentage Imperviousness*:	55.0%
C ₂ (Table 6-4, Type B Soil):	0.49
C ₅ (Table 6-4, Type B Soil):	0.51
C ₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-13

Percentage Imperviousness*:	55.0%
C ₂ (Table 6-4, Type B Soil):	0.49
C ₅ (Table 6-4, Type B Soil):	0.51
C ₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-13A

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.76	0.76
Landscape	2%	0.48	0.01

Total Area: 1.24

Percentage Imperviousness:	62.0%
C ₂ (Table 6-4, Type B Soil):	0.55
C ₅ (Table 6-4, Type B Soil):	0.58
C ₁₀₀ (Table 6-4, Type B Soil):	0.76

CVS-13B

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.79	0.79
Landscape	2%	0.48	0.01

Total Area: 1.27

Percentage Imperviousness:	63.0%
C ₂ (Table 6-4, Type B Soil):	0.56
C ₅ (Table 6-4, Type B Soil):	0.59
C ₁₀₀ (Table 6-4, Type B Soil):	0.76

*Note: Impervious percentages were determined using Figures 3-3, 3-4, 3-5 from Volume 3 of the Urban Storm Drainage Criteria Manual.

CVS-13C

Percentage Imperviousness*:	55.0%
C₂ (Table 6-4, Type B Soil):	0.49
C₅ (Table 6-4, Type B Soil):	0.51
C₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-14

Percentage Imperviousness:	55.0%
C₂ (Table 6-4, Type B Soil):	0.49
C₅ (Table 6-4, Type B Soil):	0.51
C₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-14A

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.00	0.00
Landscape	2%	4.12	0.08

Total Area: 4.12

Percentage Imperviousness:	2.0%
C₂ (Table 6-4, Type B Soil):	0.02
C₅ (Table 6-4, Type B Soil):	0.02
C₁₀₀ (Table 6-4, Type B Soil):	0.46

CVS-14B

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.18	0.18
Landscape	2%	2.55	0.05

Total Area: 2.73

Percentage Imperviousness:	8.0%
C₂ (Table 6-4, Type B Soil):	0.07
C₅ (Table 6-4, Type B Soil):	0.07
C₁₀₀ (Table 6-4, Type B Soil):	0.49

CVS-14C

Percentage Imperviousness:	55.0%
C₂ (Table 6-4, Type B Soil):	0.49
C₅ (Table 6-4, Type B Soil):	0.51
C₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-15

Percentage Imperviousness*:	55.0%
C₂ (Table 6-4, Type B Soil):	0.49
C₅ (Table 6-4, Type B Soil):	0.51
C₁₀₀ (Table 6-4, Type B Soil):	0.72

*Note: Impervious percentages were determined using Figures 3-3, 3-4, 3-5 from Volume 3 of the Urban Storm Drainage Criteria Manual.

CVS-15A

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.55	0.55
Landscape	2%	0.40	0.01

Total Area: 0.95

Percentage Imperviousness: 59.0%

C₂ (Table 6-4, Type B Soil): 0.53

C₅ (Table 6-4, Type B Soil): 0.55

C₁₀₀ (Table 6-4, Type B Soil): 0.74

CVS-16

Percentage Imperviousness*: 55.0%

C₂ (Table 6-4, Type B Soil): 0.49

C₅ (Table 6-4, Type B Soil): 0.51

C₁₀₀ (Table 6-4, Type B Soil): 0.72

CVS-17

Percentage Imperviousness*: 55.0%

C₂ (Table 6-4, Type B Soil): 0.49

C₅ (Table 6-4, Type B Soil): 0.51

C₁₀₀ (Table 6-4, Type B Soil): 0.72

CVS-18

Percentage Imperviousness*: 50.0%

C₂ (Table 6-4, Type B Soil): 0.45

C₅ (Table 6-4, Type B Soil): 0.47

C₁₀₀ (Table 6-4, Type B Soil): 0.70

CVS-19

Percentage Imperviousness*: 73.0%

C₂ (Table 6-4, Type B Soil): 0.65

C₅ (Table 6-4, Type B Soil): 0.68

C₁₀₀ (Table 6-4, Type B Soil): 0.81

CVS-20

Percentage Imperviousness*: 55.0%

C₂ (Table 6-4, Type B Soil): 0.49

C₅ (Table 6-4, Type B Soil): 0.51

C₁₀₀ (Table 6-4, Type B Soil): 0.72

CVS-21

Percentage Imperviousness*: 55.0%

C₂ (Table 6-4, Type B Soil): 0.49

C₅ (Table 6-4, Type B Soil): 0.51

C₁₀₀ (Table 6-4, Type B Soil): 0.72

*Note: Impervious percentages were determined using Figures 3-3, 3-4, 3-5 from Volume 3 of the Urban Storm Drainage Criteria Manual.

CVS-22

Percentage Imperviousness*:	55.0%
C₂ (Table 6-4, Type B Soil):	0.49
C₅ (Table 6-4, Type B Soil):	0.51
C₁₀₀ (Table 6-4, Type B Soil):	0.72

CVS-23

28,409 sf Pavement & Bldg & 9,488 sf Lawn

Percentage Imperviousness*:	75.0%
C₂ (Table 6-4, Type B Soil):	0.67
C₅ (Table 6-4, Type B Soil):	0.70
C₁₀₀ (Table 6-4, Type B Soil):	0.82

BEL-1

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	1.23	1.23
Landscape	2%	2.50	0.05

Total Area: 3.73

Percentage Imperviousness:	34.0%
C₂ (Table 6-4, Type B Soil):	0.30
C₅ (Table 6-4, Type B Soil):	0.32
C₁₀₀ (Table 6-4, Type B Soil):	0.62

BEL-2

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	0.68	0.68
Landscape	2%	0.70	0.01

Total Area: 1.38

Percentage Imperviousness:	77.0%
C₂ (Table 6-4, Type B Soil):	0.69
C₅ (Table 6-4, Type B Soil):	0.72
C₁₀₀ (Table 6-4, Type B Soil):	0.83

BEL-3

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	1.34	1.34
Landscape	2%	5.42	0.11

Total Area: 6.76

Percentage Imperviousness:	21.0%
C₂ (Table 6-4, Type B Soil):	0.19
C₅ (Table 6-4, Type B Soil):	0.20
C₁₀₀ (Table 6-4, Type B Soil):	0.56

BEL-4

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	1.36	1.36
Landscape	2%	0.39	0.01

Total Area: 1.75

Percentage Imperviousness:	78.0%
C₂ (Table 6-4, Type B Soil):	0.69
C₅ (Table 6-4, Type B Soil):	0.73
C₁₀₀ (Table 6-4, Type B Soil):	0.84

*Note: Impervious percentages were determined using Figures 3-3, 3-4, 3-5 from Volume 3 of the Urban Storm Drainage Criteria Manual.

BEL-5

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	3.43	3.43
Landscape	2%	1.12	0.02

Total Area: 4.55

Percentage Imperviousness: 76.0%
C₂ (Table 6-4, Type B Soil): 0.68
C₅ (Table 6-4, Type B Soil): 0.71
C₁₀₀ (Table 6-4, Type B Soil): 0.83

BEL-6

Land Use	Imperviousness (UDFCD Table 6-3)	Total Area (Acres)	Impervious Area (Acres)
Pavement/Hardscape	100%	2.77	2.77
Landscape	2%	1.18	0.02

Total Area: 3.95

Percentage Imperviousness: 71.0%
C₂ (Table 6-4, Type B Soil): 0.63
C₅ (Table 6-4, Type B Soil): 0.66
C₁₀₀ (Table 6-4, Type B Soil): 0.80

**PROPOSED DRAINAGE BASINS
STANDARD FORM SF-2
TIME OF CONCENTRATION**

PROJECT: Compark Village South, Filing 1

NOTES:
 $T_1 = [0.395 \times (1.1 - C_u) \times L^{0.75}] / (S^{0.33})$
 $T_1 = L / (60 \times V)$ (Velocity from UDFCD Fig. RO-1)
 $T_c \text{ Check} = 10 + L/180$ (Urbanized Basins Only)

JOB NO: CLCPKGC3

CALCULATED BY: RAK DATE: November 16, 2016
 REVISED BY: DATE:

SUB-BASIN DATA			INITIAL/OVERLAND TIME (Ti)			TRAVEL TIME (Tt) - (GRASS SWALE)				TRAVEL TIME (Tt) - (PAVEMENT/CURB & GUTTER)				Tc CHECK (urbanized basins)		FINAL Tc (min)	REMARKS
AREA DESIGNATION	ROUGHNESS COEFFICIENT, C100	AREA, A (acres)	FLOW LENGTH, (ft)	SLOPE (%)	INITIAL TIME, T1 (min)	FLOW LENGTH, (ft)	SLOPE (%)	VELOCITY (ft/s)	TRAVEL TIME Tt (min)	FLOW LENGTH, (ft)	SLOPE (%)	VELOCITY (ft/s)	TRAVEL TIME Tt (min)	TOTAL LENGTH (ft)	MAXIMUM Tc = (L/180 + 10)		
CVS-1 (Inlet 1-3)	0.65	3.85	0	0.0%	0.0	0	0.0%	0.0	0.0	1172	2.0%	2.8	6.9	1172	16.5	6.9	
CVS-2 (Inlet 2-3)	0.85	1.42	0	0.0%	0.0	0	0.0%	0.0	0.0	1125	2.0%	2.8	6.6	1125	16.3	6.6	
CVS-3 (Inlet 1-4)	0.76	0.94	0	0.0%	0.0	0	0.0%	0.0	0.0	1055	2.0%	2.8	6.2	1055	15.9	6.2	
CVS-4 (Inlet 2-4)	0.69	1.17	0	0.0%	0.0	0	0.0%	0.0	0.0	600	1.5%	2.4	4.1	600	13.3	4.1	
CVS-4A (Inlet 3-4)	0.72	2.20	100	2.0%	5.4	180	2.0%	1.0	3.0	416	1.5%	2.4	2.8	696	13.9	11.3	
CVS-5 (Inlet 5-4)	0.67	2.19	100	4.0%	4.9	130	5.5%	1.6	1.3	380	1.3%	2.3	2.8	610	13.4	9.0	
CVS-6 (Inlet 6-4)	0.67	0.58	-	-	-	-	-	-	-	-	-	-	-	-	-	5.0	Minimum
CVS-6A (FES 2-4)	0.46	0.78	-	-	-	-	-	-	-	-	-	-	-	-	-	5.0	Minimum
CVS-7 (Inlet 1-6)	0.84	1.11	0	0.0%	0.0	0	0.0%	0.0	0.0	904	0.6%	1.5	10.2	904	15.0	10.2	
CVS-8 (Inlet 2-6)	0.72	1.59	0	0.0%	0.0	0	0.0%	0.0	0.0	897	0.6%	1.5	10.1	897	15.0	10.1	
CVS-9 (Inlet 4-5A)	0.72	2.41	100	2.0%	5.4	180	2.0%	1.0	3.0	440	1.1%	2.1	3.5	720	14.0	11.9	
CVS-9A (Inlet 3-4)	0.72	0.37	-	-	-	-	-	-	-	-	-	-	-	-	-	5.0	Minimum
CVS-10 (Inlet 5-5A)	0.70	2.78	100	2.0%	5.7	180	2.0%	1.0	3.0	594	1.0%	2.0	5.0	874	14.9	13.7	
CVS-10A (Inlet 5-4A)	0.76	0.40	100	2.0%	4.8	55	2.0%	1.0	0.9	5	1.0%	2.0	0.0	160	10.9	5.8	
CVS-11 (Inlet 1-5)	0.84	2.03	0	0.0%	0.0	0	0.0%	0.0	0.0	1046	0.5%	1.4	12.3	1046	15.8	12.3	
CVS-12 (Inlet 2-5)	0.72	4.58	100	1.5%	5.9	48	1.5%	0.9	0.9	599	1.0%	2.0	5.0	747	14.2	11.9	
CVS-12A (Inlet 3-5)	0.72	0.81	100	2.0%	5.4	120	2.0%	1.0	2.0	30	1.0%	2.0	0.3	250	11.4	7.7	
CVS-12B (Inlet 3-5)	0.72	1.31	100	2.0%	5.4	190	2.0%	1.0	3.2	350	1.8%	2.7	2.2	640	13.6	10.8	
CVS-13 (Inlet 4-5)	0.72	1.16	100	4.7%	4.1	81	2.0%	1.0	1.4	230	1.0%	2.0	1.9	411	12.3	7.4	
CVS 13A (Inlet 6-5A)	0.76	1.20	55	2.0%	3.6	0	0.0%	0.0	0.0	817	1.8%	2.7	5.1	872	14.8	8.7	
CVS 13B (Inlet 4-5B)	0.76	1.53	55	2.0%	3.6	0	0.0%	0.0	0.0	877	1.8%	2.7	5.4	932	15.2	9.0	
CVS 13C (Inlet 4-5C)	0.72	1.26	100	2.0%	5.4	81	2.0%	1.0	1.4	250	1.0%	2.0	2.1	431	12.4	8.8	
CVS-14 (Inlet 6-5)	0.72	1.89	100	2.0%	5.4	40	2.0%	1.0	0.7	608	1.0%	2.0	5.1	748	14.2	11.1	
CVS-14A (Inlet 7-5)	0.46	4.01	100	5.0%	6.8	1258	2.0%	1.0	21.2	0	0.0%	0.0	0.0	1358	17.5	17.5	
CVS-14B (Inlet 6-5)	0.49	2.73	100	5.0%	6.4	512	3.0%	1.2	7.0	5	1.0%	2.0	0.0	617	13.4	13.4	
CVS-14C (Inlet 5-5B)	0.72	1.93	100	2.0%	5.4	40	2.0%	1.0	0.7	634	1.0%	2.0	5.3	774	14.3	11.4	
CVS-15 (Inlet 5-5)	0.72	2.01	100	2.0%	5.4	170	2.0%	1.0	2.9	619	1.0%	2.0	5.2	889	14.9	13.4	
CVS-15A (Inlet 6-5B)	0.74	0.95	55	2.0%	3.8	0	0.0%	0.0	0.0	698	2.0%	2.8	4.1	753	14.2	7.9	
CVS-16 (Inlet 2-11A)	0.72	1.37	100	1.5%	5.9	49	1.5%	0.9	1.0	376	1.0%	2.0	3.1	525	12.9	10.0	
CVS-17 (Inlet 2-11)	0.72	1.44	100	5.3%	3.9	129	5.3%	1.6	1.3	376	1.0%	2.0	3.1	605	13.4	8.4	
CVS-17A	0.72	2.18	100	4.5%	4.2	544	1.0%	0.7	13.0					644	13.6	13.6	
CVS-18	0.70	2.69	100	15.5%	2.9	115	3.0%	1.2	1.6	655	1.0%	2.0	5.5	870	14.8	10.0	
CVS-19	0.81	1.61	100	3.5%	3.4	200	3.5%	1.3	2.5	0	0.0%	0.0	0.0	300	11.7	6.0	
CVS-20	0.72	1.62	100	2.0%	5.4	17	2.0%	1.0	0.3	570	1.0%	2.0	4.8	687	13.8	10.4	
CVS-21	0.72	3.86	100	0.0%	21.0	164	3.3%	1.3	2.1	833	1.1%	2.1	6.6	1097	16.1	16.1	
CVS-22 (Inlet 2-10A)	0.72	0.87	100	2.6%	4.9	0	0.0%	0.0	0.0	233	2.6%	3.2	1.2	333	11.9	6.2	
CVS-23 (Inlet 2-10)	0.82	0.87	100	2.7%	3.6					229	1.0%	2.0	1.9	329	11.8	5.5	
BEL-1 (Inlet 2-1)	0.62	3.73	100	1.5%	7.6	466	1.5%	0.9	9.1	462	0.8%	1.8	4.4	508	12.8	12.8	
BEL-2 (Inlet 1-1)	0.83	1.38	0	0.0%	0.0	0	0.0%	0.0	0.0	1123	1.5%	2.4	7.6	1123	16.2	7.6	
BEL-3 (Inlet 2-2)	0.56	6.76	100	1.5%	8.6	232	1.5%	0.9	4.5	462	0.8%	1.8	4.3	794	14.4	14.4	
BEL-4 (Inlet 1-2)	0.84	1.75	0	0.0%	0.0	0	0.0%	0.0	0.0	825	0.8%	1.7	7.9	825	14.6	7.9	
BEL-5	0.83	4.55	100	3.1%	3.4	0	0.0%	0.0	0.0	1602	3.1%	3.5	7.6	1702	19.5	11.0	
BEL-6	0.80	3.95	100	9.8%	2.5	0	0.0%	0.0	0.0	1009	3.0%	3.5	4.9	1109	16.2	7.4	

PROPOSED DRAINAGE BASINS
STANDARD FORM SF-3
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)

PROJECT:

COMPARK VILLAGE SOUTH, FILINGS 1 & 2

CLCPKC3

CALCULATED BY:

RAK

DATE:

November 18, 2016

Manning's n-value =0.013

2-YEAR

REVISED BY:

ASD

DATE:

July 20, 2020

Basin ID	Design Point	DIRECT RUNOFF						Total Runoff, Q (cfs)	INLET		STORM SEWER			REMARKS
		Area (ac)	Tc (min.)	Runoff Coefficient, C	Intensity, i (in/hr)	C*A (Acres)	Direct Runoff, Q (cfs)		Intercepted (cfs)	Bypass (cfs)	Design Flow (cfs)	Slope (%)	Pipe Size (inches)	
CVS-1 (Inlet 1-3)	1	3.85	6.9	0.28	4.3	1.10	4.7	4.7	4.7	0.0	8.9	3.1%	24	
CVS-2 (Inlet 2-3)	2	1.42	6.6	0.69	4.3	0.97	4.2	4.2	4.2	0.0	4.2	10.0%	24	
CVS-3 (Inlet 1-4)	3	0.94	6.2	0.55	4.4	0.52	2.3	2.3	2.3	0.0	2.3	1.7%	18	
CVS-4 (Inlet 2-4)	4	1.17	4.1	0.44	5.0	0.51	2.5	2.5	2.5	0.0	2.5	0.9%	18	
CVS-4A (Inlet 3-4)	4A	2.20	11.3	0.49	3.6	1.08	3.9	3.9	3.9	0.0	3.9	1.0%	18	
CVS-5 (Inlet 5-4)	5	2.19	9.0	0.40	3.9	0.88	3.4	3.4	3.4	0.0	3.4	1.0%	18	
CVS-6 (Inlet 6-4)	6	0.58	5.0	0.40	4.7	0.23	1.1	1.1	1.1	0.0	9.6	1.7%	36	
CVS-6A (FES 2-4)	6A	0.78	5.0	0.02	4.7	0.01	0.1	0.1	0.1	0.0	8.5	3.1%	36	
CVS-7 (Inlet 1-6)	7	1.11	10.2	0.69	3.7	0.77	2.9	2.9	2.9	0.0	5.8	3.0%	24	
CVS-8 (Inlet 2-6)	8	1.59	10.1	0.49	3.7	0.78	2.9	2.9	2.9	0.0	2.9	1.4%	24	
CVS-9 (Inlet 4-5A)	9	2.41	11.9	0.49	3.5	1.18	4.1	4.1	4.1	0.0	4.1	1.2%	18	
CVS-9A (Inlet 4-4)	9A	0.37	5.0	0.49	4.7	0.18	0.9	0.9	0.9	0.0	0.9	1.0%	18	
CVS-10 (Inlet 5-5A)	10	2.78	13.7	0.45	3.3	1.26	4.2	4.2	4.2	0.0	4.2	1.2%	18	
CVS-10A (Inlet 5-4A)	10A	0.40	5.8	0.56	4.5	0.22	1.0	1.0	1.0	0.0	1.0	1.0%	18	
CVS-11 (Inlet 1-5)	11	2.03	12.3	0.69	3.4	1.41	4.9	4.9	4.9	0.0	12.8	0.8%	36	
CVS-12 (Inlet 2-5)	12	4.58	11.9	0.49	3.5	2.24	7.9	7.9	7.9	0.0	7.9	0.7%	36	
CVS-12A (Inlet 3-5)	12	0.81	7.7	0.49	4.1	0.40	1.6	1.6	1.6	0.0	40.0	1.9%	42	
CVS-12B (Inlet 3-5)	12A	1.31	10.8	0.49	3.6	0.64	2.3	2.3	2.3	0.0	40.0	1.9%	42	
CVS-13 (Inlet 4-5)	13	1.16	7.4	0.49	4.2	0.57	2.4	2.4	2.4	0.0	2.4	3.6%	18	
CVS 13A (Inlet 6-5A)	13A	1.20	8.7	0.55	4.0	0.66	2.6	2.6	2.6	0.0	2.6	1.0%	18	
CVS 13B (Inlet 4-5B)	13B	1.53	9.0	0.56	3.9	0.86	3.4	3.4	3.4	0.0	3.4	1.0%	18	
CVS 13C (Inlet 4-5C)	13C	1.26	8.8	0.49	3.9	0.62	2.4	2.4	2.4	0.0	2.4	1.0%	18	
CVS-14 (Inlet 6-5)	14	1.89	11.1	0.49	3.6	0.93	3.3	3.3	3.3	0.0	8.2	3.2%	30	
CVS-14A (Inlet 7-5)	14A	4.01	17.5	0.02	2.9	0.07	0.2	0.2	0.2	0.0	4.3	4.7%	24	
CVS-14B (Inlet 6-5)	14	2.73	13.4	0.07	3.3	0.19	0.6	0.6	0.6	0.0	8.6	3.4%	30	
CVS-14C (Inlet 5-5B)	14C	1.93	11.4	0.49	3.6	0.94	3.4	3.4	3.4	0.0	3.4	2.8%	18	
CVS-15 (Inlet 5-5)	15	2.05	13.4	0.49	3.3	1.00	3.3	3.3	3.3	0.0	3.3	5.0%	18	
CVS-15A (Inlet 6-5B)	15A	0.95	7.9	0.53	4.1	0.50	2.0	2.0	2.0	0.0	2.0	1.0%	18	
CVS-16 (Inlet 2-11A)	16	1.37	10.0	0.49	3.8	0.67	2.5	2.5	6.4	0.0	2.5	5.2%	18	
CVS-17 (Inlet 2-11)	17	1.44	8.4	0.49	4.0	0.70	1.9	1.9	6.8	0.0	1.9	5.2%	18	
CVS-17A	17A	2.18	13.6	0.49	3.3	1.07	3.5	3.5	-	-	-	-	-	
CVS-18	18	2.69	10.0	0.45	3.8	1.20	4.5	4.5	-	-	-	-	-	
CVS-19	19	1.61	6.0	0.65	4.5	1.05	4.7	4.7	-	-	-	-	-	
CVS-20	20	1.80	10.4	0.49	3.7	0.88	3.3	3.3	-	-	-	-	-	
CVS-21	21	3.88	16.1	0.49	3.1	1.90	5.8	5.8	-	-	-	-	-	
CVS-22 (Inlet 2-10A)	22	0.87	6.2	0.49	4.4	0.43	1.9	1.9	5.6	0.0	1.9	1.0%	18	
CVS-23 (Inlet 2-10)	23	0.87	5.5	0.67	4.6	0.58	2.7	2.7	7.1	0.0	2.7	1.0%	18	
BEL-1 (Inlet 2-1)	B1	3.73	12.8	0.30	3.4	1.13	3.8	3.8	3.8	0.0	5.9	3.3%	36	
BEL-2 (Inlet 1-1)	B2	1.38	7.6	0.69	4.2	0.95	3.9	3.9	3.9	0.0	8.4	0.9%	36	
BEL-3 (Inlet 2-2)	B3	6.76	14.4	0.19	3.2	1.26	4.1	4.1	4.1	0.0	6.6	3.2%	36	
BEL-4 (Inlet 1-2)	B4	1.75	7.9	0.69	4.1	1.21	5.0	5.0	5.0	0.0	11.6	2.9%	36	
BEL-5	B5	4.55	11.0	0.68	3.6	3.08	11.1	11.1	-	-	-	-	-	
BEL-6	B6	3.95	7.4	0.63	4.2	2.50	10.5	10.5	-	-	-	-	-	

PROPOSED DRAINAGE BASINS
STANDARD FORM SF-3
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)

PROJECT:

COMPARK VILLAGE SOUTH, FILINGS 1 & 2

CLCPKC3

CALCULATED BY:
REVISED BY:

RAK
ASD

DATE: November 18, 2016
DATE: July 20, 2020

Manning's n-value =0.013

5-YEAR

Basin ID	Design Point	DIRECT RUNOFF							INLET		STORM SEWER			REMARKS
		Area (ac)	Tc (min.)	Runoff Coefficient, C	Intensity, I (in/hr)	C*A (Acres)	Direct Runoff, Q (cfs)	Total Runoff, Q (cfs)	Intercepted (cfs)	Bypass (cfs)	Design Flow (cfs)	Slope (%)	Pipe Size (inches)	
CVS-1 (Inlet 1-3)	1	3.85	6.9	0.33	4.3	1.27	5.5	5.5	5.5	0.0	10.0	3.1%	24	
CVS-2 (Inlet 2-3)	2	1.42	6.6	0.72	4.3	1.03	4.5	4.5	4.5	0.0	4.5	10.0%	24	
CVS-3 (Inlet 1-4)	3	0.94	6.2	0.58	4.4	0.54	2.4	2.4	2.4	0.0	2.4	1.7%	18	
CVS-4 (Inlet 2-4)	4	1.17	4.1	0.46	5.0	0.53	2.6	2.6	2.6	0.0	2.6	0.9%	18	
CVS-4A (Inlet 3-4)	4A	2.20	11.3	0.51	3.6	1.13	4.0	4.0	4.0	0.0	4.0	1.0%	18	
CVS-5 (Inlet 5-4)	5	2.19	9.0	0.42	3.9	0.92	3.6	3.6	3.6	0.0	3.6	1.0%	18	
CVS-6 (Inlet 6-4)	6	0.58	5.0	0.42	4.7	0.24	1.1	1.1	1.1	0.0	9.6	1.7%	36	
CVS-6A (FES 2-4)	6A	0.78	5.0	0.02	4.7	0.01	0.1	0.1	0.1	0.0	8.5	3.1%	36	
CVS-7 (Inlet 1-6)	7	1.11	10.2	0.73	3.7	0.81	3.0	3.0	3.0	0.0	6.0	3.0%	24	
CVS-8 (Inlet 2-6)	8	1.59	10.1	0.51	3.7	0.81	3.0	3.0	3.0	0.0	3.0	1.4%	24	
CVS-9 (Inlet 4-5A)	9	2.41	11.9	0.51	3.5	1.23	4.3	4.3	4.3	0.0	4.3	1.2%	18	
CVS-9A (Inlet 4-4)	9A	0.37	5.0	0.51	4.7	0.19	0.9	0.9	0.9	0.0	0.9	1.0%	18	
CVS-10 (Inlet 5-5A)	10	2.78	13.7	0.47	3.3	1.32	4.3	4.3	4.3	0.0	4.3	1.2%	18	
CVS-10A (Inlet 5-4A)	10A	0.40	5.8	0.59	4.5	0.23	1.1	1.1	1.1	0.0	1.1	1.0%	18	
CVS-11 (Inlet 1-5)	11	2.03	12.3	0.73	3.4	1.47	5.1	5.1	5.1	0.0	13.3	0.8%	36	
CVS-12 (Inlet 2-5)	12	4.58	11.9	0.51	3.5	2.34	8.2	8.2	8.2	0.0	8.2	0.7%	36	
CVS-12A (Inlet 3-5)	12	0.81	7.7	0.51	4.1	0.41	1.7	1.7	1.7	0.0	41.4	1.9%	42	
CVS-12B (Inlet 3-5)	12A	1.31	10.8	0.51	3.6	0.67	2.4	2.4	2.4	0.0	41.4	1.9%	42	
CVS-13 (Inlet 4-5)	13	1.16	7.4	0.51	4.2	0.59	2.5	2.5	2.5	0.0	2.5	3.6%	18	
CVS 13A (Inlet 6-5A)	13A	1.20	8.7	0.58	4.0	0.69	2.7	2.7	2.7	0.0	2.7	1.0%	18	
CVS 13B (Inlet 4-5B)	13B	1.53	9.0	0.59	3.9	0.90	3.5	3.5	3.5	0.0	3.5	1.0%	18	
CVS 13C (Inlet 4-5C)	13C	1.26	8.8	0.51	3.9	0.64	2.5	2.5	2.5	0.0	2.5	1.0%	18	
CVS-14 (Inlet 6-5)	14	1.89	11.1	0.51	3.6	0.97	3.5	3.5	3.5	0.0	8.5	3.2%	30	
CVS-14A (Inlet 7-5)	14A	4.01	17.5	0.02	2.9	0.07	0.2	0.2	0.2	0.0	4.3	4.7%	24	
CVS-14B (Inlet 6-5)	14	2.73	13.4	0.07	3.3	0.20	0.7	0.7	0.7	0.0	8.8	3.4%	30	
CVS-14C (Inlet 5-5B)	14C	1.93	11.4	0.51	3.6	0.99	3.5	3.5	3.5	0.0	3.5	2.8%	18	
CVS-15 (Inlet 5-5)	15	2.01	13.4	0.51	3.3	1.03	3.4	3.4	3.4	0.0	3.4	5.0%	18	
CVS-15A (Inlet 6-5B)	15A	0.95	7.9	0.55	4.1	0.52	2.1	2.1	2.1	0.0	2.1	1.0%	18	
CVS-16 (Inlet 2-11A)	16	1.37	10.0	0.51	3.8	0.70	2.6	2.6	6.4	0.0	2.6	5.2%	18	
CVS-17 (Inlet 2-11)	17	1.44	8.4	0.51	4.0	0.74	3.0	3.0	6.8	0.0	3.0	5.2%	18	
CVS-18	18	2.69	10.0	0.47	3.8	1.25	4.7	4.7	-	-	-	-	-	
CVS-19	19	1.61	6.0	0.68	4.5	1.09	4.9	4.9	-	-	-	-	-	
CVS-20	20	1.80	10.4	0.51	3.7	0.92	3.4	3.4	-	-	-	-	-	
CVS-21	21	3.88	16.1	0.51	3.1	1.98	6.1	6.1	-	-	-	-	-	
CVS-22 (2-10A)	22	0.87	6.2	0.51	4.4	0.45	2.0	2.0	5.6	0.0	2.0	1.0%	18	
CVS-23 (Inlet 2-10)	23	0.87	5.5	0.70	4.6	0.61	2.8	2.8	7.1	0.0	2.8	1.0%	18	
BEL-1 (Inlet 2-1)	B1	3.73	12.8	0.32	3.4	1.18	4.0	4.0	4.0	0.0	6.1	3.3%	36	
BEL-2 (Inlet 1-1)	B2	1.38	7.6	0.72	4.2	0.99	4.1	4.1	4.1	0.0	8.8	0.9%	36	
BEL-3 (Inlet 2-2)	B3	6.76	14.4	0.20	3.2	1.32	4.2	4.2	4.2	0.0	6.9	3.2%	36	
BEL-4 (Inlet 1-2)	B4	1.75	7.9	0.73	4.1	1.27	5.2	5.2	5.2	0.0	12.1	2.9%	36	
BEL-5	B5	4.55	11.0	0.71	3.6	3.22	11.6	11.6	-	-	-	-	-	
BEL-6	B6	3.95	7.4	0.66	4.2	2.61	10.9	10.9	-	-	-	-	-	

**PROPOSED DRAINAGE BASINS
STANDARD FORM SF-3
STORM DRAINAGE SYSTEM DESIGN
(RATIONAL METHOD PROCEDURE)**

PROJECT: COMPARK VILLAGE SOUTH, FILINGS 1 & 2 CLCPKC3

CALCULATED BY: RAK DATE: November 18, 2016 Manning's n-value =0.013

REVISED BY: asd DATE: July 20, 2020 100-YEAR

Basin ID	Design Point	DIRECT RUNOFF						TOTAL RUNOFF				INLET		STORM SEWER			REMARKS
		Area (ac)	Tc (min.)	Runoff Coefficient, C	Intensity, I (in/hr)	C/A (Acres)	Direct Runoff, Q (cfs)	Tc (min.)	Intensity, I (in/hr)	C/A (Acres)	Total Runoff with Bypass, Q (cfs)	Intercepted (cfs)	Bypass (cfs)	Design Flow (cfs)	Slope (%)	Pipe Size (inches)	
CVS-1 (Inlet 1-3)	1	3.85	6.9	0.65	8.0	2.51	20.2		12.1	2.51	20.2	13.5	6.7	22.5	3.1%	24	Bypass flow goes to CVS-3.
CVS-2 (Inlet 2-3)	2	1.42	6.6	0.85	8.1	1.21	9.9		12.1	1.21	9.9	9.0	1.0	9.0	10.0%	24	Bypass flow goes to CVS-4.
CVS-3 (Inlet 1-4)	3	0.94	6.2	0.76	8.3	0.71	5.9		12.1	0.71	12.6	7.7	4.9	7.7	1.7%	18	Takes bypass flow from CVS-1. Bypass goes to CVS-7.
CVS-4 (Inlet 2-4)	4	1.17	4.1	0.69	9.3	0.81	7.5		12.1	0.81	8.5	8.0	0.5	8.0	0.9%	18	Takes bypass flow from CVS-2. Bypass goes to CVS-8.
CVS-4A (Inlet 3-4)	4A	2.20	11.3	0.72	6.7	1.59	10.7				11.2	11.2	0.0	11.2	1.0%	18	Takes bypass flow from CVS-5.
CVS-5 (Inlet 5-4)	5	2.19	9.0	0.67	7.3	1.48	10.8		12.1	1.48	10.8	9.8	1.0	11.0	1.0%	18	Bypass flow goes to CVS-4A.
CVS-6 (Inlet 6-4)	6	0.58	5.0	0.67	8.8	0.39	3.5		12.1	0.39	3.5	3.5	0.0	51.3	1.7%	36	
CVS-6A (FES 2-4)	6A	0.78	5.0	0.46	8.8	0.36	3.2				3.2	3.2	0.0	51.0	3.1%	36	
CVS-7 (Inlet 1-6)	7	1.11	10.2	0.84	7.0	0.93	6.5		12.1	0.93	11.4	7.3	4.1	15.4	3.0%	24	Takes bypass flow from CVS-3. Bypass goes to CVS-11.
CVS-8 (Inlet 2-6)	8	1.59	10.1	0.72	7.0	1.15	8.1		12.1	1.15	8.6	8.1	0.5	8.1	1.4%	24	Takes bypass flow from CVS-4. Bypass goes to CVS-12.
CVS-9 (Inlet 4-5A)	9	2.41	11.9	0.72	6.5	1.74	11.4		12.1	1.74	11.6	10.2	1.4	10.2	1.2%	18	Bypass flow goes to CVS-12.
CVS-9A (Inlet 4-4)	9A	0.37	5.0	0.72	8.8	0.27	2.4				2.4	2.4	0.0	2.4	1.0%	18	
CVS-10 (Inlet 5-5A)	10	2.78	13.7	0.70	6.2	1.96	12.1		12.1	1.96	12.3	10.6	1.7	10.6	1.2%	18	Takes bypass flow from CVS-10A. Bypass flow goes to CVS-13B.
CVS-10A (Inlet 5-4A)	10A	0.40	5.8	0.76	8.5	0.31	2.6				2.6	2.2	0.4	2.2	1.0%	18	Bypass flow goes to CVS-10
CVS-11 (Inlet 1-5)	11	2.03	12.3	0.84	6.5	1.70	11.0		12.1	1.70	15.1	15.1	0.0	38.7	0.8%	36	Takes bypass flow from CVS-7. 1-31-20 Add Comm Interim
CVS-12 (Inlet 2-5)	12	4.58	11.9	0.72	6.6	3.31	21.7		12.1	3.31	23.6	23.6	0.0	23.6	0.7%	36	Takes bypass flow from CVS-8 and CVS-9.
CVS-12A (Inlet 3-5)	12	0.81	7.7	0.72	7.8	0.59	4.5				4.5	4.5	0.0	137.0	1.9%	42	
CVS-12B (Inlet 3-5)	12A	1.31	10.8	0.72	6.8	0.95	6.5				9.4	9.4	0.0	137.0	1.9%	42	
CVS-13 (Inlet 4-5)	13	1.16	7.4	0.72	7.9	0.84	6.6		12.1	0.84	8.9	8.9	0.0	8.9	3.6%	18	Takes bypass flow from CVS-13A and CVS 13C.
CVS 13A (Inlet 6-5A)	13A	1.20	8.7	0.76	7.4	0.91	6.7				6.7	6.2	0.5	6.2	1.0%	18	Bypass flow goes to CVS-13
CVS 13B (Inlet 4-5B)	13B	1.53	9.0	0.76	7.3	1.17	8.5				9.4	6.9	2.5	6.9	1.0%	18	Takes bypass flow from CVS-10. Bypass flow goes to CVS-13C.
CVS 13C (Inlet 4-5C)	13C	1.26	8.8	0.72	7.4	0.91	6.7				7.9	3.9	4.0	3.9	1.0%	18	Takes bypass flow from CVS 13B. Bypass flow goes to CVS-13
CVS-14 (Inlet 6-5)	14	1.89	11.1	0.72	6.7	1.37	9.2		12.1	1.37	10.1	10.1	0.0	54.4	3.2%	30	Takes bypass from CVS-14C
CVS-14A (Inlet 7-5)	14A	4.01	17.5	0.46	5.5	1.86	10.2				10.2	10.2	0.0	34.8	4.7%	24	
CVS-14B (Inlet 6-5)	14	2.73	13.4	0.49	6.2	1.35	8.4				9.5	9.5	0.0	54.4	3.4%	30	
CVS-14C (Inlet 5-5B)	14C	1.93	11.4	0.72	6.7	1.40	9.3				9.3	7.5	1.8	7.5	2.8%	18	Bypass flow goes to CVS-14
CVS-15 (Inlet 5-5)	15	2.01	13.4	0.72	6.2	1.45	9.0		12.1	1.45	9.1	9.1	0.0	9.1	5.0%	18	Takes bypass flow from CVS-15A
CVS-15A (Inlet 6-5B)	15A	0.95	7.9	0.74	7.7	0.71	5.4				5.4	5.3	0.1	5.3	1.0%	18	
CVS-16 (Inlet 2-11A)	16	1.37	10.0	0.72	7.0	0.99	7.0				7.0	6.4	0.6	6.4	5.2%	18	
CVS-17 (Inlet 2-11)	17	1.44	8.4	0.72	7.5	1.04	7.8				7.8	6.8	1.0	6.8	5.2%	18	
CVS-17A	17A	2.18	13.6	0.72	6.2	1.58	9.7										
CVS-18	18	2.69	10.0	0.70	7.0	1.88	13.2		12.1	1.88	-	-	-	-	-	-	
CVS-19	19	1.61	6.0	0.81	8.4	1.31	11.0		12.1	1.31	-	-	-	-	-	-	
CVS-20	20	1.80	10.4	0.72	6.9	1.30	9.0		12.1	1.30	-	-	-	-	-	-	
CVS-21	21	3.88	16.1	0.72	5.7	2.81	16.0		12.1	2.81	-	-	-	-	-	-	
CVS-22 (2-10A)	22	0.87	6.2	0.72	8.3	0.63	5.2				5.2	5.6	0.2	5.6	1.0%	18	Takes bypass flow from CVS-16
CVS-23 (Inlet 2-10)	23	0.87	5.5	0.82	8.6	0.71	6.1				6.1	7.1	0.5	6.1	1.0%	18	Takes bypass flow from CVS-17
BEL-1 (Inlet 2-1)	B1	3.73	12.8	0.62	6.3	2.31	14.7				14.7	8.3	6.4	63.6	3.3%	36	Bypass flow goes to BEL-3.
BEL-2 (Inlet 1-1)	B2	1.38	7.6	0.83	7.8	1.15	8.9				8.9	6.5	2.4	69.5	0.9%	36	Bypass flow goes to BEL-4.
BEL-3 (Inlet 2-2)	B3	6.76	14.4	0.56	6.0	3.76	22.6				29.0	29.0	0.0	95.6	3.2%	36	Takes bypass from BEL-1.
BEL-4 (Inlet 1-2)	B4	1.75	7.9	0.84	7.7	1.46	11.2				13.6	13.6	0.0	110.8	2.9%	36	Takes bypass from BEL-2.
BEL-5	B5	4.55	11.0	0.83	6.8	3.76	25.5		12.1	3.76	-	-	-	-	-	-	
BEL-6	B6	3.95	7.4	0.80	7.9	3.17	24.9		12.1	3.17	-	-	-	-	-	-	


APPENDIX C

Hydraulic Analysis

- Inlet Capacity Calculations
- StormCAD Storm Sewer Design
 - 2-Year Storm Table and Profiles
 - 5-Year Storm Table and Profiles
 - 100-Year Storm Table and Profiles
- Swale Calculations
- Water Quality Structure Cut Sheets & Calculations

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 1-1

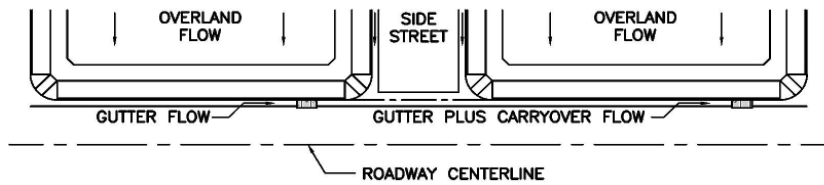

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
4.1	8.9

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
4.1	8.9

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 1-1



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.019$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm
$Q_{allow} =$	23.4	207.0


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 1-1



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	3.98	6.47	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.1	2.4	cfs
Capture Percentage = Q_a/Q_o =	C% =	97	73	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 1-2

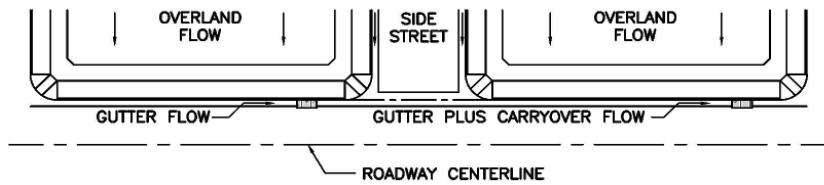

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
5.2	11.2

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	2.4

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
5.2	13.6

 cfs

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:
Inlet ID:

COMPARK SOUTH
INLET 1-2



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

 ft

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

 inches

Allow Flow Depth at Street Crown (leave blank for no)



check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm
	SUMP	SUMP

 cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 1-2



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	3.00	3.00	inches
N_o =	2	2	
Ponding Depth =	6.0	10.4	inches
	MINOR	MAJOR	☐ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	10.5	23.8	cfs
$Q_{PEAK REQUIRED}$ =	5.2	13.6	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 1-3

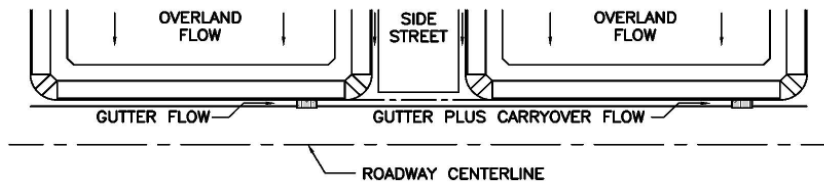

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
5.5	20.2

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
5.5	20.2

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 1-3



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.019$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

 ft

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

 inches

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm
$Q_{allow} =$	23.4	207.0

 cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 1-3



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'		MINOR	MAJOR	
Total Inlet Interception Capacity	Q =	5.50	13.47	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	6.7	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	67	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 1-4

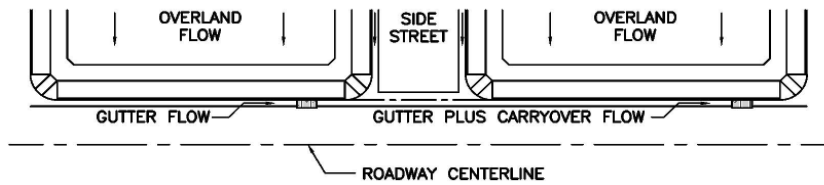

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
2.4	5.9

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	6.7

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
2.4	12.6

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 1-4



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.019$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm
$Q_{allow} =$	23.4	207.0


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 1-4



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_F-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_F-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	2.40	7.70	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	4.9	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	61	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 1-5

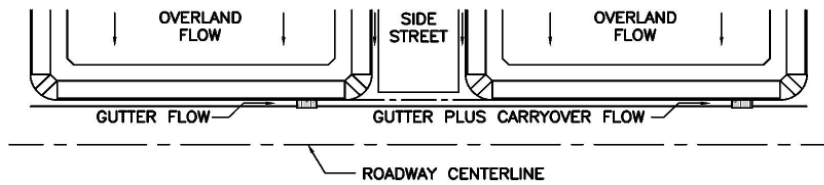

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
5.1	11.0

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	4.1

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
5.1	15.1

 cfs

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:
Inlet ID:

COMPARK SOUTH
INLET 1-5



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm
	SUMP	SUMP

 cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 1-5



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	3.00	3.00	inches
N_o =	2	2	
Ponding Depth =	6.0	10.4	inches
	MINOR	MAJOR	☐ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	10.5	23.8	cfs
$Q_{PEAK REQUIRED}$ =	5.1	15.1	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 1-6

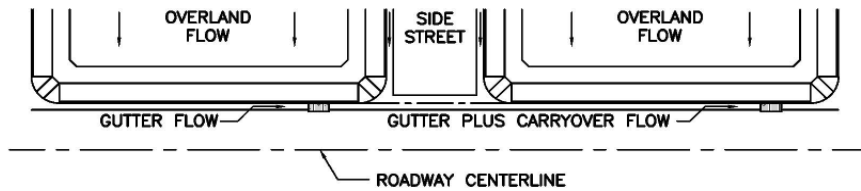

Show Details

Design Flow: ONLY if already determined through other methods: (local peak flow for 1/2 of street OR grass-lined channel):		Minor Storm	Major Storm	
*If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.		*Q _{Known} = 3.0	6.5	cfs
Geographic Information: (Enter data in the blue cells):				
Site Type: ☐ Site is Urban ☐ Site is Non-Urban	Flows Developed For: ☐ Street Inlets ☐ Area Inlets in a Median	Subcatchment Area = Acres Percent Imperviousness = % NRCS Soil Type = A, B, C, or D	Slope (ft/ft) Length (ft) Overland Flow = Channel Flow =	
Rainfall Information: Intensity I (in/hr) = $C_1 \cdot P_1 / (C_2 + T_c) \wedge C_3$				
Design Storm Return Period, T_r = years Return Period One-Hour Precipitation, P_1 = inches		Minor Storm	Major Storm	
C_1 = C_2 = C_3 =				
User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C = User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =				
Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =		0.0	4.9	cfs
Total Design Peak Flow, Q =		3.0	11.4	cfs

<---
FILL IN THIS SECTION
OR...
FILL IN THE SECTIONS
BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 1-6



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	20.0	37.0	ft

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm	
$d_{MAX} =$	6.0	12.0	inches

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm	
$Q_{allow} =$	16.8	171.1	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 1-6



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_F-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_F-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	3.00	7.28	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	4.1	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	64	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-1

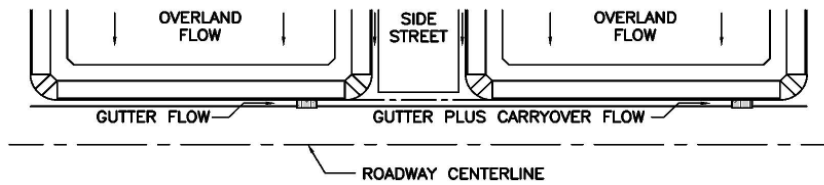

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
4.0	14.7

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
4.0	14.7

 cfs

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:
Inlet ID:

COMPARK SOUTH
INLET 2-1



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.019$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

 ft

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

 inches

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm
$Q_{allow} =$	23.4	207.0

 cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 2-1



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_F-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_F-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	3.90	8.29	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.1	6.4	cfs
Capture Percentage = Q_a/Q_o =	C% =	98	56	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-2

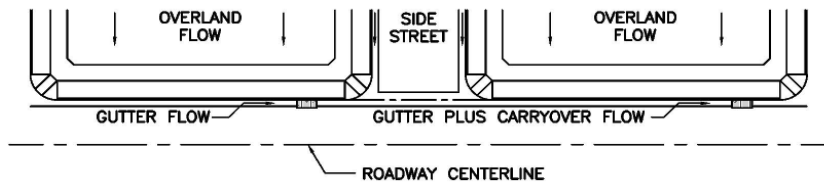

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
4.2	22.6

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.1	6.4

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
4.3	29.0

 cfs

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:
Inlet ID:

COMPARK SOUTH
INLET 2-2



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm
	SUMP	SUMP

 cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 2-2



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	3.00	3.00	inches
N_o =	3	3	
Ponding Depth =	6.0	10.4	inches
	MINOR	MAJOR	☐ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	13.5	36.4	cfs
$Q_{PEAK REQUIRED}$ =	4.3	29.0	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-3

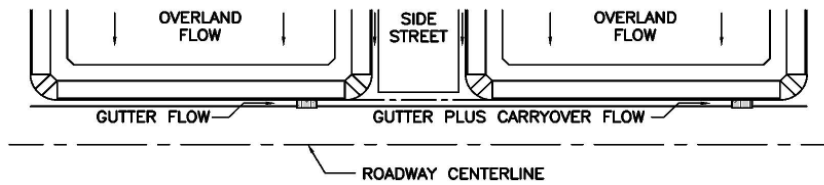

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
4.5	9.9

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
4.5	9.9

 cfs

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:
Inlet ID:

COMPARK SOUTH
INLET 2-3



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 17.5$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.015$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm
$T_{MAX} =$	20.0	37.0

 ft

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm
$d_{MAX} =$	6.0	12.0

 inches

Allow Flow Depth at Street Crown (leave blank for no)



check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm
$Q_{allow} =$	20.8	225.6

 cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 2-3



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	4.50	8.95	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	1.0	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	90	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-4

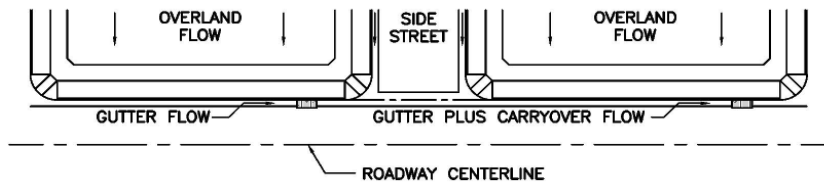

Show Details

Design Flow: ONLY if already determined through other methods: (local peak flow for 1/2 of street OR grass-lined channel):		Minor Storm *Q _{known} = <u>2.6</u> cfs	Major Storm <u>7.5</u> cfs
* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.			
Geographic Information: (Enter data in the blue cells):			
Subcatchment Area = <u> </u> Acres Percent Imperviousness = <u> </u> % NRCS Soil Type = <u> </u> A, B, C, or D	Slope (ft/ft) Length (ft) Overland Flow = <u> </u> <u> </u> Channel Flow = <u> </u> <u> </u>		
Site Type: ☐ Site is Urban ☐ Site is Non-Urban	Flows Developed For: ☐ Street Inlets ☐ Area Inlets in a Median		
Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$			
Design Storm Return Period, T_r = <u> </u> years Return Period One-Hour Precipitation, P_1 = <u> </u> inches C_1 = <u> </u> C_2 = <u> </u> C_3 = <u> </u>		Minor Storm <u> </u>	Major Storm <u> </u>
User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C = <u> </u> User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 = <u> </u>			
Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b = <u>0.0</u> cfs			
Total Design Peak Flow, Q = <u>2.6</u> cfs			

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:
Inlet ID:

COMPARK SOUTH
INLET 2-4



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

Height of Curb at Gutter Flow Line

Distance from Curb Face to Street Crown

Gutter Width

Street Transverse Slope

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

Street Longitudinal Slope - Enter 0 for sump condition

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$T_{BACK} = 5.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.013$

$H_{CURB} = 6.00$ inches
 $T_{CROWN} = 37.0$ ft
 $W = 2.00$ ft
 $S_x = 0.020$ ft/ft
 $S_w = 0.083$ ft/ft
 $S_o = 0.015$ ft/ft
 $n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

	Minor Storm	Major Storm	
$T_{MAX} =$	20.0	37.0	ft
$d_{MAX} =$	6.0	12.0	inches
	☐	☒	check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

20.8	204.4
------	-------

 cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 2-4



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_F-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_F-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'		MINOR	MAJOR	
Total Inlet Interception Capacity	Q =	2.60	8.05	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	0.5	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	95	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: **COMPARK SOUTH**
Inlet ID: **INLET 2-5**

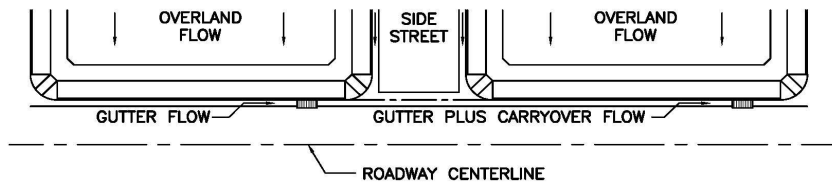

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
7.9	21.7

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	1.9

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
7.9	23.6

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 2-5

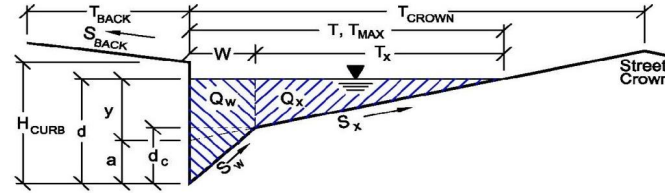

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	20.0	37.0	ft
$d_{MAX} =$	6.0	10.2	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	SUMP	SUMP	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 2-5



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	3.00	3.00	inches
N_o =	2	2	
Ponding Depth =	5.6	12.0	inches
	MINOR	MAJOR	☒ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	8.7	25.5	cfs
$Q_{PEAK REQUIRED}$ =	7.9	23.6	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-6

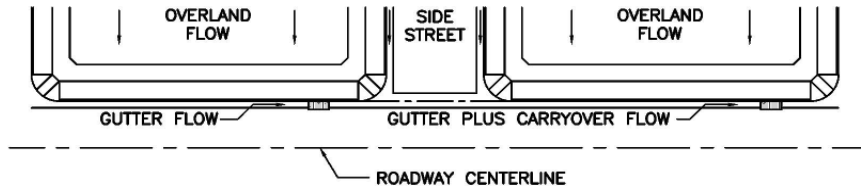

Show Details

Design Flow: ONLY if already determined through other methods: (local peak flow for 1/2 of street OR grass-lined channel):		Minor Storm	Major Storm	
*If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.		*Q _{Known} = 3.0	8.1	cfs
Geographic Information: (Enter data in the blue cells):				
Site Type: ☐ Site is Urban ☐ Site is Non-Urban	Flows Developed For: ☐ Street Inlets ☐ Area Inlets in a Median	Subcatchment Area = Acres Percent Imperviousness = % NRCS Soil Type = A, B, C, or D	Slope (ft/ft) Length (ft) Overland Flow = Channel Flow =	
Rainfall Information: Intensity I (in/hr) = $C_1 \cdot P_1 / (C_2 + T_c) \wedge C_3$				
Design Storm Return Period, T_r = years Return Period One-Hour Precipitation, P_1 = inches		Minor Storm	Major Storm	
C_1 = C_2 = C_3 =				
User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C = User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =				
Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =		0.0	0.5	cfs
Total Design Peak Flow, Q =		3.0	8.6	cfs

<---
FILL IN THIS SECTION
OR...
FILL IN THE SECTIONS
BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 2-6



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 5.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.013$

Height of Curb at Gutter Flow Line

$H_{CURB} = 6.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 37.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.005$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	20.0	37.0	ft
$d_{MAX} =$	6.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

$d_{MAX} = 6.0$ inches

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	12.0	118.0	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 2-6



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_0 =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_0 =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_F-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_F-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	3.00	8.06	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	0.5	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	94	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: **COMPARK SOUTH**
Inlet ID: **INLET 3-4**

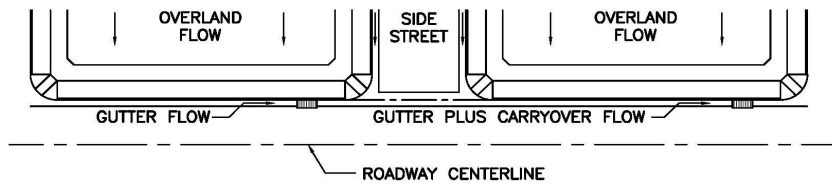

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
3.9	10.7

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.5

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
3.9	11.2

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 3-4



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	SUMP	SUMP	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 3-4



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	5.00	5.00	inches
N_o =	3	3	
Ponding Depth =	4.0	12.0	inches
	MINOR	MAJOR	☒ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	3.9	42.1	cfs
$Q_{PEAK REQUIRED}$ =	3.9	11.2	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 3-5

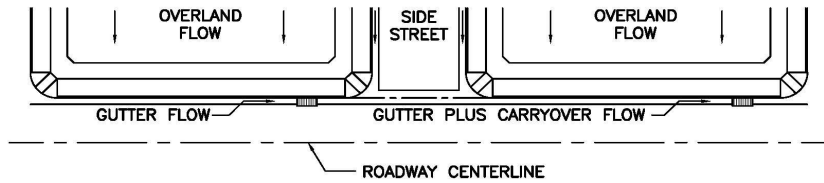

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
3.9	11.0

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
3.9	11.0

 cfs

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **COMPARK SOUTH**

Inlet ID: **INLET 3-5**

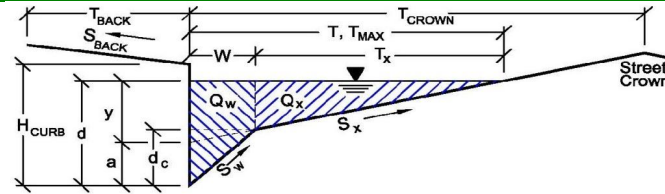

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

$d_{MAX} = 4.0$ inches

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☐ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	SUMP	SUMP	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 3-5



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	5.00	5.00	inches
N_o =	3	3	
Ponding Depth =	4.0	12.0	inches
	MINOR	MAJOR	☒ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	3.9	42.1	cfs
$Q_{PEAK REQUIRED}$ =	3.9	11.0	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 4-4

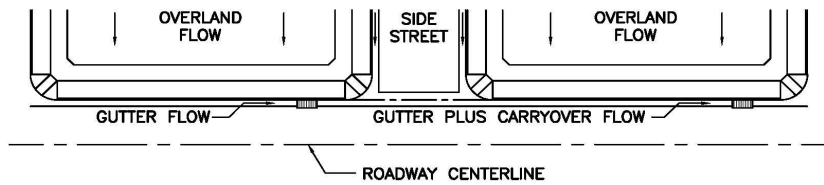

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
0.9	2.4

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

4

	Minor Storm	Major Storm	
Design Storm Return Period, T_r =			years
Return Period One-Hour Precipitation, P_1 =			inches
C_1 =			
C_2 =			
C_3 =			
User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =			
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =			
Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =	0.0	0.0	cfs
Total Design Peak Flow, Q =	0.9	2.4	cfs

<---
FILL IN THIS SECTION
OR...


FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **COMPARK SOUTH**

Inlet ID: **INLET 4-4**

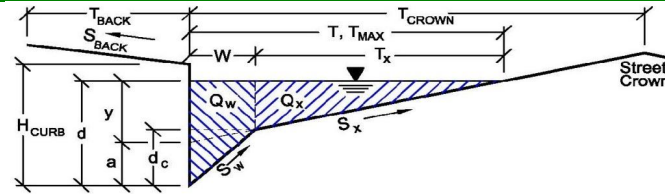

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	SUMP	SUMP	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 4-4



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	5.00	5.00	inches
No =	1	1	
Ponding Depth =	4.0	12.0	inches
	MINOR	MAJOR	☒ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	1.9	13.2	cfs
$Q_{PEAK REQUIRED}$ =	0.9	2.4	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 4-5

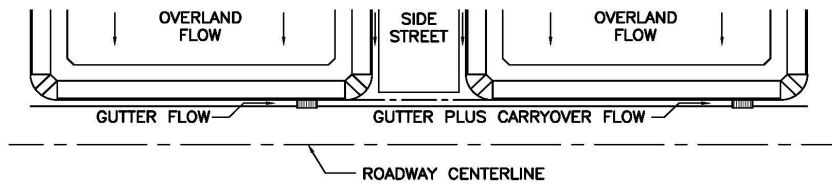

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
2.4	6.6

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	2.3

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
2.4	8.9

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 4-5

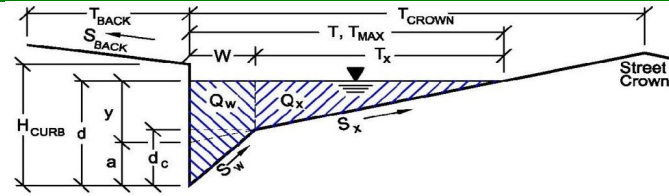

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)



check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	SUMP	SUMP	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 4-5



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	5.00	5.00	inches
No =	2	2	
Ponding Depth =	4.0	12.0	inches
	MINOR	MAJOR	☒ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	3.1	27.5	cfs
$Q_{PEAK REQUIRED}$ =	2.4	8.9	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 4-5A

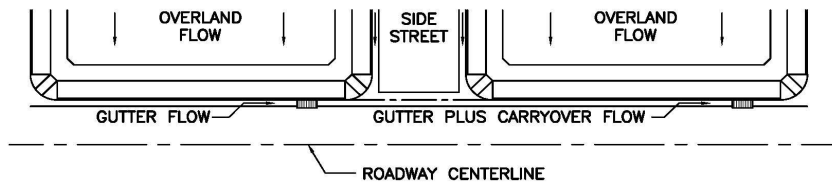

Show Details

Design Flow: ONLY if already determined through other methods: (local peak flow for 1/2 of street OR grass-lined channel):		Minor Storm *Q _{known} = <u>4.1</u>	Major Storm <u>11.4</u>	cfs
* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.				
Geographic Information: (Enter data in the blue cells):				
You cannot enter values for Q and use the Q calculator at the same time				
Site Type: ☐ Site is Urban ☐ Site is Non-Urban	Flows Developed For: ☒ Street Inlets ☐ Area Inlets in a Median	Subcatchment Area = <u> </u> Acres Percent Imperviousness = <u> </u> % NRCS Soil Type = <u> </u> A, B, C, or D		
		Slope (ft/ft) Length (ft) Overland Flow = <u> </u> <u> </u> Gutter Flow = <u> </u> <u> </u>		
Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$				
		Design Storm Return Period, T _r = <u> </u> years Return Period One-Hour Precipitation, P ₁ = <u> </u> inches C ₁ = <u> </u> C ₂ = <u> </u> C ₃ = <u> </u>		
User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C = <u> </u> User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C ₅ = <u> </u>				
Bypass (Carry-Over) Flow from upstream Subcatchments, Q _b = <u> </u>		Minor Storm <u>0.0</u>	Major Storm <u>0.2</u>	cfs
Total Design Peak Flow, Q = <u> </u>		<u>4.1</u>	<u>11.6</u>	cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 4-5A

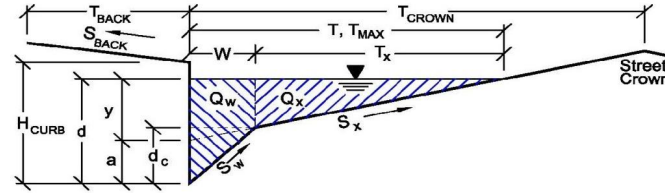

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.3	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm	
$Q_{allow} =$	4.4	91.2	cfs


MAJOR STORM Allowable Capacity is based on Depth Criterion

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 4-5A



Design Information (Input)		MINOR	MAJOR
Type of Inlet	Type =	CDOT Type R Curb Opening	
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0 inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00 ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'		MINOR	MAJOR
Total Inlet Interception Capacity	Q =	4.10	10.24 cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	1.4 cfs
Capture Percentage = Q_d/Q_o =	C% =	100	88 %

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 4-5B

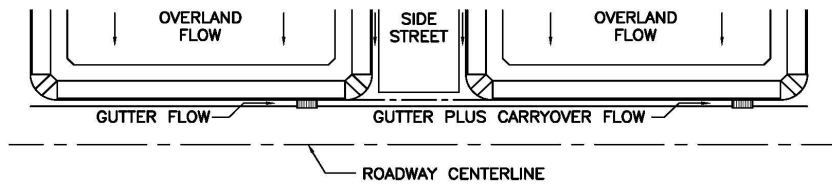

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
3.4	8.5

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.9

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
3.4	9.4

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 4-5B



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☒ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm	
$Q_{allow} =$	3.4	91.2	cfs


MAJOR STORM Allowable Capacity is based on Depth Criterion

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 4-5B



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	N_o =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - $Q <$ maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	3.40	6.90	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	2.4	cfs
Capture Percentage = Q_d/Q_o =	$C\%$ =	100	74	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 4-5C

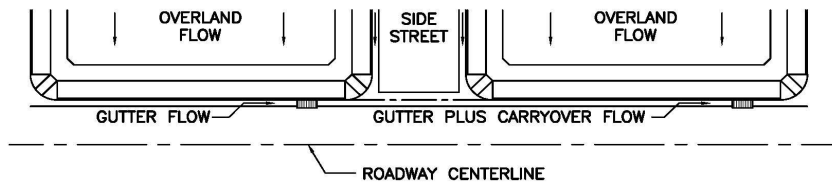

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
2.4	6.7

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	1.2

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
2.4	7.9

 cfs


<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **COMPARK SOUTH**
Inlet ID: **INLET 4-5C**

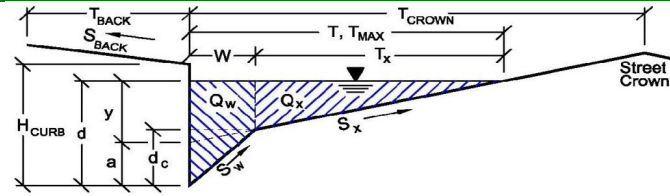

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
Manning's Roughness Behind Curb (typically between 0.012 and 0.020)
Height of Curb at Gutter Flow Line
Distance from Curb Face to Street Crown
Gutter Width
Street Transverse Slope
Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
Street Longitudinal Slope - Enter 0 for sump condition
Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$T_{BACK} = 0.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.020$
 $H_{CURB} = 4.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_x = 0.020$ ft/ft
 $S_w = 0.083$ ft/ft
 $S_o = 0.010$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
Allow Flow Depth at Street Crown (leave blank for no)

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches
	☐	☒	check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$


Minor Storm	Major Storm
3.4	91.2

 cfs

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'
Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
 Inlet ID: INLET 4-5C



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	5.0	5.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	2.40	6.85	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	1.1	cfs
Capture Percentage = Q_d/Q_o =	C% =	100	87	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 5-4

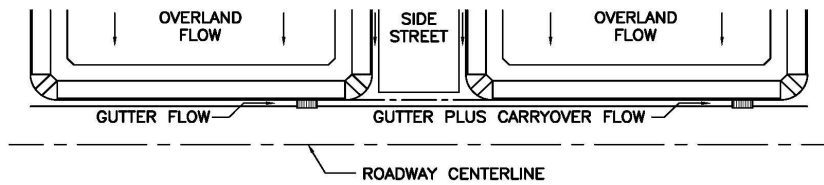

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
3.4	10.8

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
3.4	10.8

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 5-4



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	3.4	91.4	cfs

MAJOR STORM Allowable Capacity is based on Depth Criterion


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 5-4



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	3.40	9.77	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	1.0	cfs
Capture Percentage = Q_d/Q_o =	C% =	100	90	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: **COMPARK SOUTH**
Inlet ID: **INLET 5-4A**

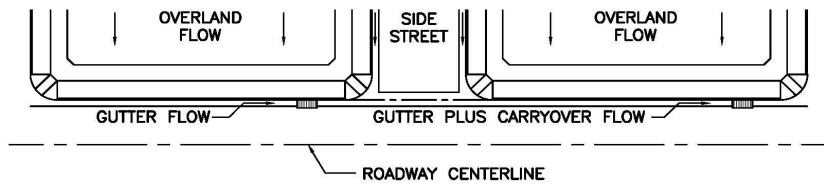

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
1.0	2.6

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 \cdot P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
1.0	2.6

 cfs


<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **COMPARK SOUTH**
Inlet ID: **INLET 5-4A**



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
Manning's Roughness Behind Curb (typically between 0.012 and 0.020)
Height of Curb at Gutter Flow Line
Distance from Curb Face to Street Crown
Gutter Width
Street Transverse Slope
Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
Street Longitudinal Slope - Enter 0 for sump condition
Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$T_{BACK} = 0.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.020$
 $H_{CURB} = 4.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_x = 0.020$ ft/ft
 $S_w = 0.083$ ft/ft
 $S_o = 0.010$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
Allow Flow Depth at Street Crown (leave blank for no)

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches
	☐	☒	check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$


Minor Storm	Major Storm	
3.4	91.2	cfs

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 5-4A



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	5.0	5.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	1	1	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	1.00	2.22	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	0.4	cfs
Capture Percentage = Q_d/Q_o =	C% =	100	85	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: **COMPARK SOUTH**
Inlet ID: **INLET 5-5**

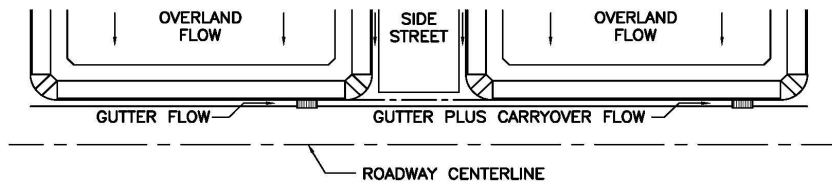

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
3.3	9.0

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	6.4

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
3.3	15.4

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 5-5



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	SUMP	SUMP	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 5-5



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	5.00	5.00	inches
N_o =	2	2	
Ponding Depth =	4.1	12.0	inches
	MINOR	MAJOR	☒ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	3.4	27.5	cfs
$Q_{PEAK REQUIRED}$ =	3.3	15.4	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 5-5A

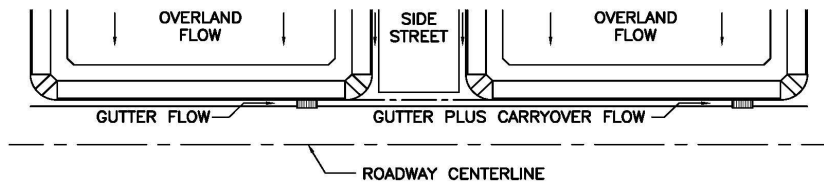

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
4.2	12.1

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.2

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
4.2	12.3

 cfs


<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **COMPARK SOUTH**
Inlet ID: **INLET 5-5A**



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
Manning's Roughness Behind Curb (typically between 0.012 and 0.020)
Height of Curb at Gutter Flow Line
Distance from Curb Face to Street Crown
Gutter Width
Street Transverse Slope
Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
Street Longitudinal Slope - Enter 0 for sump condition
Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$T_{BACK} = 0.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.020$
 $H_{CURB} = 4.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_x = 0.020$ ft/ft
 $S_w = 0.083$ ft/ft
 $S_o = 0.010$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
Allow Flow Depth at Street Crown (leave blank for no)

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.3	12.0	inches
	☐	☒	check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion
MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$


Minor Storm	Major Storm
4.4	91.2

 cfs

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'
Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 5-5A



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	3.0	3.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	3	3	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	4.20	10.62	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	1.7	cfs
Capture Percentage = Q_d/Q_o =	C% =	100	86	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: **COMPARK SOUTH**
Inlet ID: **INLET 5-5B**

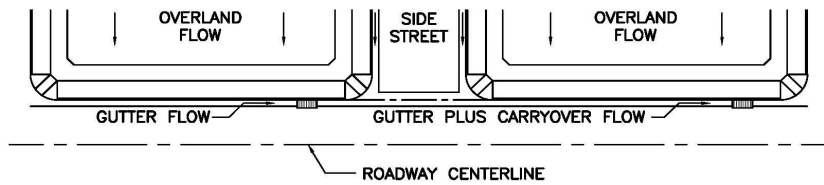

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
3.4	9.3

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 \cdot P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
3.4	9.3

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 5-5B

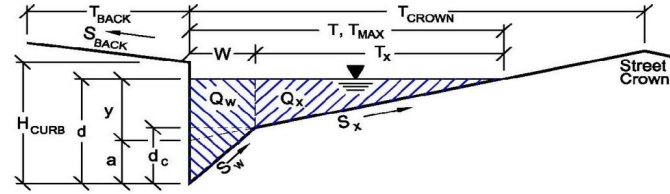

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.01$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	3.4	91.2	cfs


MAJOR STORM Allowable Capacity is based on Depth Criterion

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
 Inlet ID: INLET 5-5B



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	5.0	5.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	3.40	7.54	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	1.8	cfs
Capture Percentage = Q_d/Q_o =	C% =	100	81	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 6-4

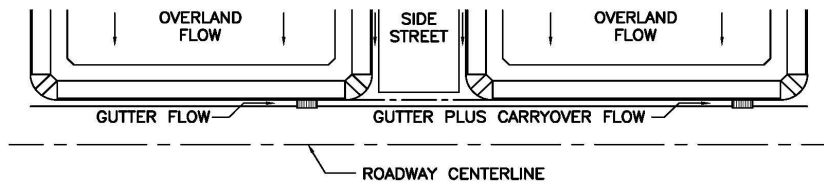

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
1.1	3.5

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
1.1	3.5

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 6-4

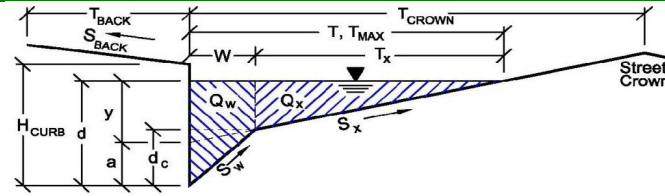

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.006$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm	
$Q_{allow} =$	2.6	70.6	cfs

MAJOR STORM Allowable Capacity is based on Depth Criterion


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH


Inlet ID: INLET 6-4



Design Information (Input)		MINOR		MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening			
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a _{LOCAL} =	3.0	3.0	inches	
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2		
Length of a Single Unit Inlet (Grate or Curb Opening)	L _o =	5.00	5.00	ft	
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W _o =	N/A	N/A	ft	
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C _{r-G} =	N/A	N/A		
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C _{r-C} =	0.10	0.10		
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'					
Total Inlet Interception Capacity	Q =	1.10	3.50	cfs	
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q _b =	0.0	0.0	cfs	
Capture Percentage = Q _a /Q _o =	C% =	100	100	%	

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 6-5

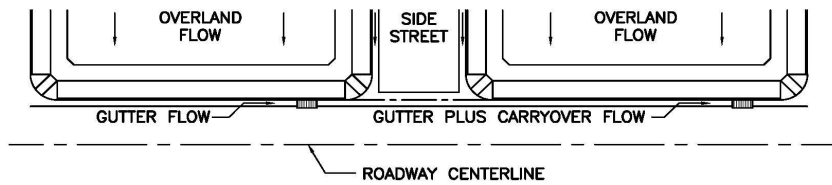

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
3.9	17.6

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.9

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
3.9	18.5

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 6-5

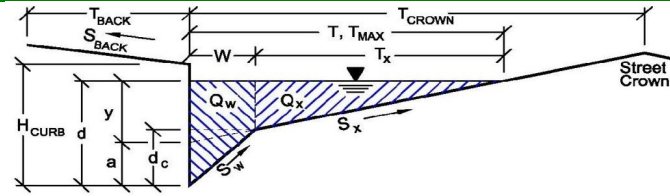

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.000$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.013$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	SUMP	SUMP	cfs


Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET IN A SUMP OR SAG LOCATION

Project = COMPARK SOUTH

Inlet ID = INLET 6-5



Design Information (Input)

Type of Inlet

Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')

Number of Unit Inlets (Grate or Curb Opening)

Water Depth at Flowline (outside of local depression)

Grate Information

Length of a Unit Grate

Width of a Unit Grate

Area Opening Ratio for a Grate (typical values 0.15-0.90)

Clogging Factor for a Single Grate (typical value 0.50 - 0.70)

Grate Weir Coefficient (typical value 2.15 - 3.60)

Grate Orifice Coefficient (typical value 0.60 - 0.80)

Curb Opening Information

Length of a Unit Curb Opening

Height of Vertical Curb Opening in Inches

Height of Curb Orifice Throat in Inches

Angle of Throat (see USDCM Figure ST-5)

Side Width for Depression Pan (typically the gutter width of 2 feet)

Clogging Factor for a Single Curb Opening (typical value 0.10)

Curb Opening Weir Coefficient (typical value 2.3-3.7)

Curb Opening Orifice Coefficient (typical value 0.60 - 0.70)


Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (>Q PEAK)

	MINOR	MAJOR	
Inlet Type =	CDOT Type R Curb Opening		
a_{local} =	5.00	5.00	inches
N_o =	3	3	
Ponding Depth =	4.0	12.0	inches
	MINOR	MAJOR	☒ Override Depths
$L_o (G)$ =	N/A	N/A	feet
W_o =	N/A	N/A	feet
A_{ratio} =	N/A	N/A	
$C_r (G)$ =	N/A	N/A	
$C_w (G)$ =	N/A	N/A	
$C_o (G)$ =	N/A	N/A	
	MINOR	MAJOR	
$L_o (C)$ =	5.00	5.00	feet
H_{vert} =	6.00	6.00	inches
H_{throat} =	6.00	6.00	inches
Theta =	63.40	63.40	degrees
W_p =	2.00	2.00	feet
$C_r (C)$ =	0.10	0.10	
$C_w (C)$ =	3.60	3.60	
$C_o (C)$ =	0.67	0.67	
	MINOR	MAJOR	
Q_a =	3.9	42.1	cfs
$Q_{PEAK REQUIRED}$ =	3.9	18.5	cfs

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 6-5A

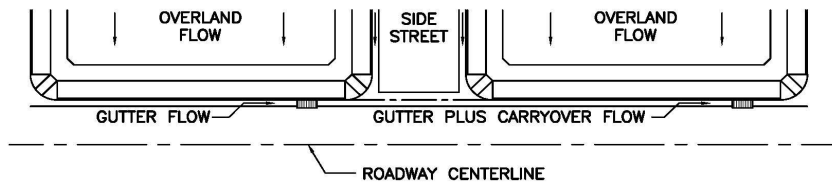


Show Details

Design Flow: ONLY if already determined through other methods: (local peak flow for 1/2 of street OR grass-lined channel):		Minor Storm *Q _{known} = <u>2.6</u> cfs	Major Storm <u>6.7</u> cfs	<--- FILL IN THIS SECTION OR... FILL IN THE SECTIONS BELOW. <---
* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.				
Geographic Information: (Enter data in the blue cells):				
Site Type: ☐ Site is Urban ☐ Site is Non-Urban	Flows Developed For: ☐ Street Inlets ☐ Area Inlets in a Median	Subcatchment Area = <u> </u> Acres Percent Imperviousness = <u> </u> % NRCS Soil Type = <u> </u> A, B, C, or D		
		Slope (ft/ft) Length (ft) Overland Flow = <u> </u> <u> </u> Channel Flow = <u> </u> <u> </u>		
Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$				
		Design Storm Return Period, T _r = <u> </u> years Return Period One-Hour Precipitation, P ₁ = <u> </u> inches C ₁ = <u> </u> C ₂ = <u> </u> C ₃ = <u> </u>		
User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C = <u> </u> User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C ₅ = <u> </u>				
Bypass (Carry-Over) Flow from upstream Subcatchments, Q _b = <u>0.0</u> cfs				
Total Design Peak Flow, Q = <u>2.6</u> cfs				

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **COMPARK SOUTH**
Inlet ID: **INLET 6-5A**



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
Manning's Roughness Behind Curb (typically between 0.012 and 0.020)
Height of Curb at Gutter Flow Line
Distance from Curb Face to Street Crown
Gutter Width
Street Transverse Slope
Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
Street Longitudinal Slope - Enter 0 for sump condition
Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$T_{BACK} = 0.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.020$
 $H_{CURB} = 4.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_x = 0.020$ ft/ft
 $S_w = 0.083$ ft/ft
 $S_o = 0.038$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
Allow Flow Depth at Street Crown (leave blank for no)

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches
	☐	☒	check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$


Minor Storm	Major Storm	
6.6	88.7	cfs

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 6-5A



Design Information (Input)		MINOR		MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening			
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a _{LOCAL} =	5.0	5.0	inches	
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2		
Length of a Single Unit Inlet (Grate or Curb Opening)	L _o =	5.00	5.00	ft	
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W _o =	N/A	N/A	ft	
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C _r -G =	N/A	N/A		
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C _r -C =	0.10	0.10		
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'					
Total Inlet Interception Capacity	Q =	2.60	6.24	cfs	
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q _b =	0.0	0.5	cfs	
Capture Percentage = Q _a /Q _o =	C% =	100	93	%	

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: **COMPARK SOUTH**
Inlet ID: **INLET 6-5B**

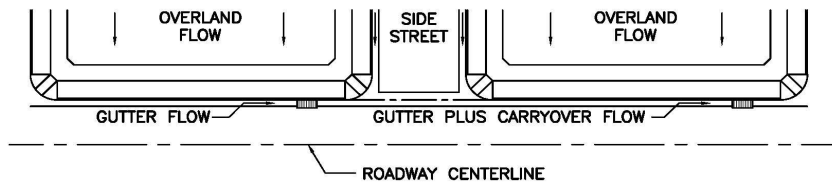

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
2.0	5.4

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =

User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
2.0	5.4

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 6-5B



Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.020$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.038$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

$d_{MAX} = 4.0$ inches

Allow Flow Depth at Street Crown (leave blank for no)

☐
☒

check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm	
$Q_{allow} =$	6.6	88.7	cfs


MAJOR STORM Allowable Capacity is based on Depth Criterion

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 6-5B



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	5.0	5.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	2.00	5.30	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	0.1	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	98	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 7-5

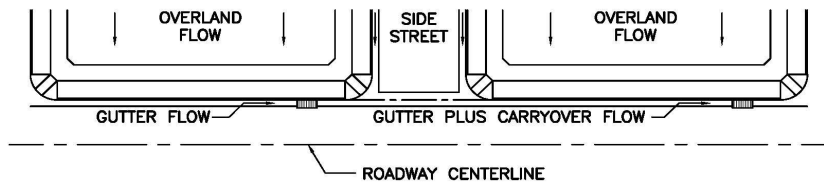

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
0.2	10.2

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + I_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
0.2	10.2

 cfs


<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

AREA INLET IN A TRAPEZOIDAL GRASS-LINED CHANNEL

COMPARK SOUTH

INLET 7-5



Grass Type	Limiting Manning's n
A	0.06
B	0.04
C	0.033
D	0.03
E	0.024

Analysis of Trapezoidal Grass-Lined Channel Using SCS Method

NRCS Vegetal Retardance (A, B, C, D, or E)

Manning's n (Leave cell D16 blank to manually enter an n value)

Channel Invert Slope

Bottom Width

Left Side Slope

Right Side Slope

Check one of the following soil types:

Soil Type:	Max. Velocity (V_{MAX})	Max Froude No. (F_{MAX})
Sandy	5.0 fps	0.50
Non-Sandy	7.0 fps	0.80

A, B, C, D or E

n =	0.030
S_o =	0.0100 ft/ft
B =	2.00 ft
Z1 =	5.00 ft/ft
Z2 =	5.00 ft/ft

Choose One:

- ☐ Sandy
☒ Non-Sandy

Max. Allowable Top Width of Channel for Minor & Major Storm

Max. Allowable Water Depth in Channel for Minor & Major Storm

	Minor Storm	Major Storm	
T_{MAX} =	12.00	12.00	feet
d_{MAX} =	1.00	1.00	feet

Allowable Channel Capacity Based On Channel Geometry

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Depth Criterion

	Minor Storm	Major Storm	
Q_{allow} =	24.01	24.01	cfs
d_{allow} =	1.00	1.00	ft

Water Depth in Channel Based On Design Peak Flow

Design Peak Flow

Water Depth

Q_o =	0.20	10.20	cfs
d =	0.09	0.68	feet

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

AREA INLET IN A TRAPEZOIDAL GRASS-LINED CHANNEL

COMPARK SOUTH

INLET 7-5

Inlet Design Information (Input)

Type of Inlet

Inlet Type = CDOT Type C

Angle of Inclined Grate (must be ≤ 30 degrees)

Width of Grate

Length of Grate

Open Area Ratio


Height of Inclined Grate

Clogging Factor

Grate Discharge Coefficient

Orifice Coefficient

Weir Coefficient



$\theta =$	0.00	degrees
$W =$	3.00	feet
$L =$	3.00	feet
$A_{RATIO} =$	0.70	
$H_B =$	0.00	feet
$C_f =$	0.50	
$C_d =$	0.96	
$C_o =$	0.64	
$C_w =$	2.05	

Water Depth at Inlet (for depressed inlets, 1 foot is added for depression)

Total Inlet Interception Capacity (assumes clogged condition)

Inlet Capacity IS GOOD for Minor and Major Storms (> Q PEAK)


Bypassed Flow, $Q_b =$

Capture Percentage = $Q_a/Q_o = C\%$

	MINOR	MAJOR	
$d =$	0.09	0.68	
$Q_a =$	0.51	10.44	cfs
Bypassed Flow, $Q_b =$	0.00	0.00	cfs
Capture Percentage = $Q_a/Q_o = C\%$	100	100	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-10

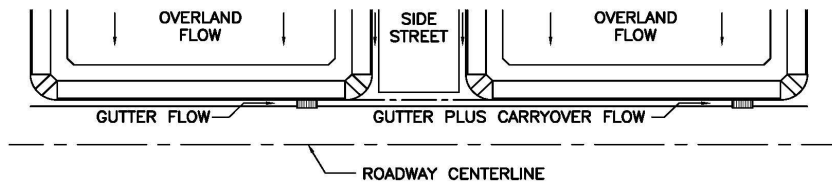

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
2.7	6.1

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =

User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.5

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
2.7	6.6

 cfs


<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)

(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project: **COMPARK SOUTH**
Inlet ID: **INLET 2-10**

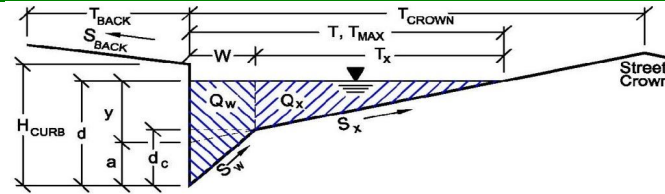

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb
Side Slope Behind Curb (leave blank for no conveyance credit behind curb)
Manning's Roughness Behind Curb (typically between 0.012 and 0.020)
Height of Curb at Gutter Flow Line
Distance from Curb Face to Street Crown
Gutter Width
Street Transverse Slope
Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)
Street Longitudinal Slope - Enter 0 for sump condition
Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$T_{BACK} = 0.0$ ft
 $S_{BACK} = 0.020$ ft/ft
 $n_{BACK} = 0.020$
 $H_{CURB} = 4.00$ inches
 $T_{CROWN} = 17.0$ ft
 $W = 2.00$ ft
 $S_x = 0.021$ ft/ft
 $S_w = 0.083$ ft/ft
 $S_o = 0.010$ ft/ft
 $n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm
Max. Allowable Depth at Gutter Flowline for Minor & Major Storm
Allow Flow Depth at Street Crown (leave blank for no)

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches
	☐	☐	check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Spread Criterion


$Q_{allow} =$

Minor Storm	Major Storm	
3.3	11.6	cfs

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'
Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 2-10



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	5.0	5.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	2.70	6.11	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	0.5	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	93	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-10A

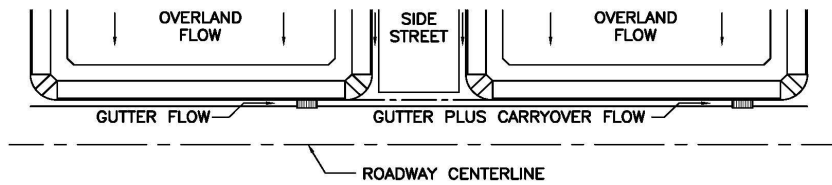

Show Details

Design Flow: ONLY if already determined through other methods: (local peak flow for 1/2 of street OR grass-lined channel):		Minor Storm *Q _{known} = <u>1.9</u> cfs	Major Storm <u>5.2</u> cfs
* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.			
Geographic Information: (Enter data in the blue cells):			
Site Type: ☐ Site is Urban ☐ Site is Non-Urban	Flows Developed For: ☐ Street Inlets ☐ Area Inlets in a Median	Subcatchment Area = <u> </u> Acres Percent Imperviousness = <u> </u> % NRCS Soil Type = <u> </u> A, B, C, or D	<--- FILL IN THIS SECTION OR... FILL IN THE SECTIONS BELOW. <---
		Slope (ft/ft) Length (ft) Overland Flow = <u> </u> <u> </u> Channel Flow = <u> </u> <u> </u>	
Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$			
		Design Storm Return Period, T _r = <u> </u> years	
		Return Period One-Hour Precipitation, P ₁ = <u> </u> inches	
		C ₁ = <u> </u>	
		C ₂ = <u> </u>	
		C ₃ = <u> </u>	
User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C = <u> </u>			
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C ₅ = <u> </u>			
Bypass (Carry-Over) Flow from upstream Subcatchments, Q _b = <u>0.0</u>		<u>0.3</u> cfs	
Total Design Peak Flow, Q = <u>1.9</u>		<u>5.5</u> cfs	

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 2-10A

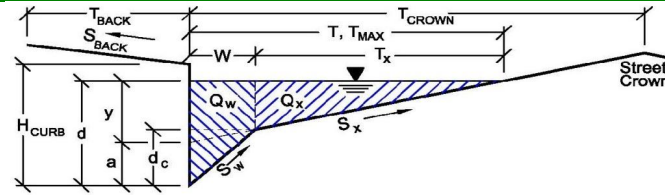

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.021$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

$d_{MAX} = 4.0$ inches

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☐ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Spread Criterion

$Q_{allow} =$


	Minor Storm	Major Storm	
	3.3	11.6	cfs

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 2-10A



Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	5.0	5.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	1.90	5.35	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	0.2	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	97	%

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-11

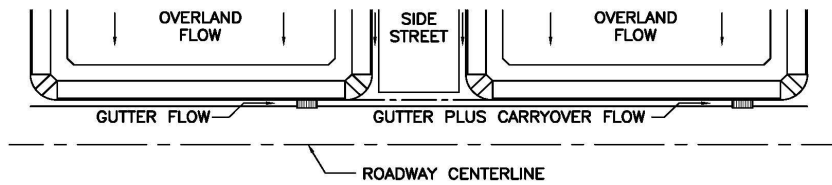

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
1.9	7.8

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =

User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
1.9	7.8

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 2-11

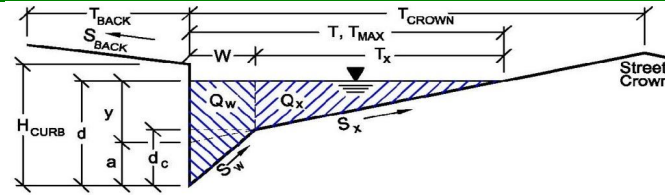

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.021$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

	Minor Storm	Major Storm	
$d_{MAX} =$	4.0	12.0	inches

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☐ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

MAJOR STORM Allowable Capacity is based on Spread Criterion


	Minor Storm	Major Storm	
$Q_{allow} =$	3.3	11.6	cfs

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

INLET ON A CONTINUOUS GRADE


Project: COMPARK SOUTH
Inlet ID: INLET 2-11



Design Information (Input)		MINOR		MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening			
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a _{LOCAL} =	5.0	5.0	inches	
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2		
Length of a Single Unit Inlet (Grate or Curb Opening)	L _o =	5.00	5.00	ft	
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W _o =	N/A	N/A	ft	
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C _r -G =	N/A	N/A		
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C _r -C =	0.10	0.10		
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'					
Total Inlet Interception Capacity	Q =	1.90	6.82	cfs	
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q _b =	0.0	1.0	cfs	
Capture Percentage = Q _a /Q _o =	C% =	100	87	%	

**DESIGN PEAK FLOW FOR ONE-HALF OF STREET
OR GRASS-LINED CHANNEL BY THE RATIONAL METHOD**

Project: COMPARK SOUTH
Inlet ID: INLET 2-11A

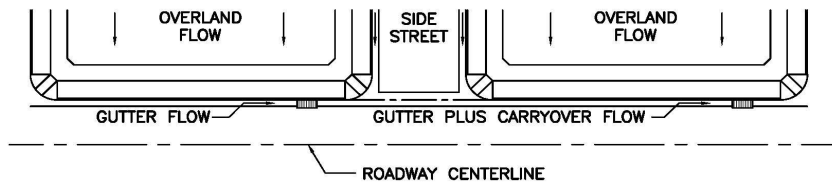

Show Details

Design Flow: ONLY if already determined through other methods:
(local peak flow for 1/2 of street OR grass-lined channel):

* Q_{known} =

Minor Storm	Major Storm
2.5	7.0

 cfs

* If you enter values in Row 14, skip the rest of this sheet and proceed to sheet Q-Allow or Area Inlet.

Geographic Information: (Enter data in the blue cells):

Site Type:
☐ Site is Urban
☐ Site is Non-Urban

Flows Developed For:
☐ Street Inlets
☐ Area Inlets in a Median

Subcatchment Area = Acres
Percent Imperviousness = %
NRCS Soil Type = A, B, C, or D

Slope (ft/ft) Length (ft)
Overland Flow =
Channel Flow =

Rainfall Information: Intensity I (inch/hr) = $C_1 * P_1 / (C_2 + T_c)^{C_3}$

Design Storm Return Period, T_r = years
Return Period One-Hour Precipitation, P_1 = inches
 C_1 =
 C_2 =
 C_3 =

User-Defined Storm Runoff Coefficient (leave this blank to accept a calculated value), C =
User-Defined 5-yr. Runoff Coefficient (leave this blank to accept a calculated value), C_5 =

Bypass (Carry-Over) Flow from upstream Subcatchments, Q_b =

Minor Storm	Major Storm
0.0	0.0

 cfs

Total Design Peak Flow, Q =

Minor Storm	Major Storm
2.5	7.0

 cfs

<---
FILL IN THIS SECTION
OR...

FILL IN THE
SECTIONS BELOW.
<---

ALLOWABLE CAPACITY FOR ONE-HALF OF STREET (Minor & Major Storm)


(Based on Regulated Criteria for Maximum Allowable Flow Depth and Spread)

Project:

COMPARK SOUTH

Inlet ID:

INLET 2-11A

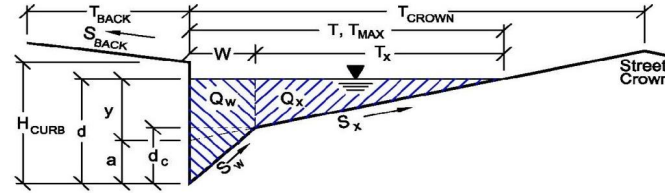

Gutter Geometry (Enter data in the blue cells)

Maximum Allowable Width for Spread Behind Curb

$T_{BACK} = 0.0$ ft

Side Slope Behind Curb (leave blank for no conveyance credit behind curb)

$S_{BACK} = 0.020$ ft/ft

Manning's Roughness Behind Curb (typically between 0.012 and 0.020)

$n_{BACK} = 0.020$

Height of Curb at Gutter Flow Line

$H_{CURB} = 4.00$ inches

Distance from Curb Face to Street Crown

$T_{CROWN} = 17.0$ ft

Gutter Width

$W = 2.00$ ft

Street Transverse Slope

$S_x = 0.021$ ft/ft

Gutter Cross Slope (typically 2 inches over 24 inches or 0.083 ft/ft)

$S_w = 0.083$ ft/ft

Street Longitudinal Slope - Enter 0 for sump condition

$S_o = 0.010$ ft/ft

Manning's Roughness for Street Section (typically between 0.012 and 0.020)

$n_{STREET} = 0.016$

Max. Allowable Spread for Minor & Major Storm

	Minor Storm	Major Storm	
$T_{MAX} =$	17.0	17.0	ft
$d_{MAX} =$	4.0	12.0	inches

Max. Allowable Depth at Gutter Flowline for Minor & Major Storm

Allow Flow Depth at Street Crown (leave blank for no)

☐ ☐ check = yes

MINOR STORM Allowable Capacity is based on Depth Criterion

$Q_{allow} =$

	Minor Storm	Major Storm	
	3.3	11.6	cfs


MAJOR STORM Allowable Capacity is based on Spread Criterion

Minor storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'

Major storm max. allowable capacity GOOD - greater than flow given on sheet 'Q-Peak'


INLET ON A CONTINUOUS GRADE

Project: COMPARK SOUTH
Inlet ID: INLET 2-11A




Design Information (Input)		MINOR	MAJOR	
Type of Inlet	Type =	CDOT Type R Curb Opening		
Local Depression (additional to continuous gutter depression 'a' from 'Q-Allow')	a_{LOCAL} =	5.0	5.0	inches
Total Number of Units in the Inlet (Grate or Curb Opening)	No =	2	2	
Length of a Single Unit Inlet (Grate or Curb Opening)	L_o =	5.00	5.00	ft
Width of a Unit Grate (cannot be greater than W from Q-Allow)	W_o =	N/A	N/A	ft
Clogging Factor for a Single Unit Grate (typical min. value = 0.5)	C_r-G =	N/A	N/A	
Clogging Factor for a Single Unit Curb Opening (typical min. value = 0.1)	C_r-C =	0.10	0.10	
Street Hydraulics: OK - Q < maximum allowable from sheet 'Q-Allow'				
Total Inlet Interception Capacity	Q =	2.50	6.36	cfs
Total Inlet Carry-Over Flow (flow bypassing inlet)	Q_b =	0.0	0.6	cfs
Capture Percentage = Q_a/Q_o =	C% =	100	91	%


Profile Report
Engineering Profile - Profile - Storm Line 4 (Compark Village South StormCAD [2 year].stsw)

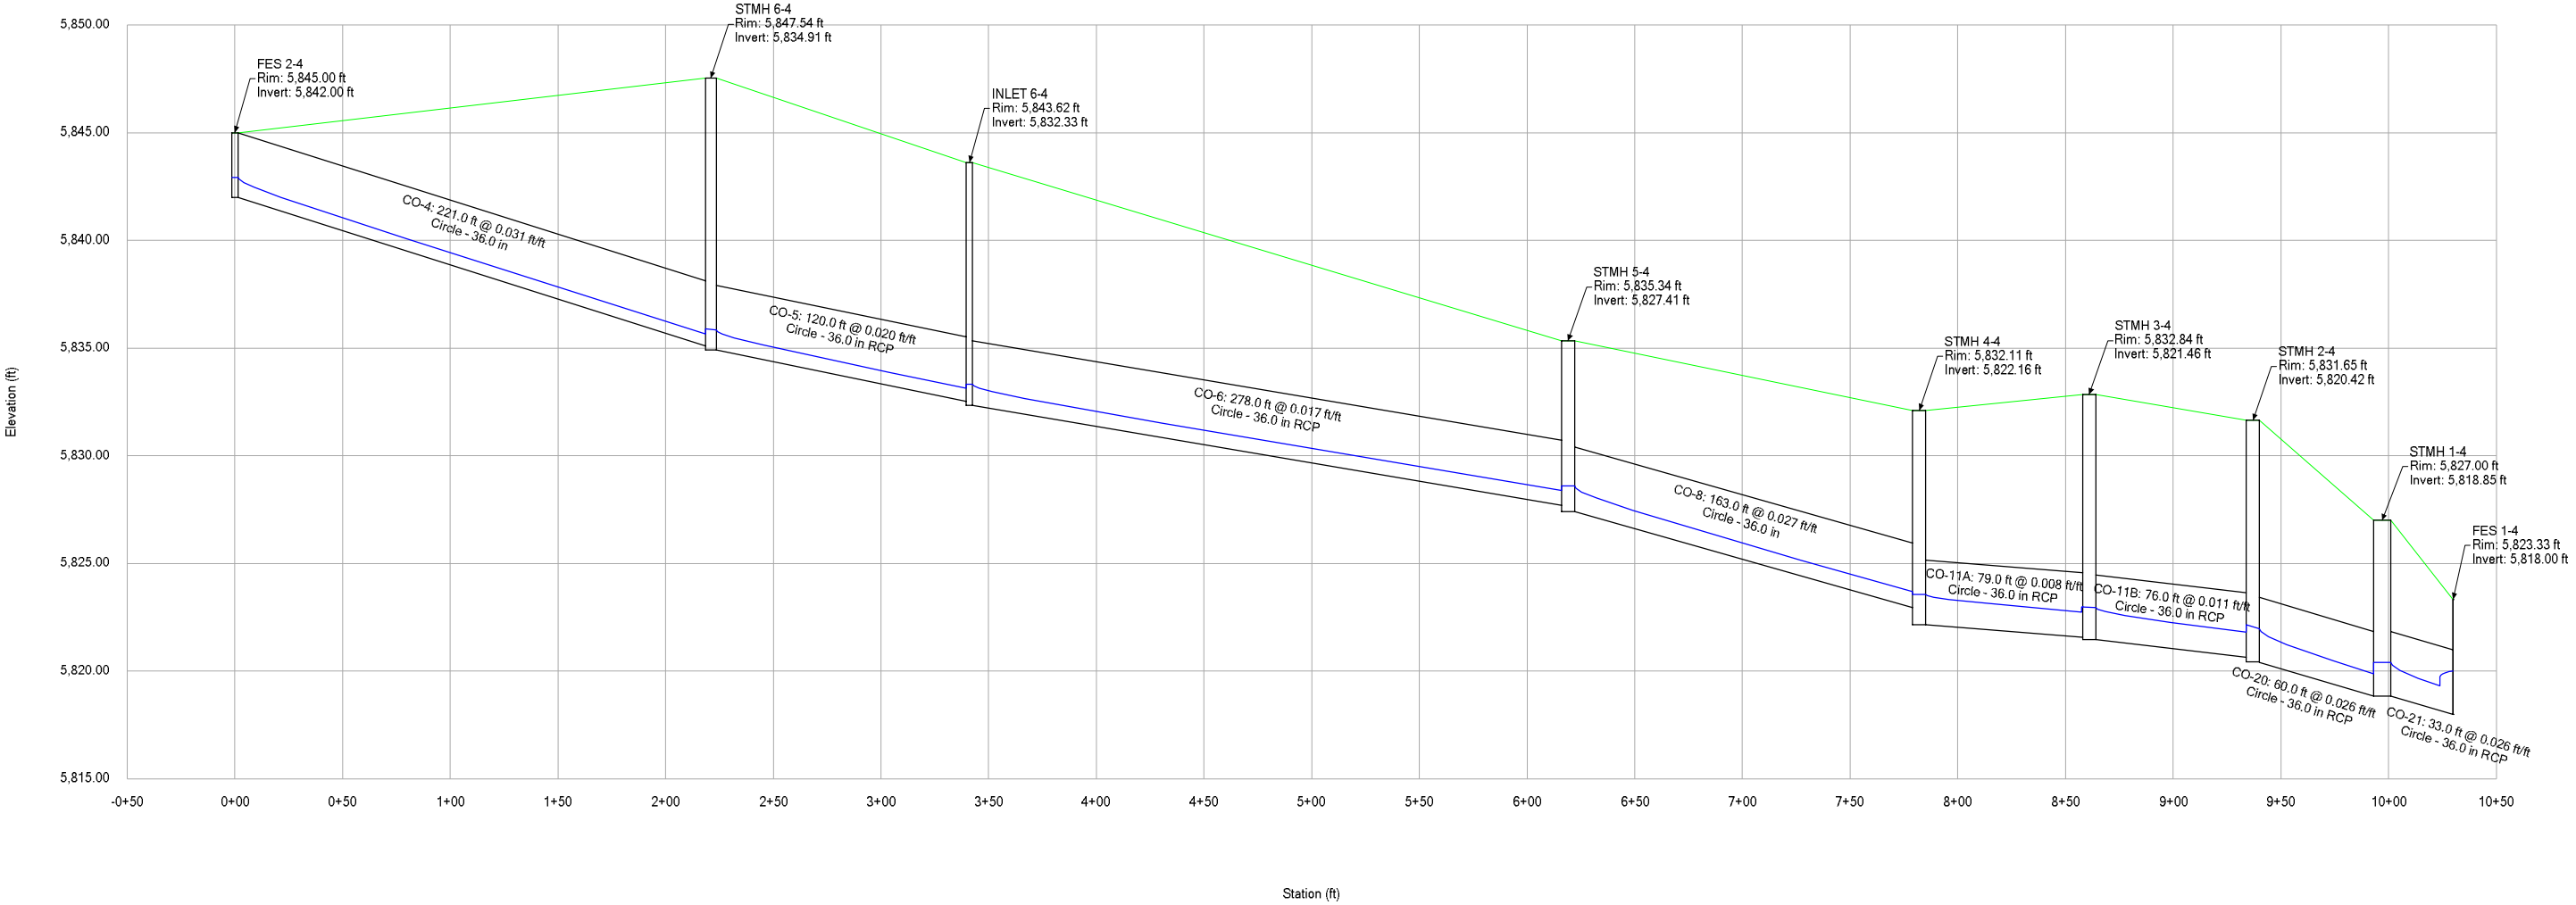


Profile Report
Engineering Profile - Profile - Storm Line 4 (Compark Village South StormCAD [5 year].stsw)

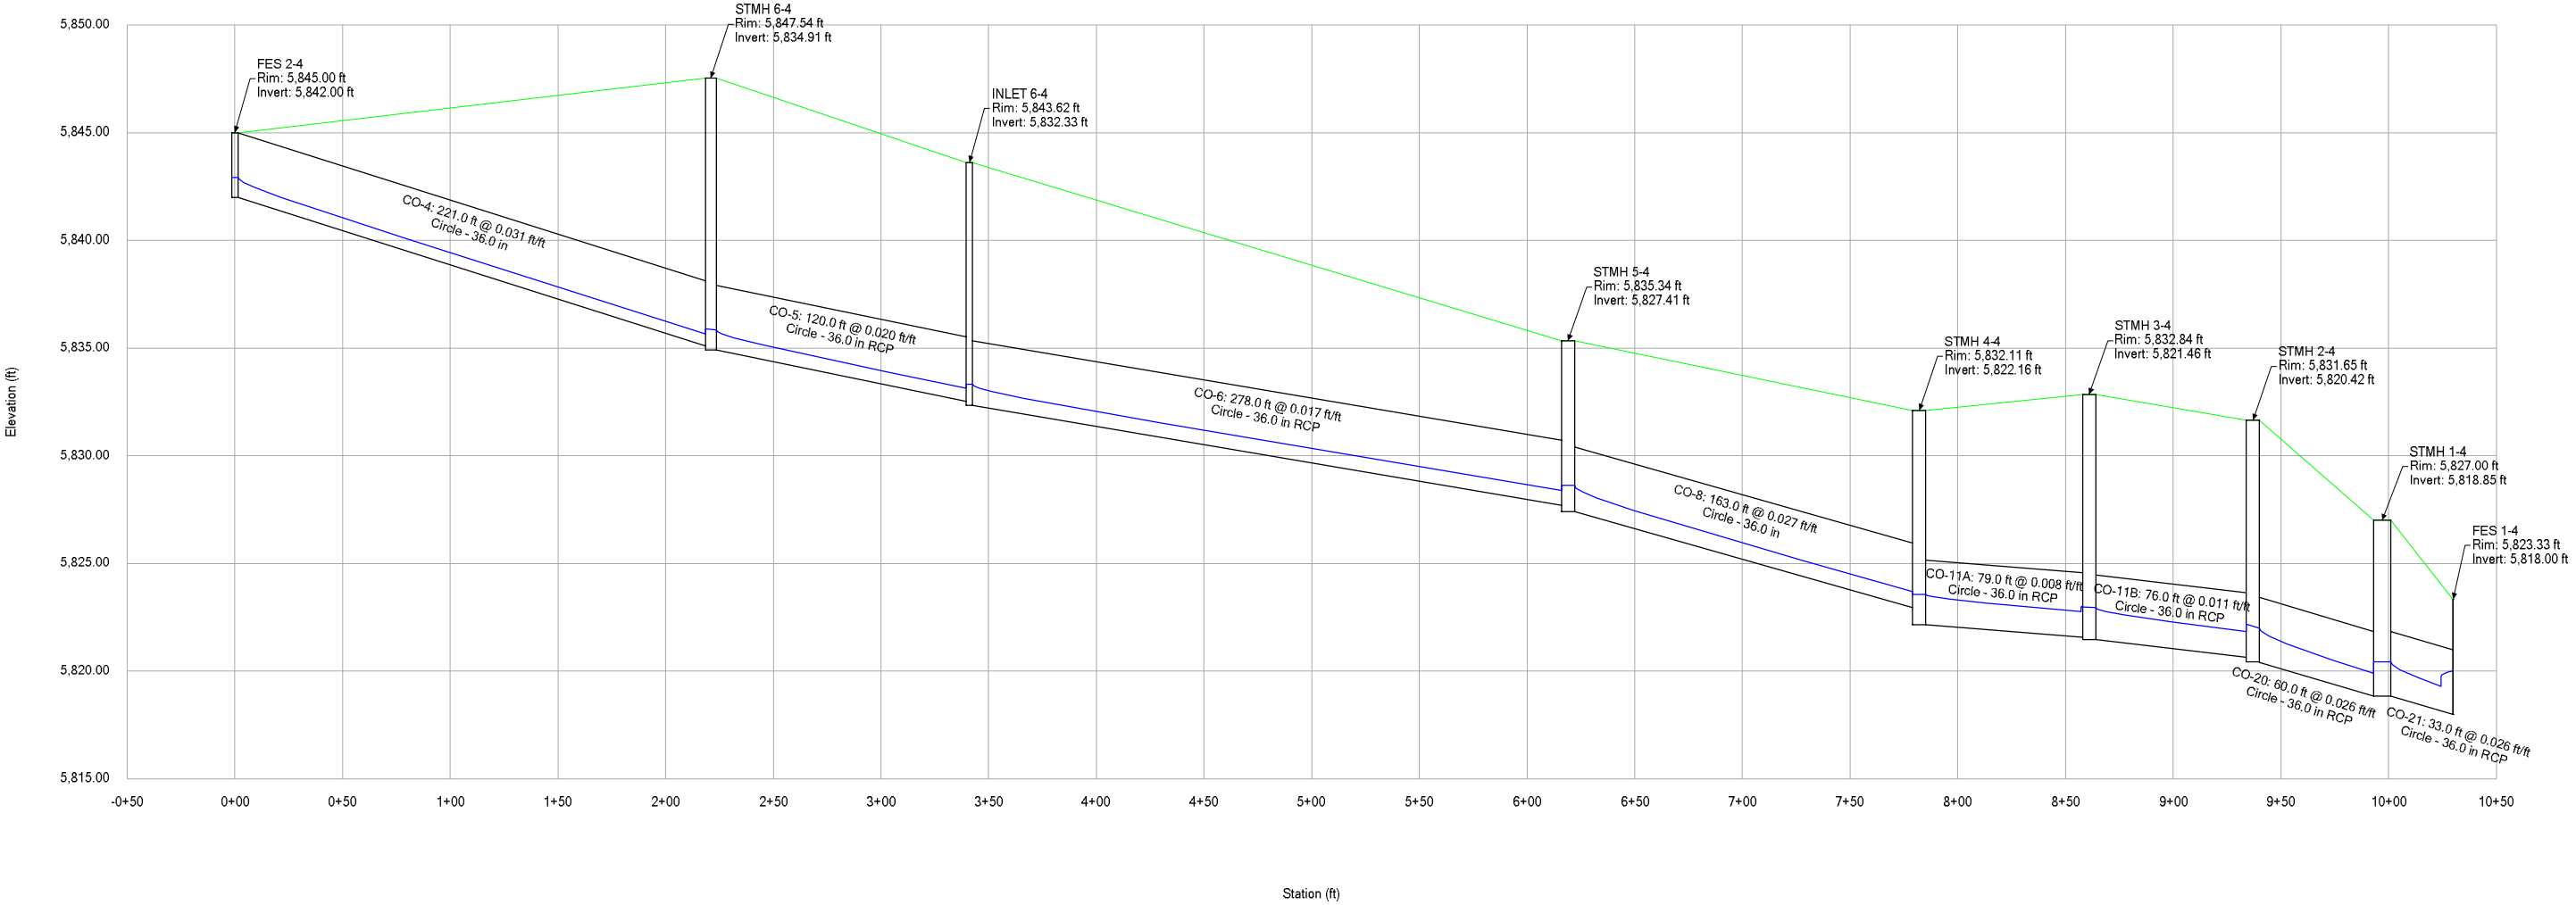


Profile Report
Engineering Profile - Profile - Storm Line 4 (Compark Village South StormCAD [100 year].stsw)

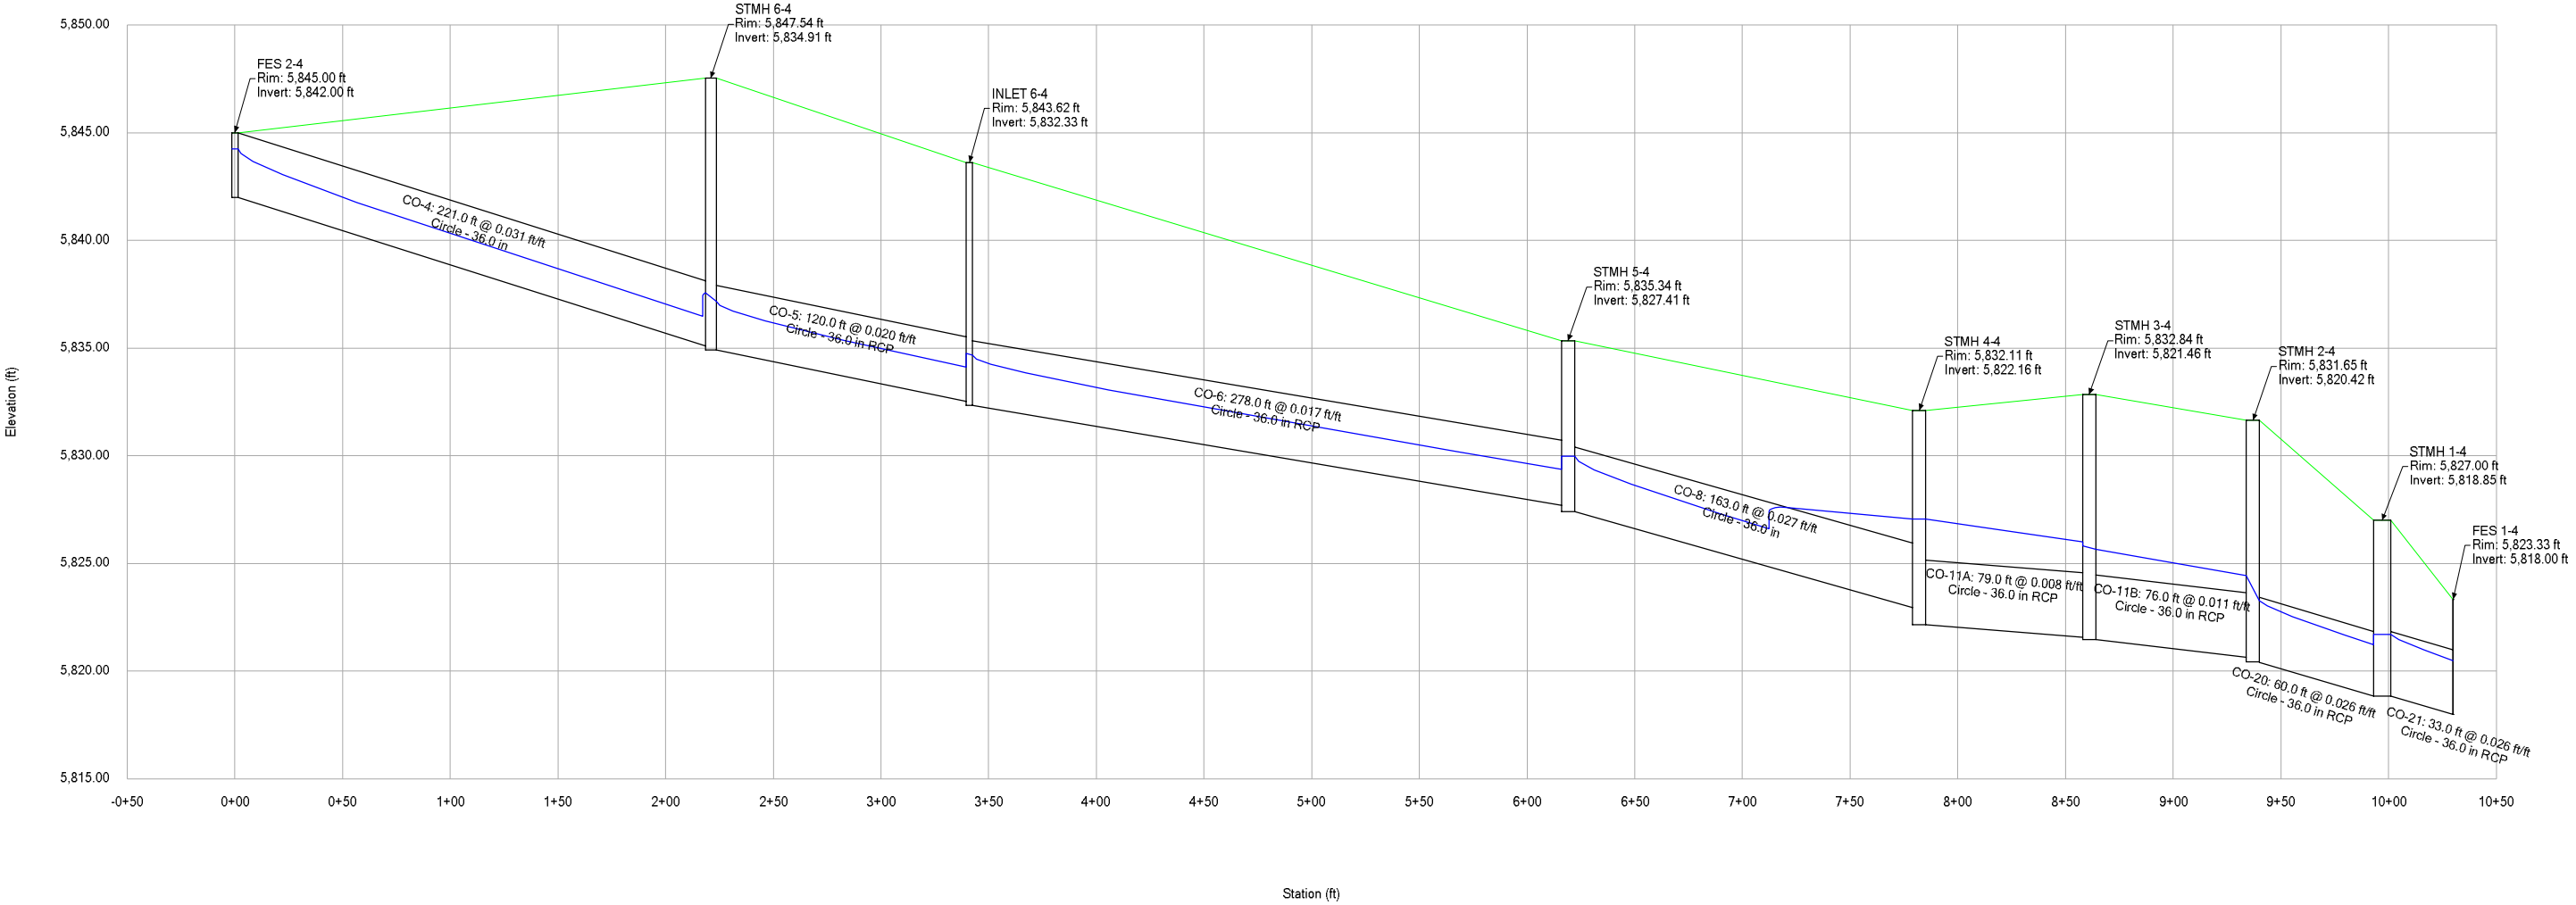


Profile Report
Engineering Profile - Profile - Storm Line 4A (Compark Village South StormCAD [2 year].stsw)

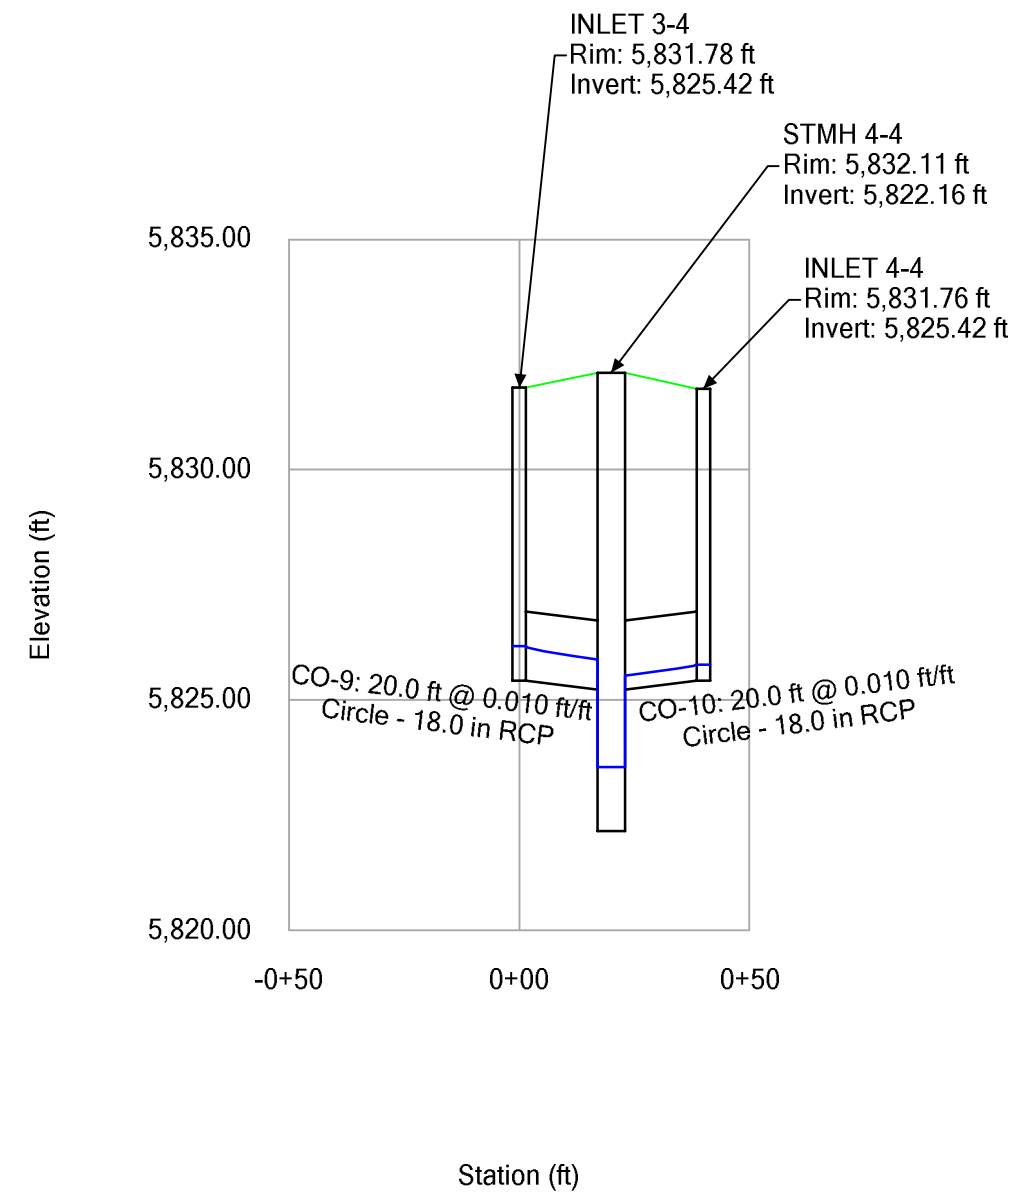


Profile Report
Engineering Profile - Profile - Storm Line 4A (Compark Village South StormCAD [5 year].stsw)

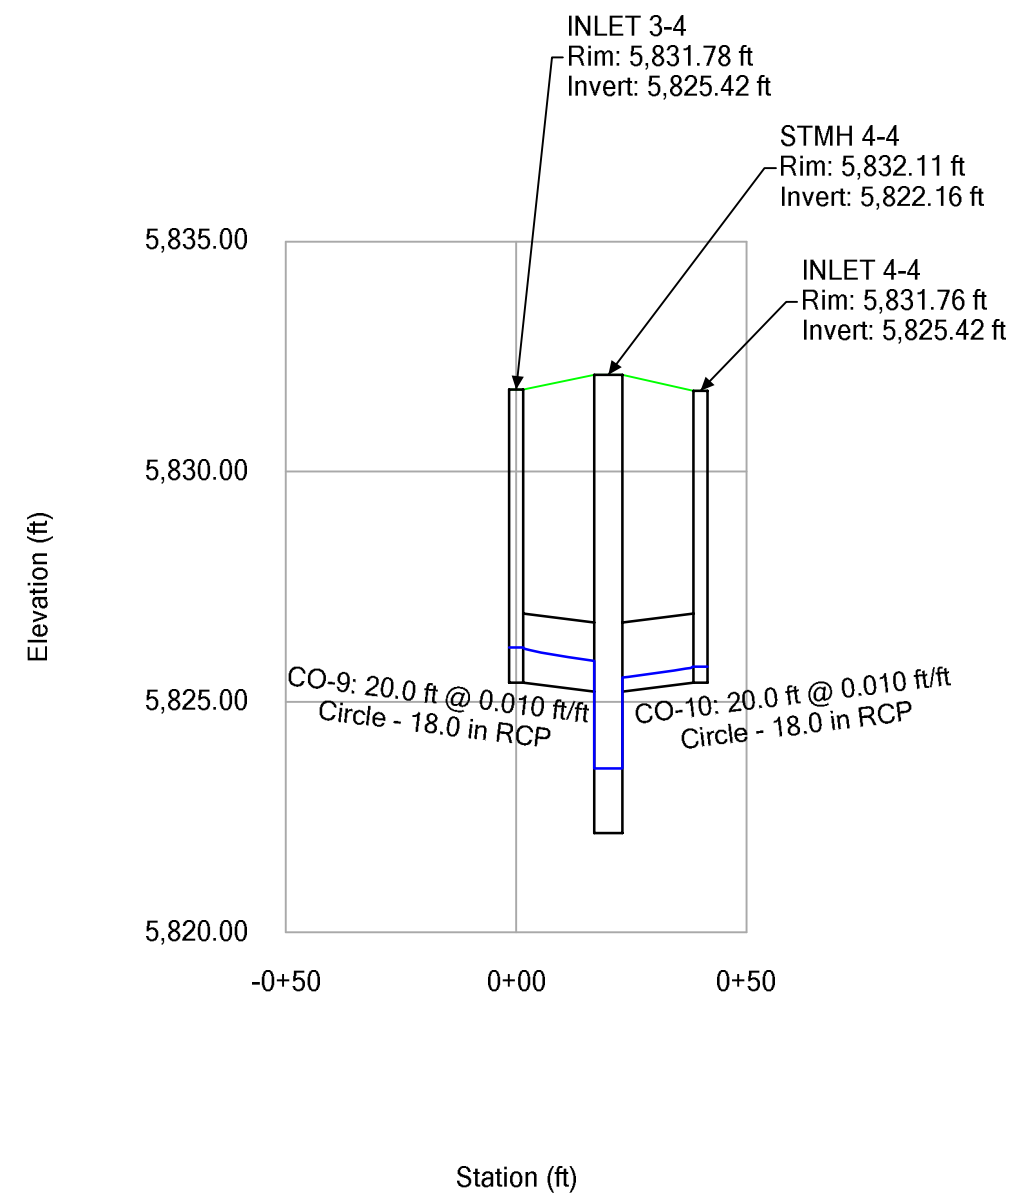


Profile Report
Engineering Profile - Profile - Storm Line 4A (Compark Village South StormCAD [100 year].stsw)

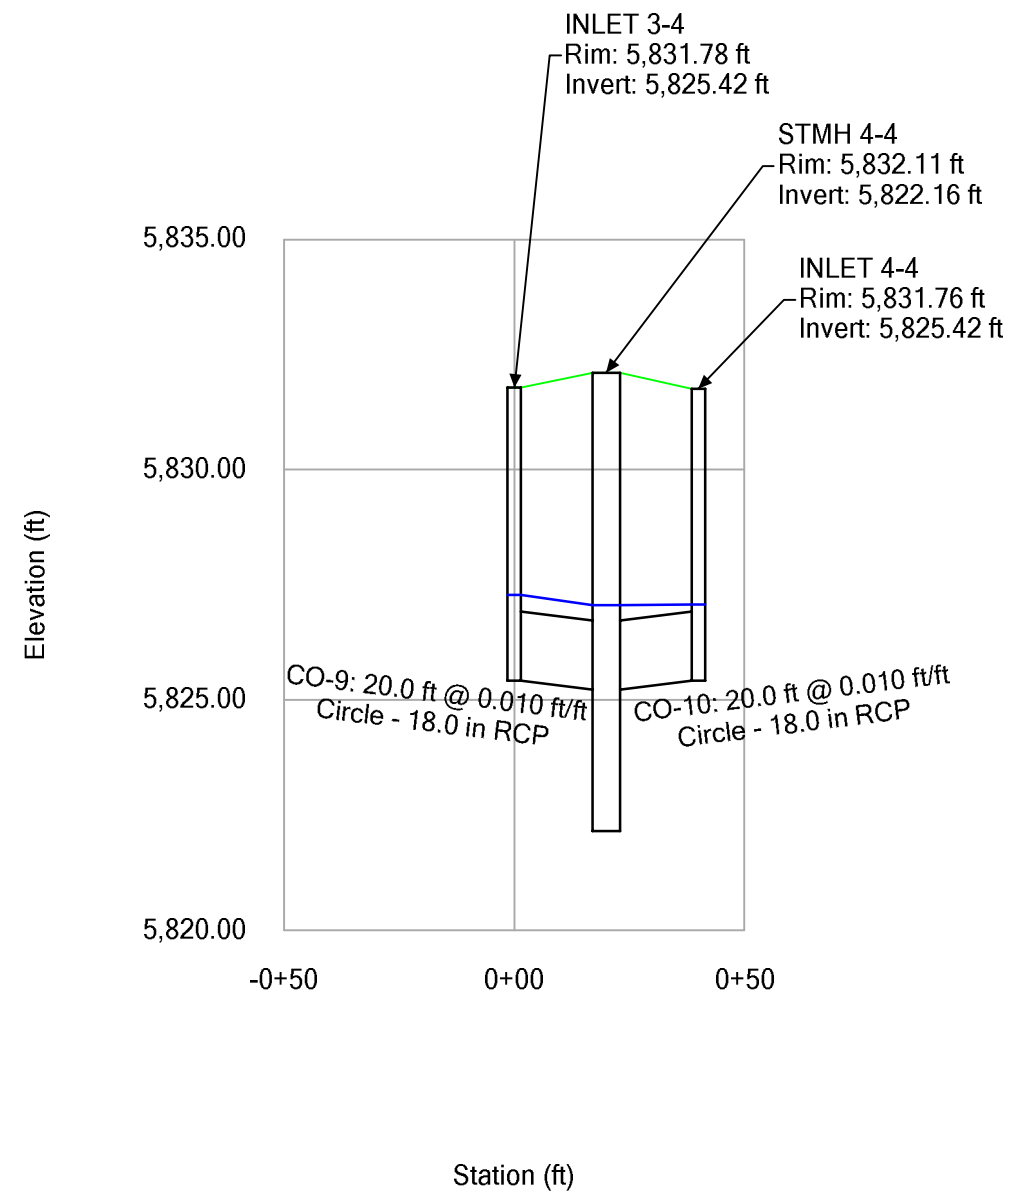


Profile Report
Engineering Profile - Profile - Storm Line 4B (Compark Village South StormCAD [2 year].stsw)

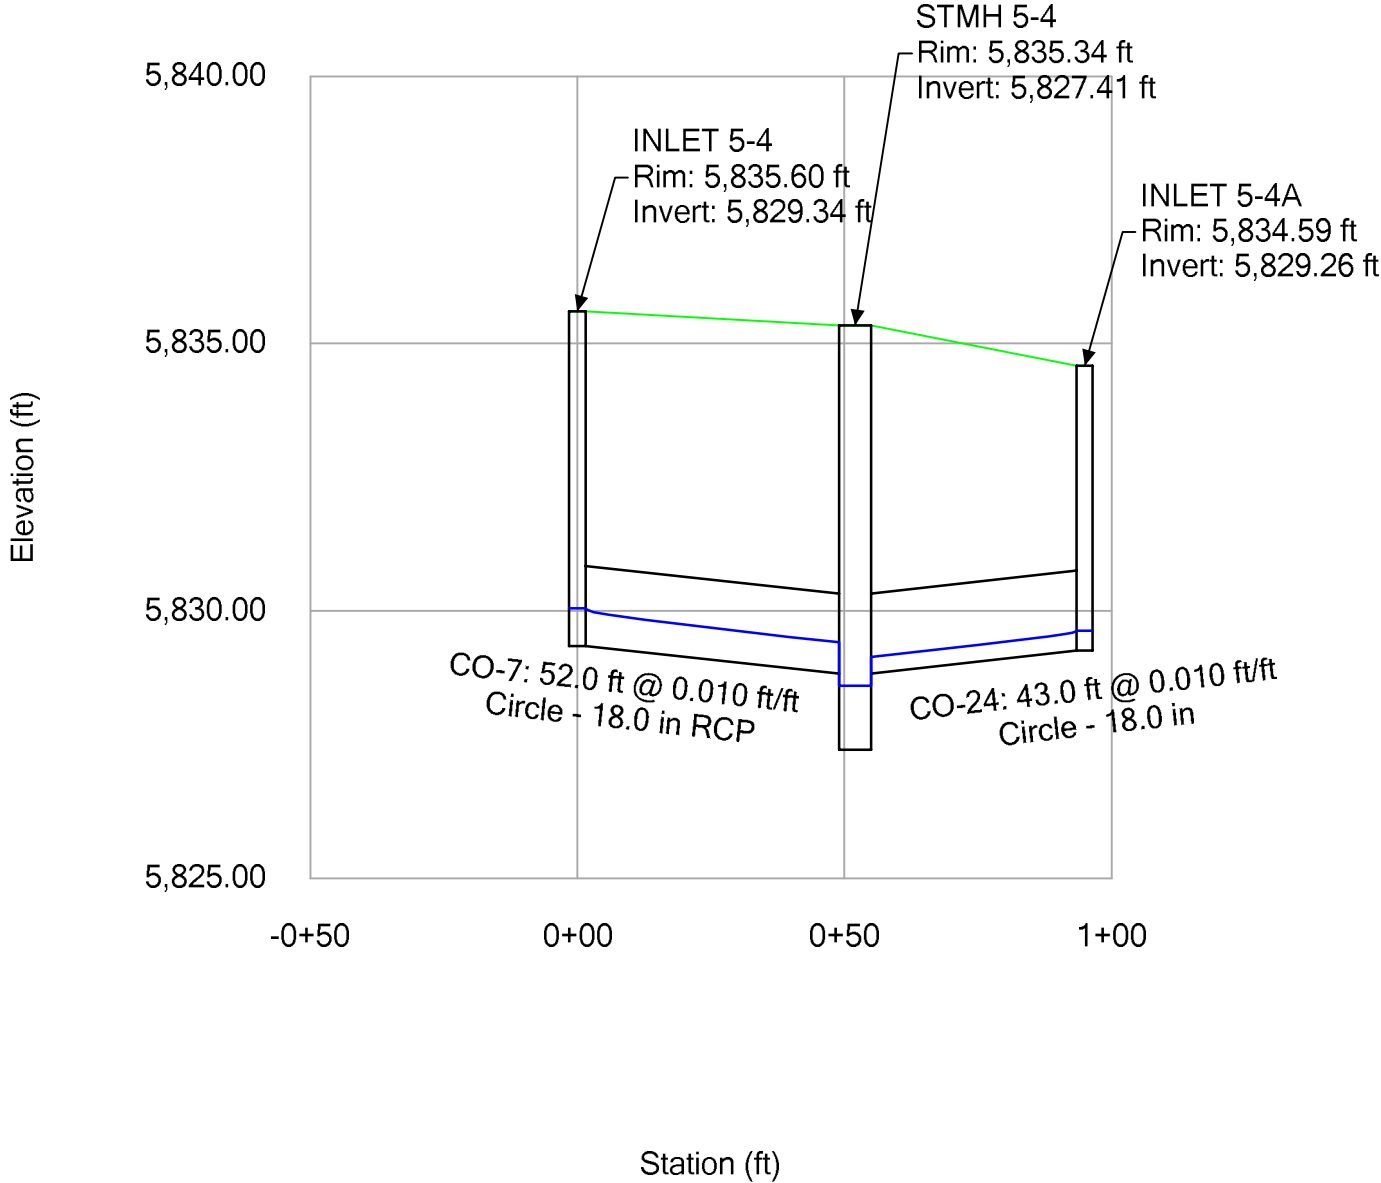


Profile Report
Engineering Profile - Profile - Storm Line 4B (Compark Village South StormCAD [5 year].stsw)

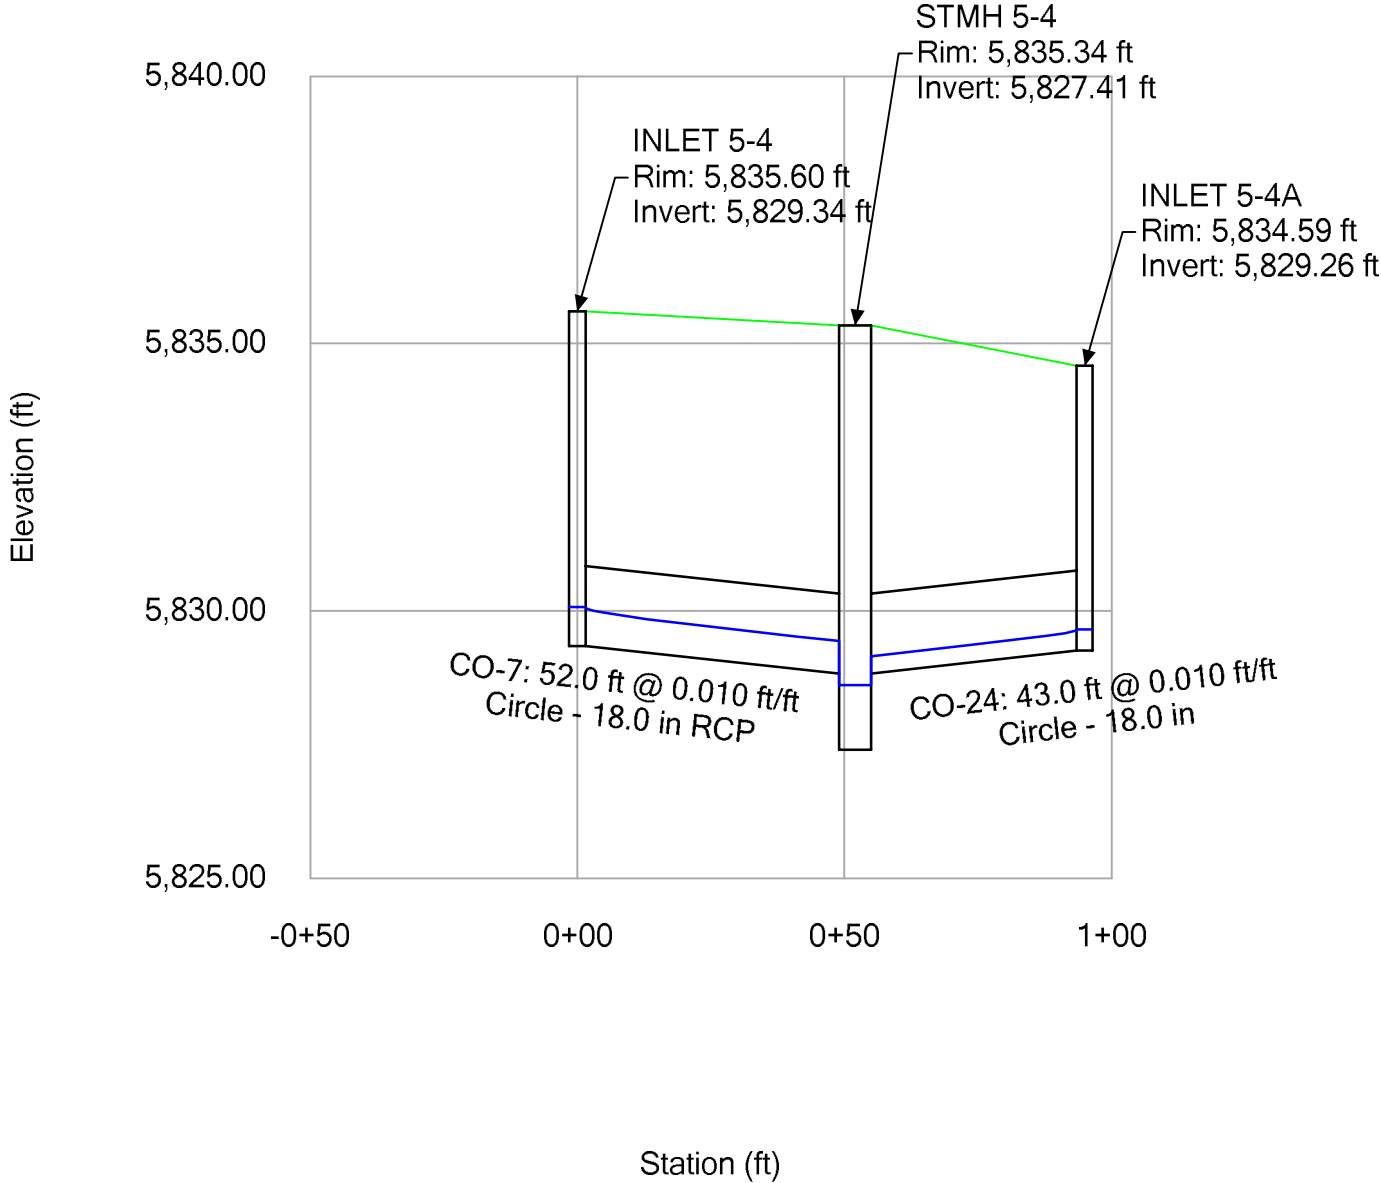


Profile Report
Engineering Profile - Profile - Storm Line 4B (Compark Village South StormCAD [100 year].stsw)

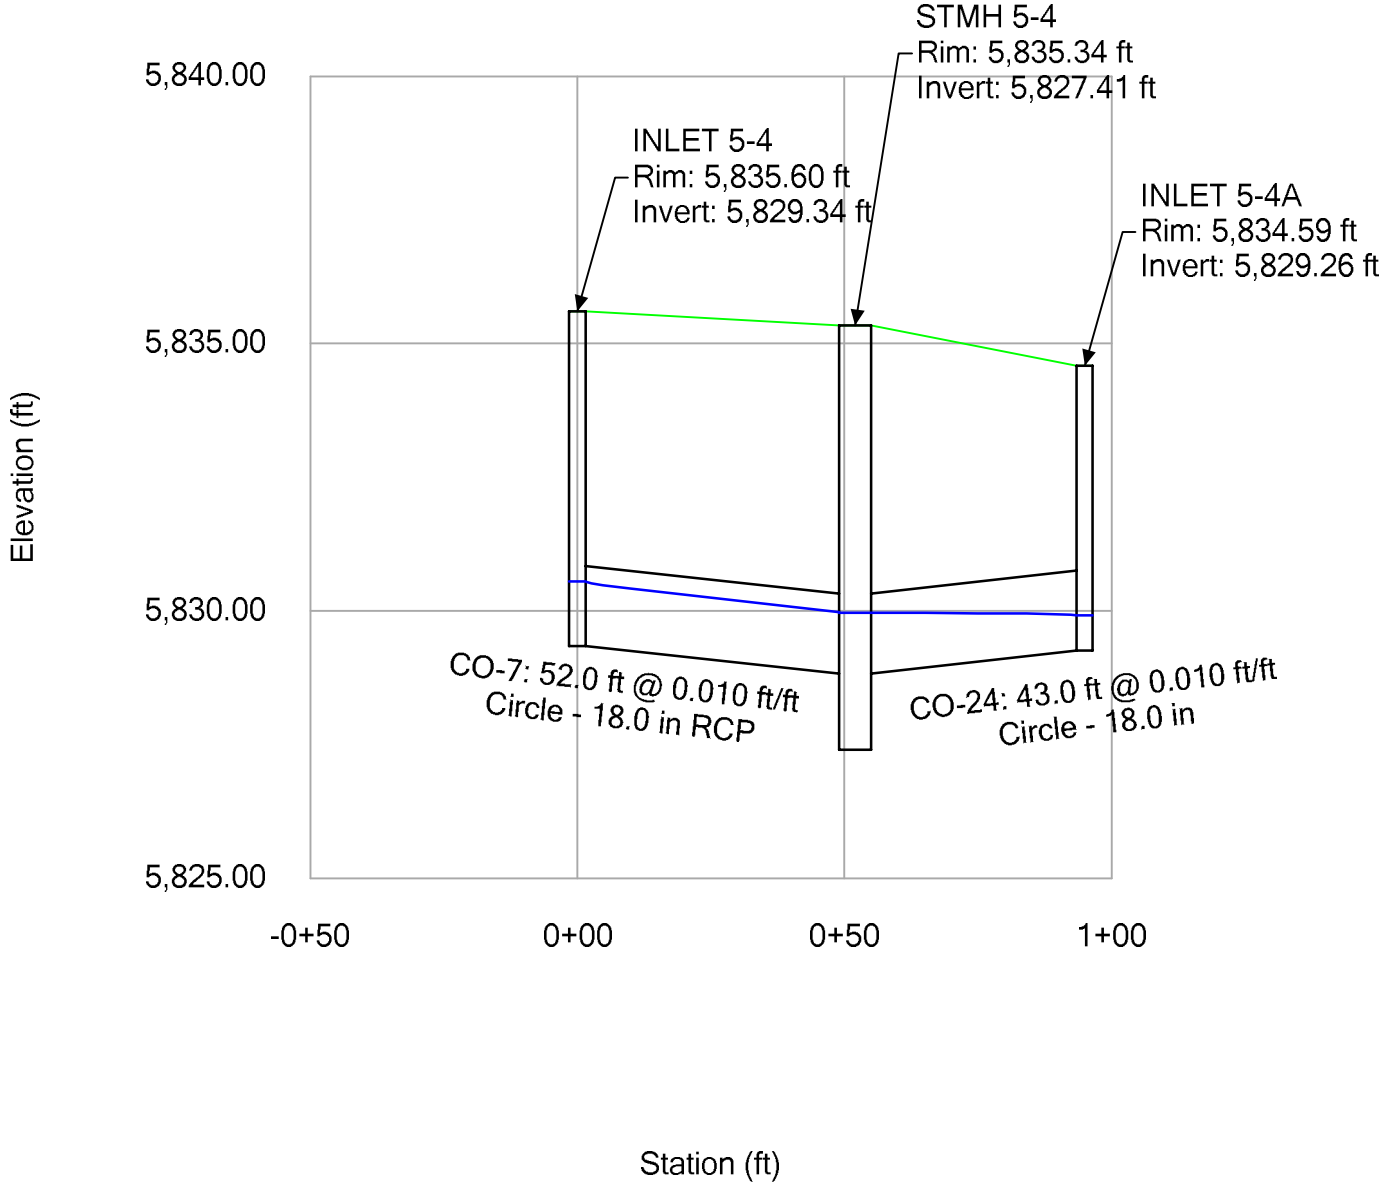


Profile Report
Engineering Profile - Profile - Storm Line 5 (Compark Village South StormCAD [2 year].stsw)

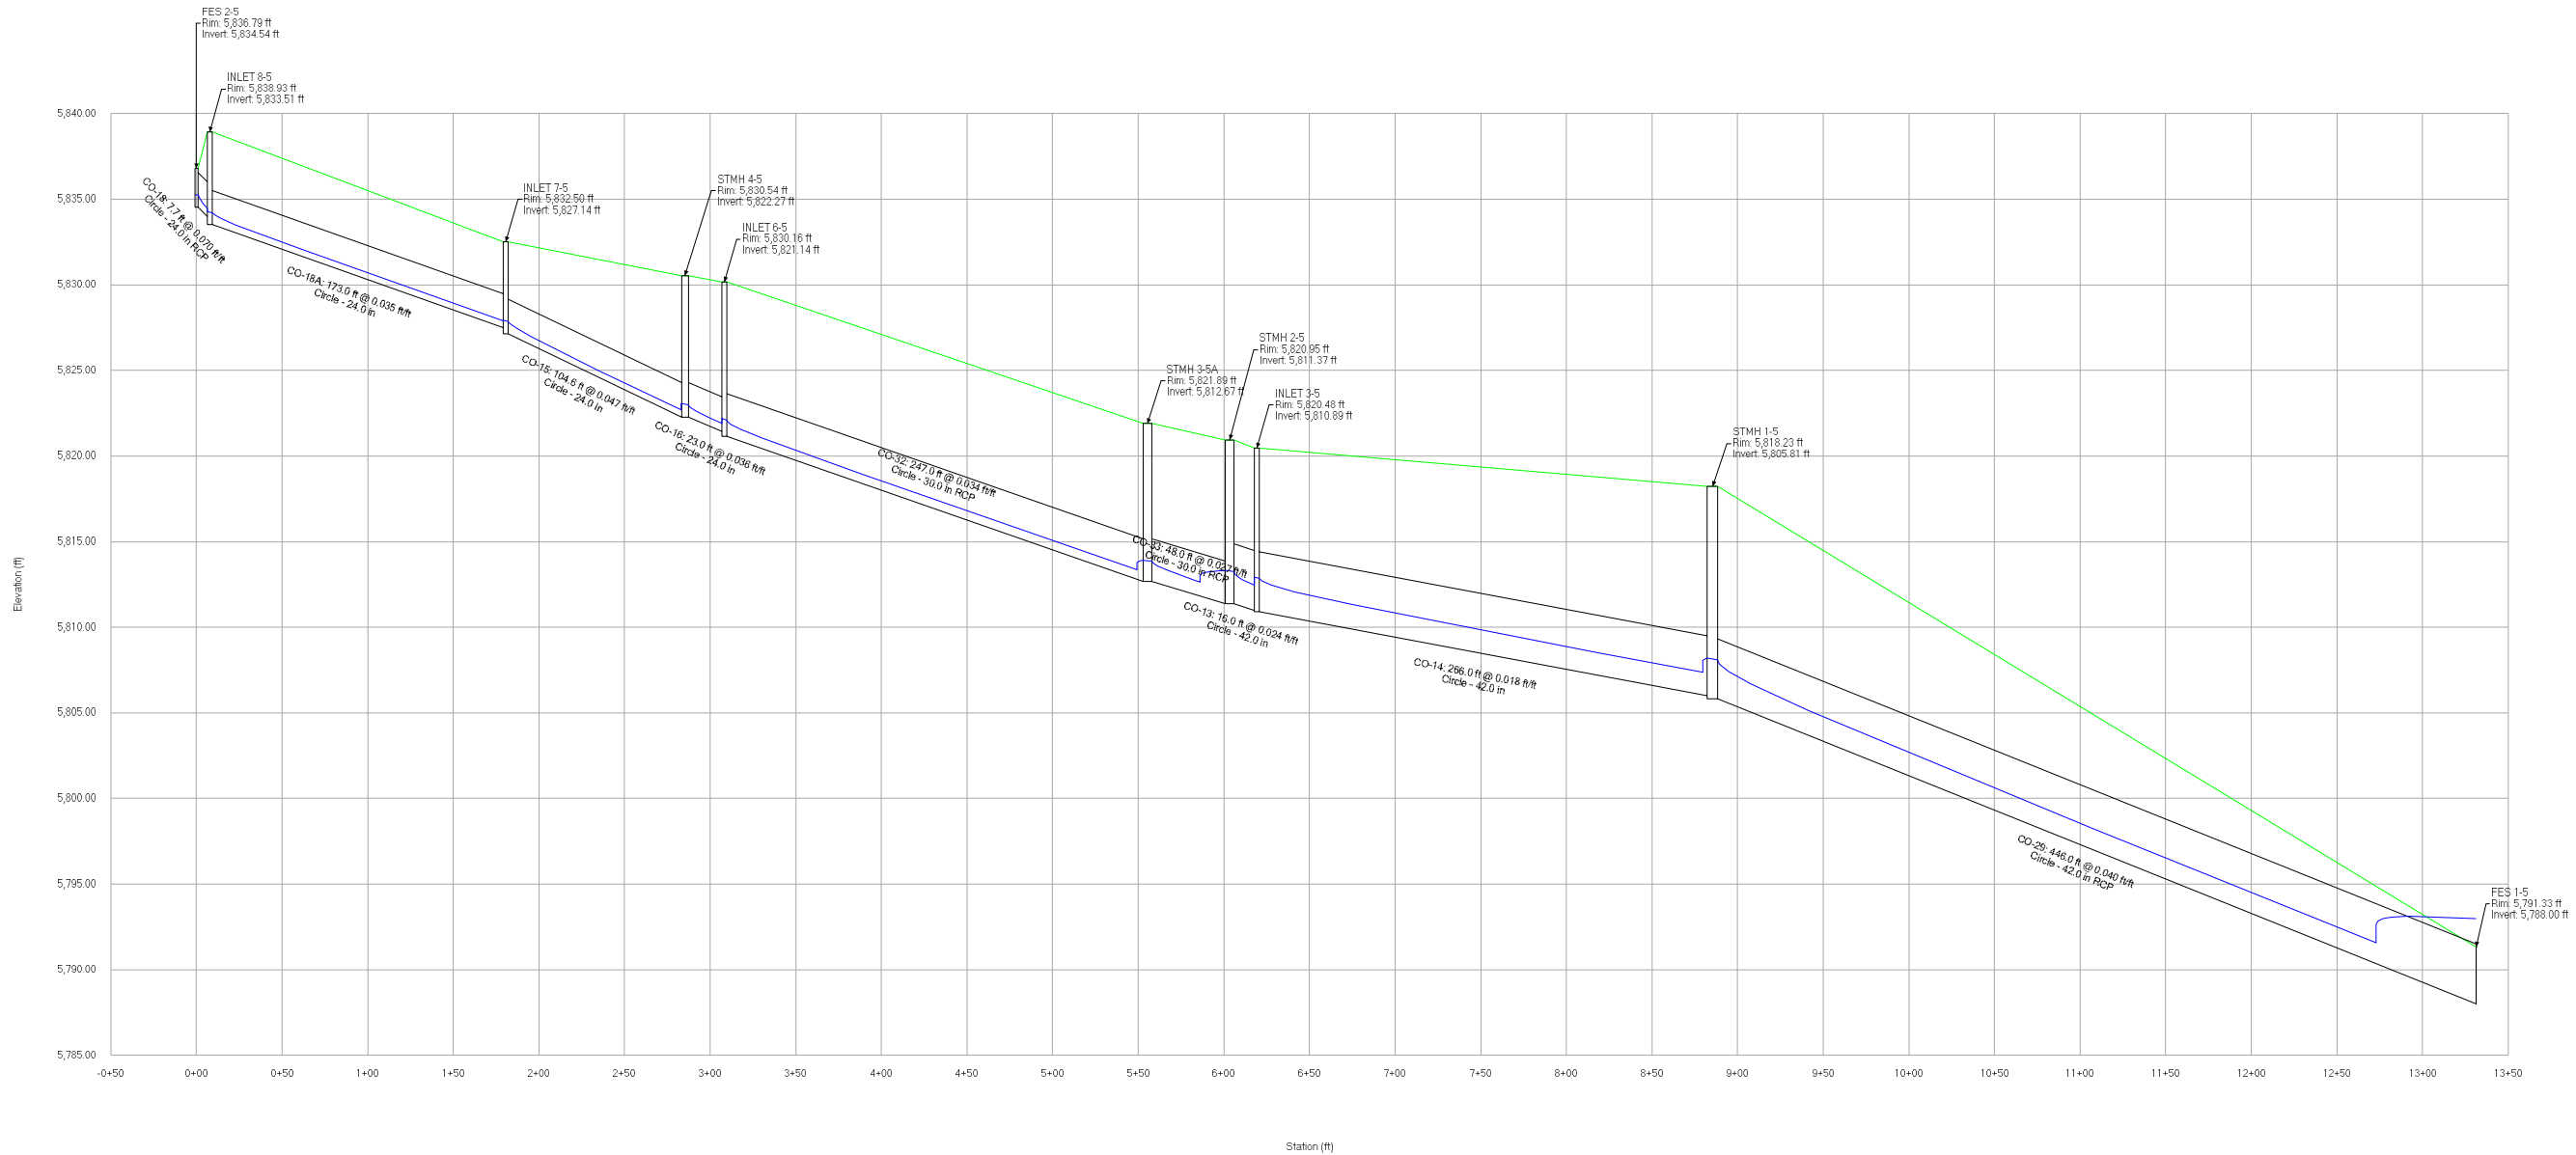


Profile Report
Engineering Profile - Profile - Storm Line 5 (Compark Village South StormCAD [5 year].stsw)

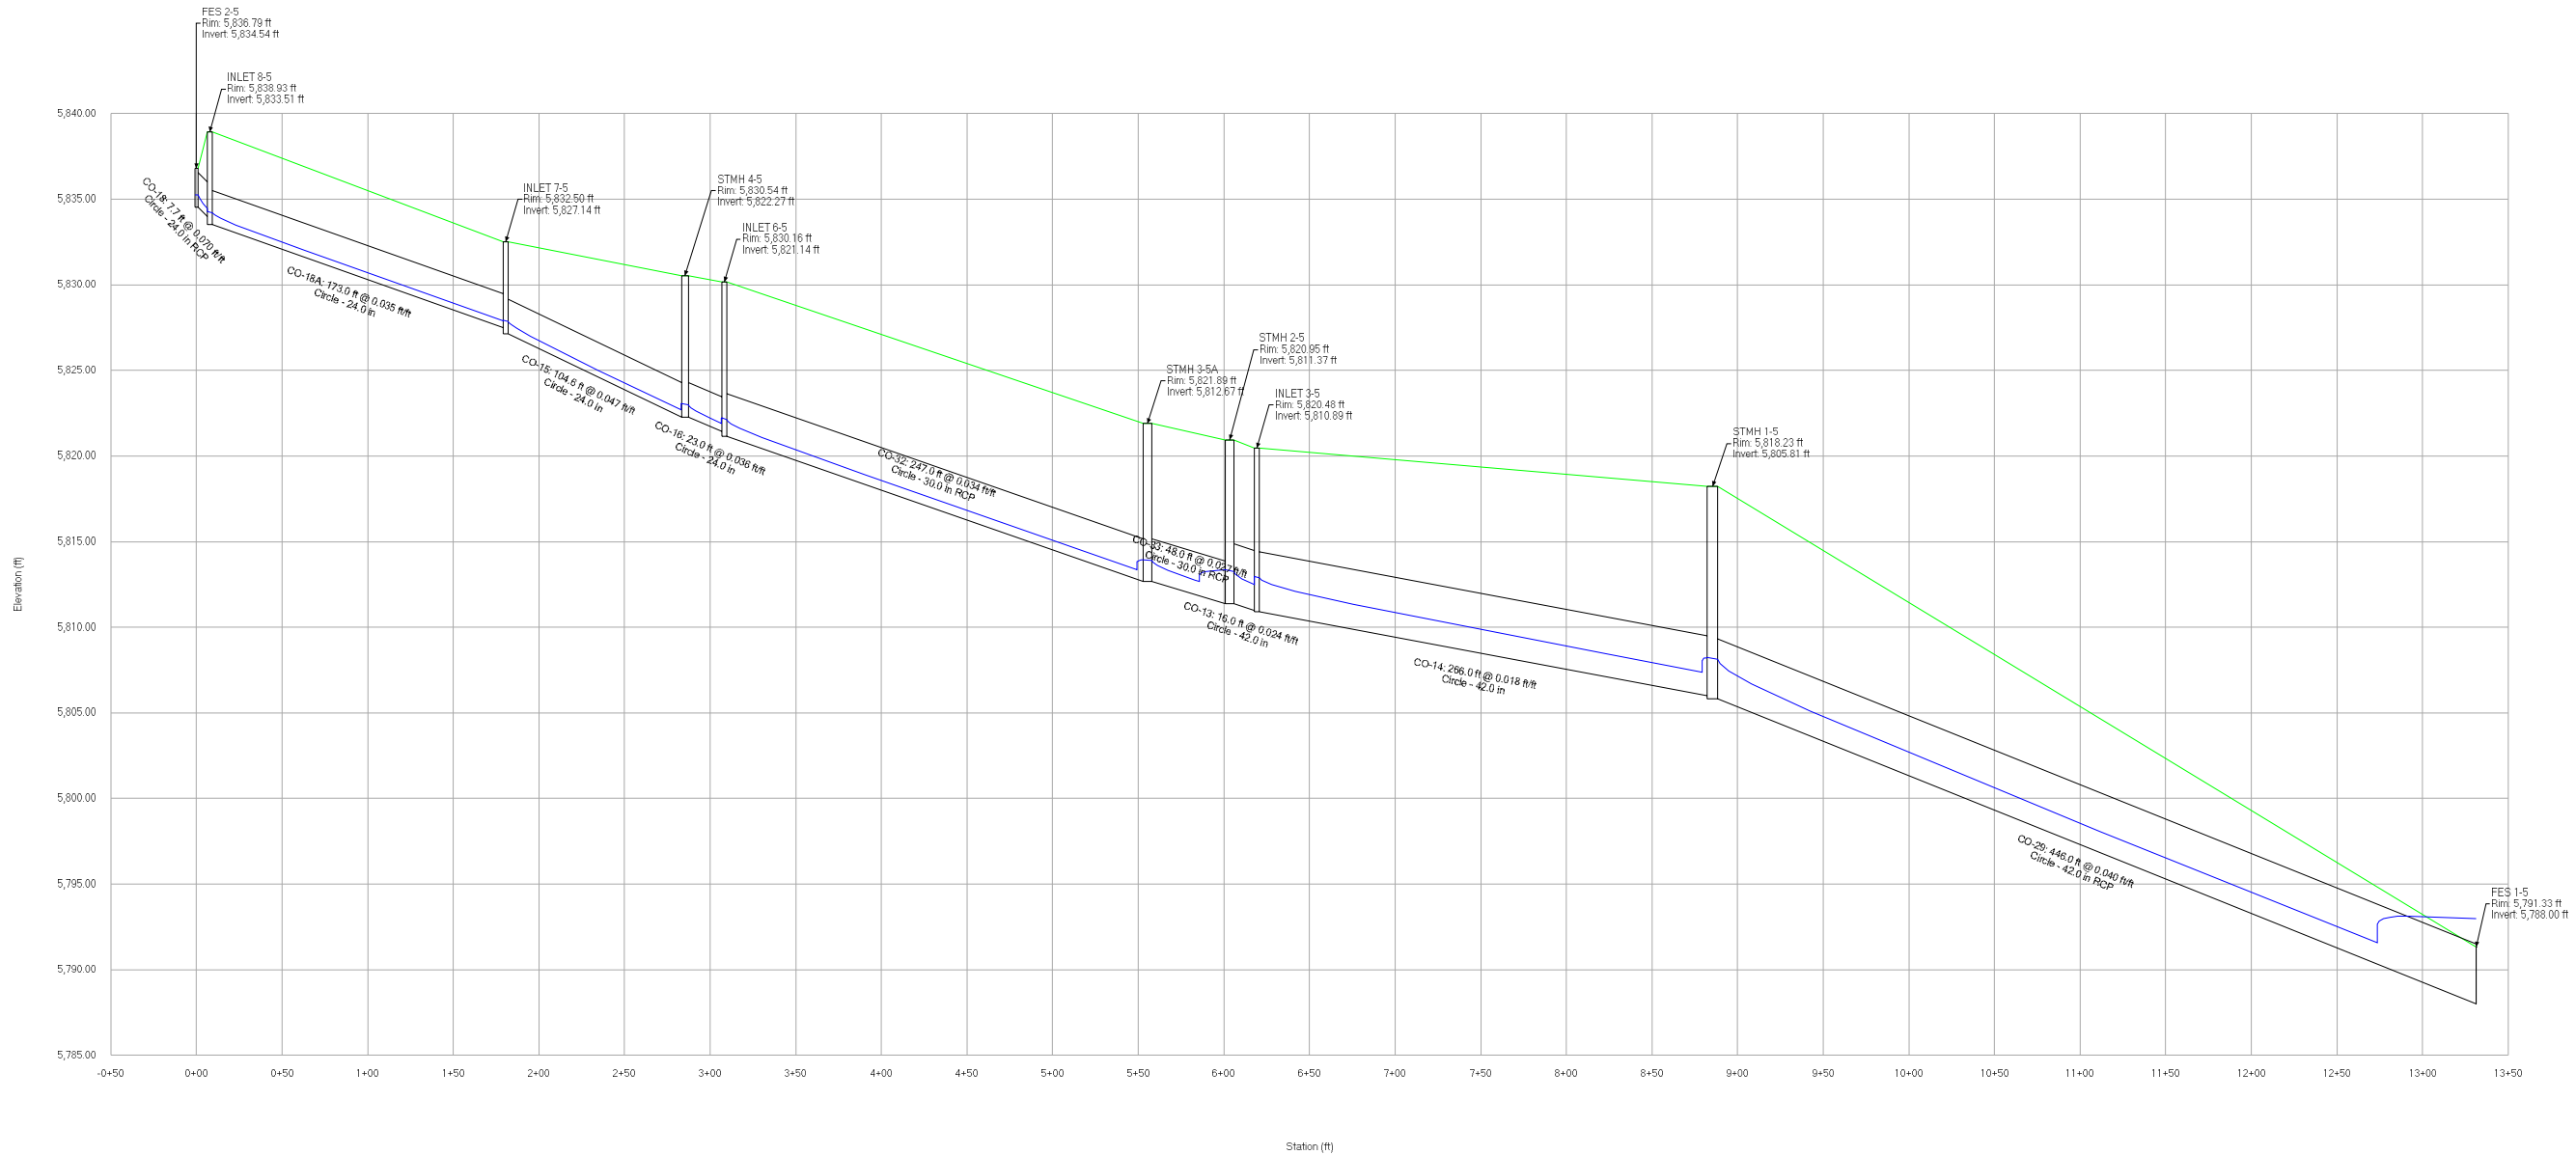


Profile Report
Engineering Profile - Profile - Storm Line 5 (Compark Village South StormCAD [100 year].stsw)

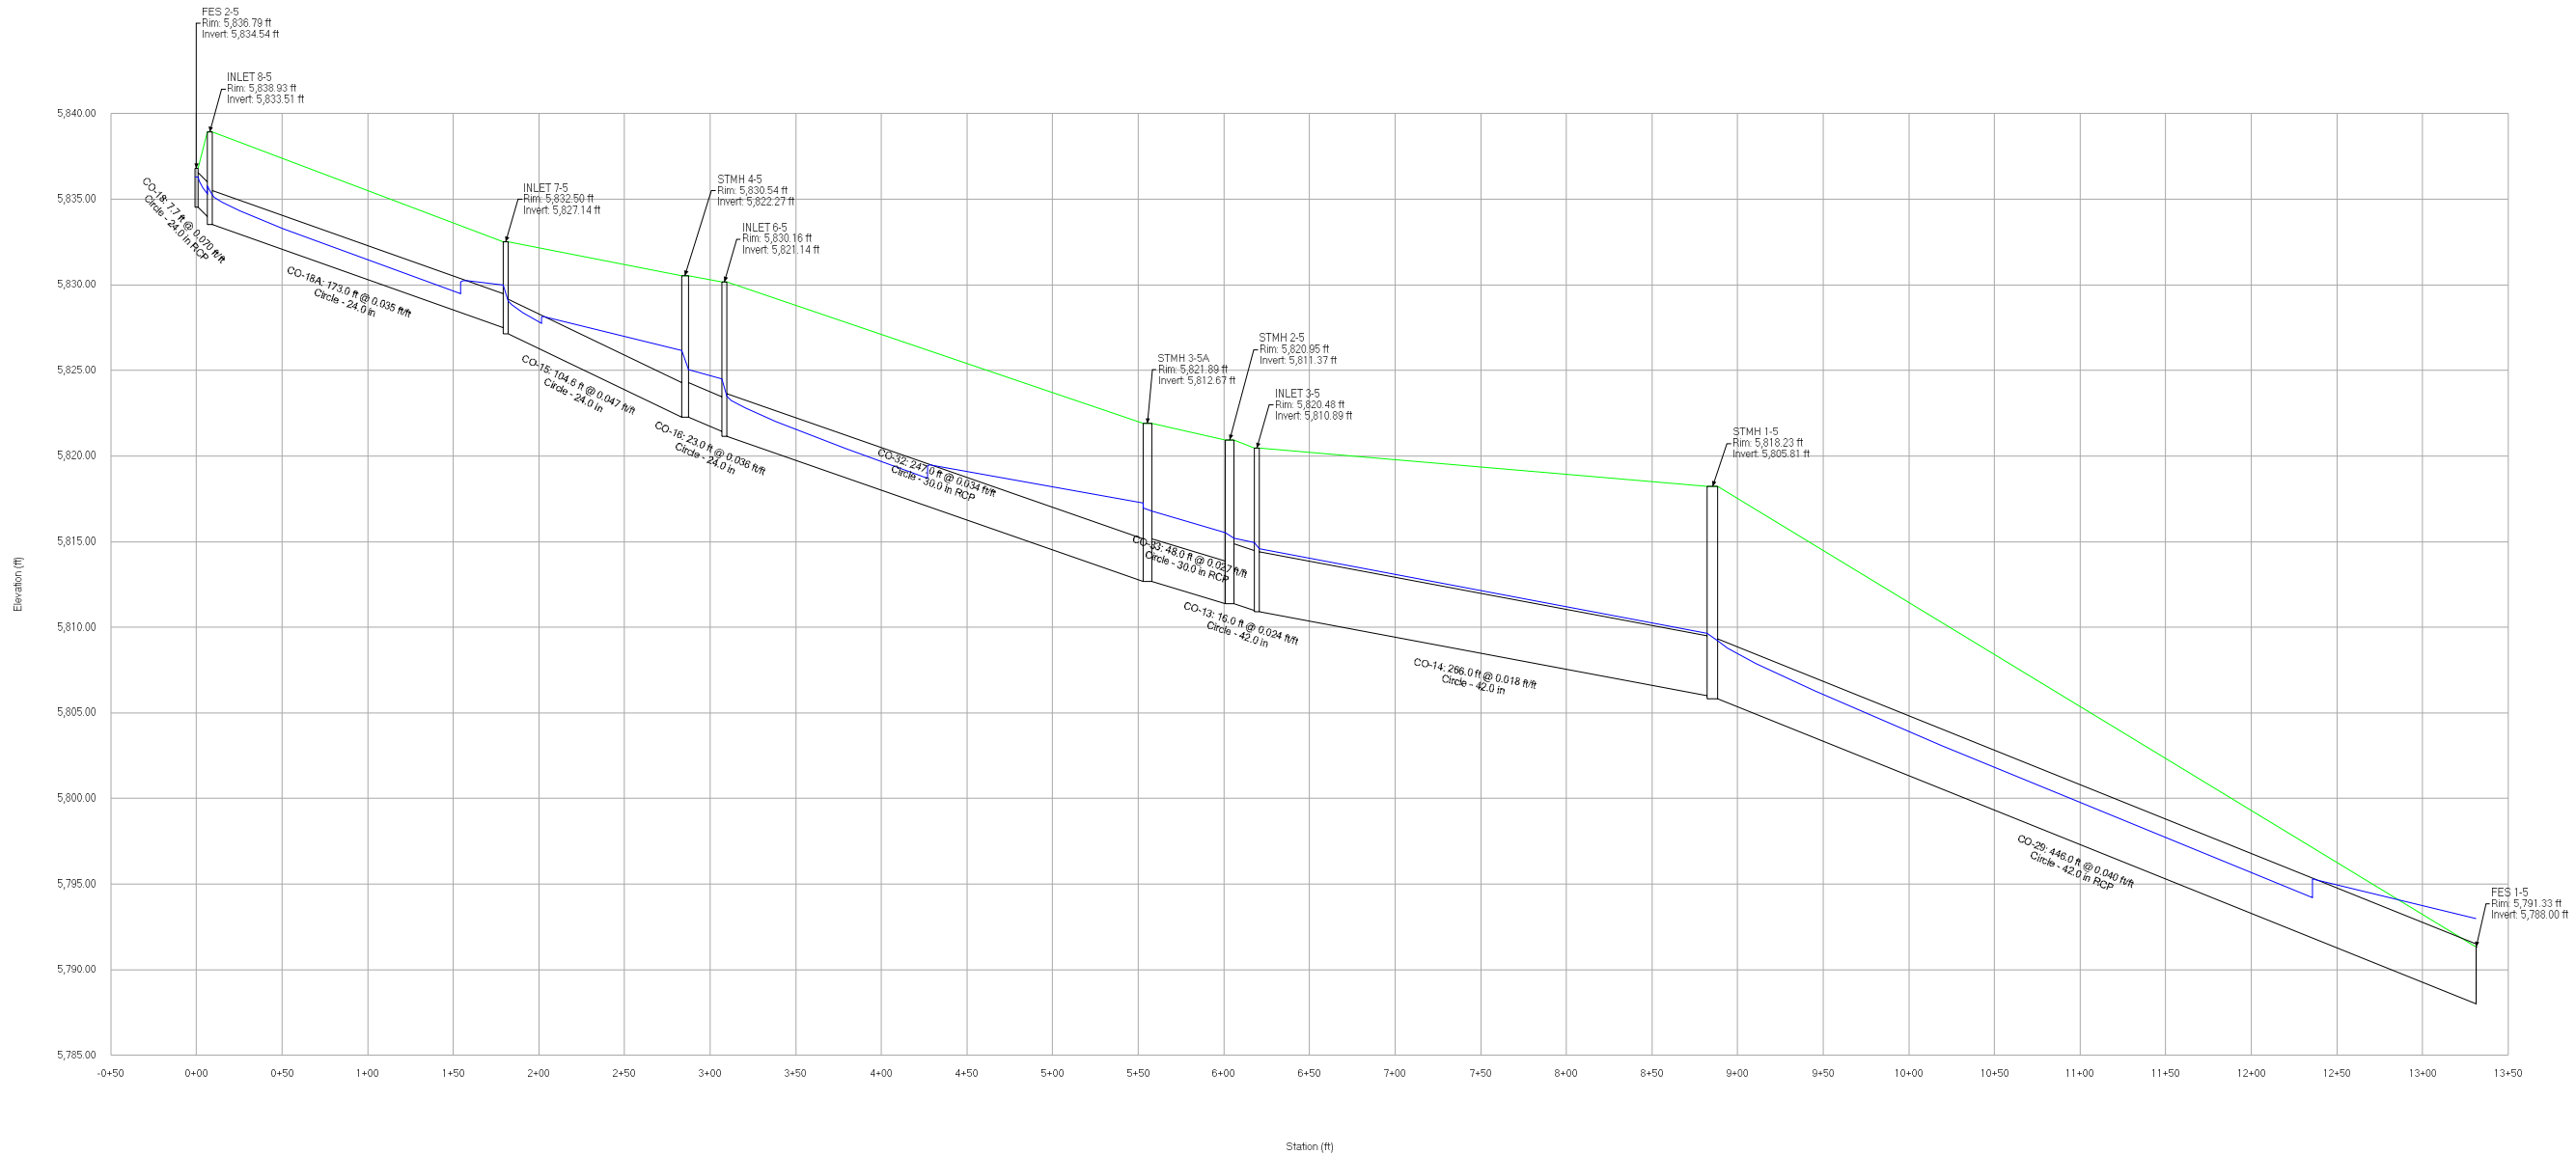


Profile Report
Engineering Profile - Profile - Storm Line 5B (Compark Village South StormCAD [2 year].stsw)

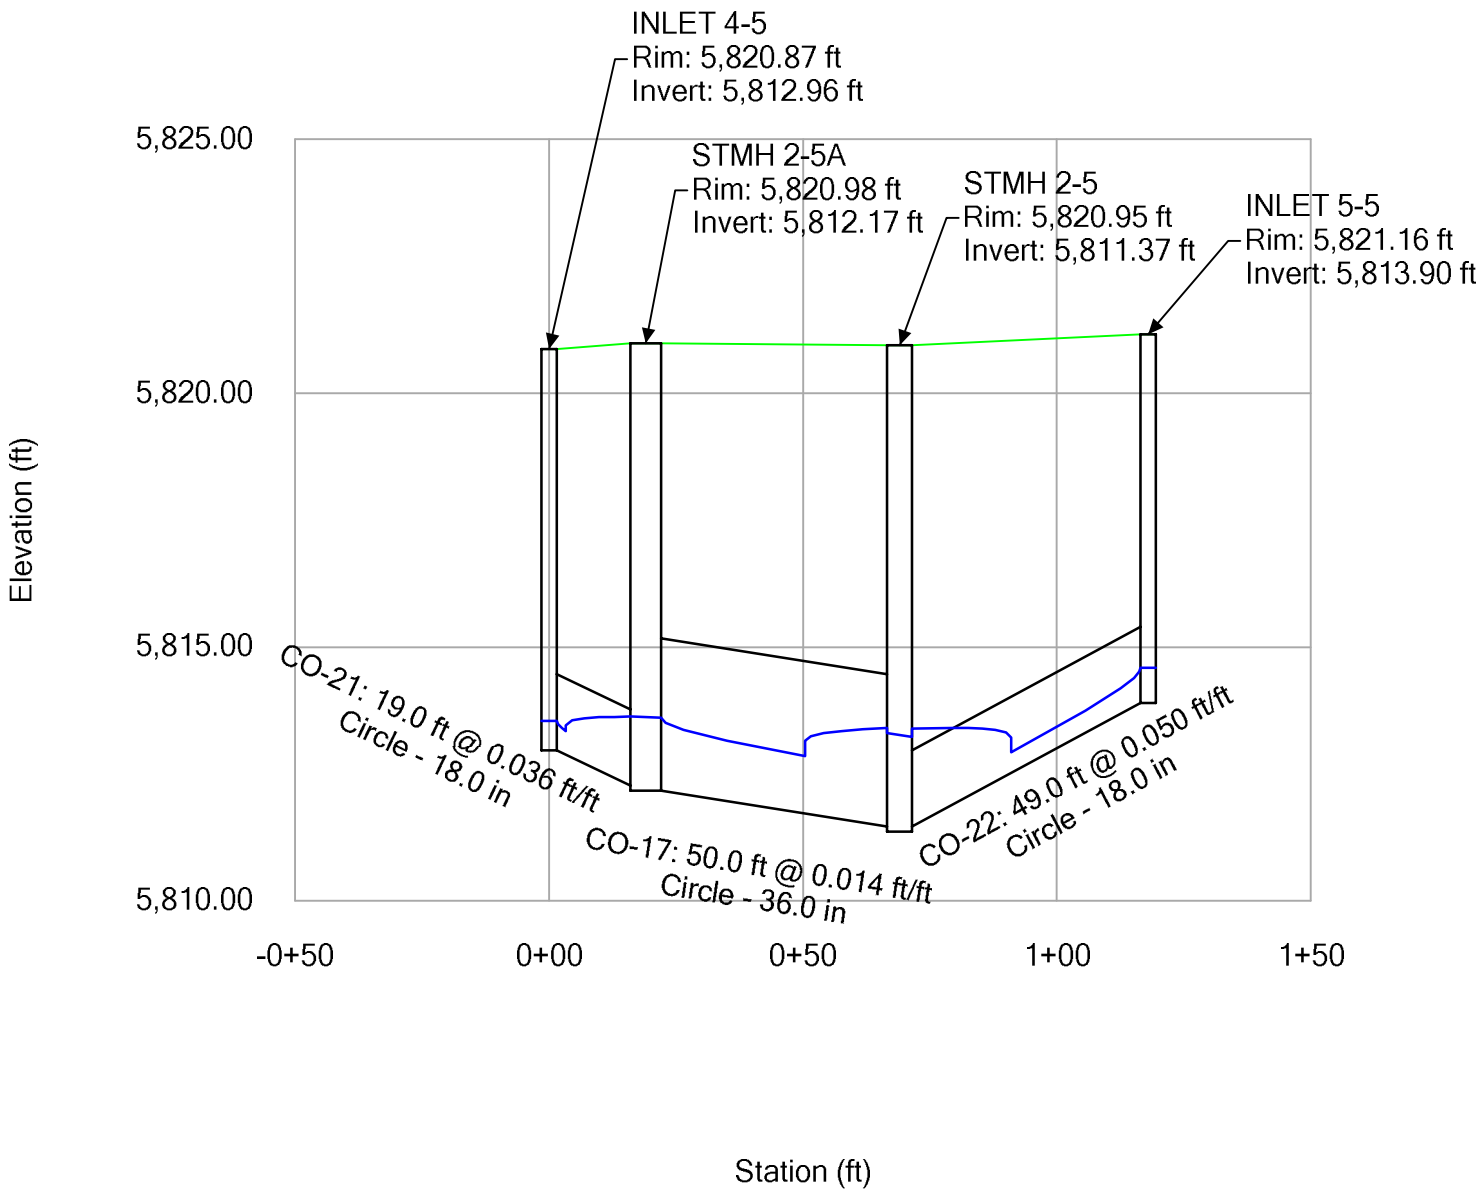


Profile Report
Engineering Profile - Profile - Storm Line 5B (Compark Village South StormCAD [5 year].stsw)

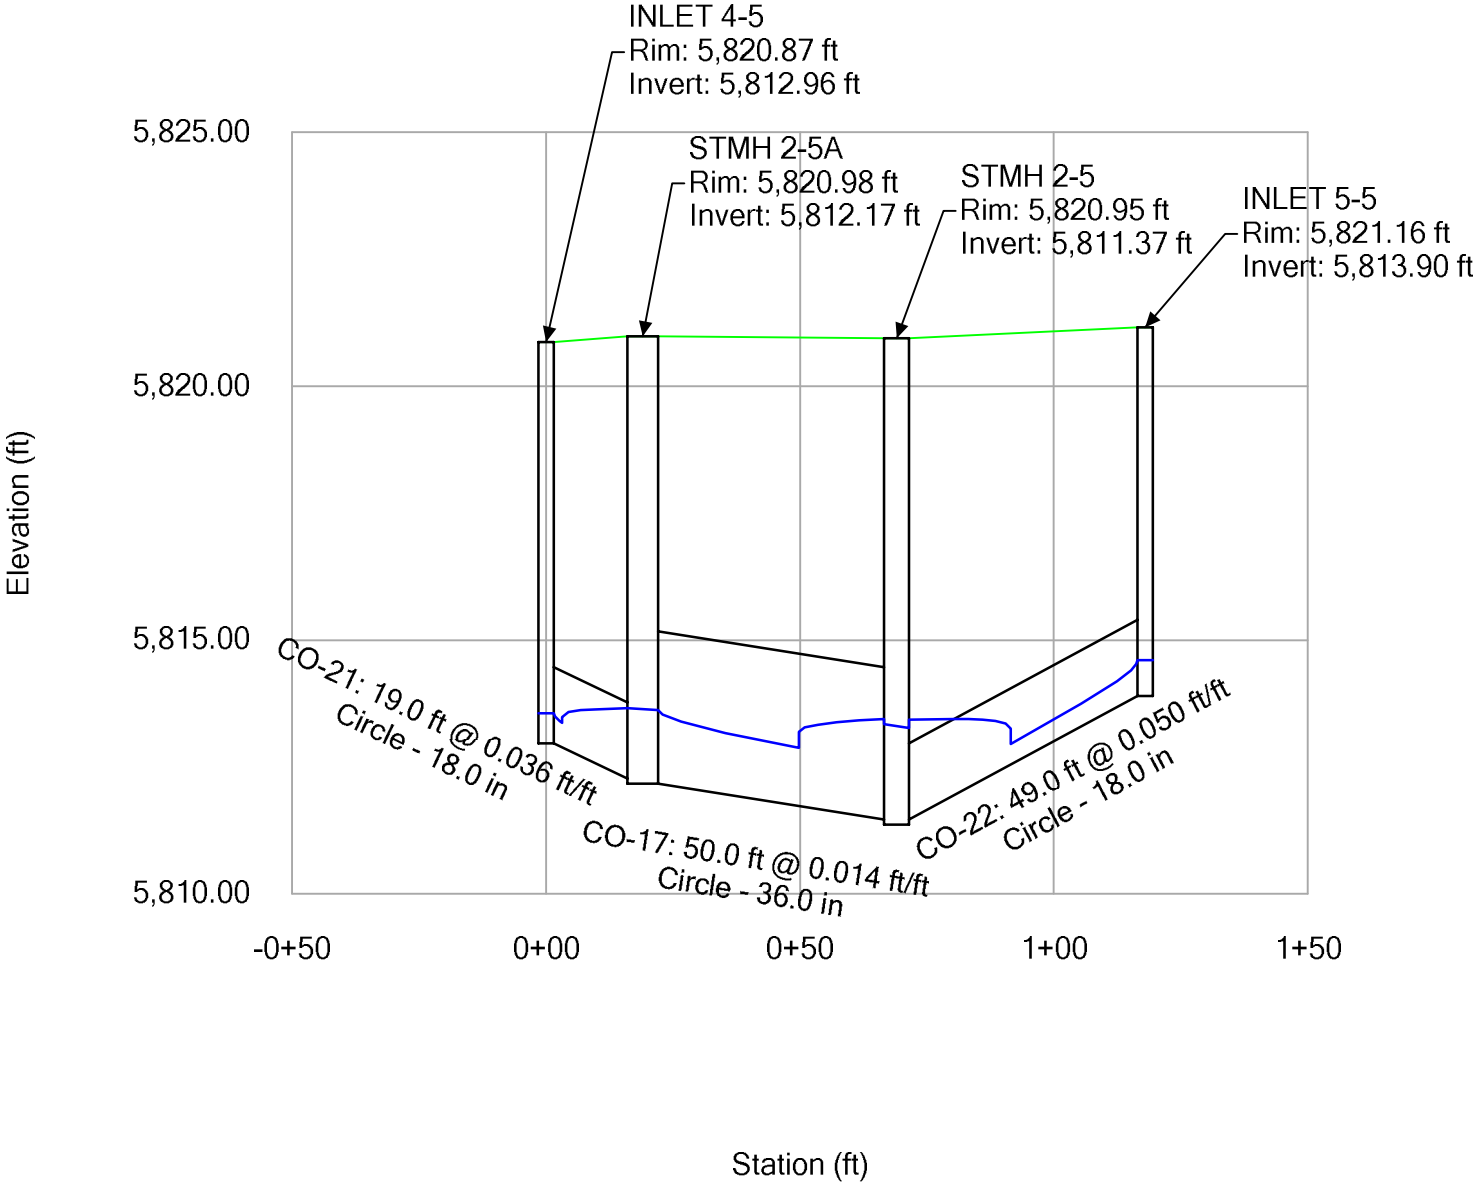


Profile Report
Engineering Profile - Profile - Storm Line 5B (Compark Village South StormCAD [100 year].stsw)

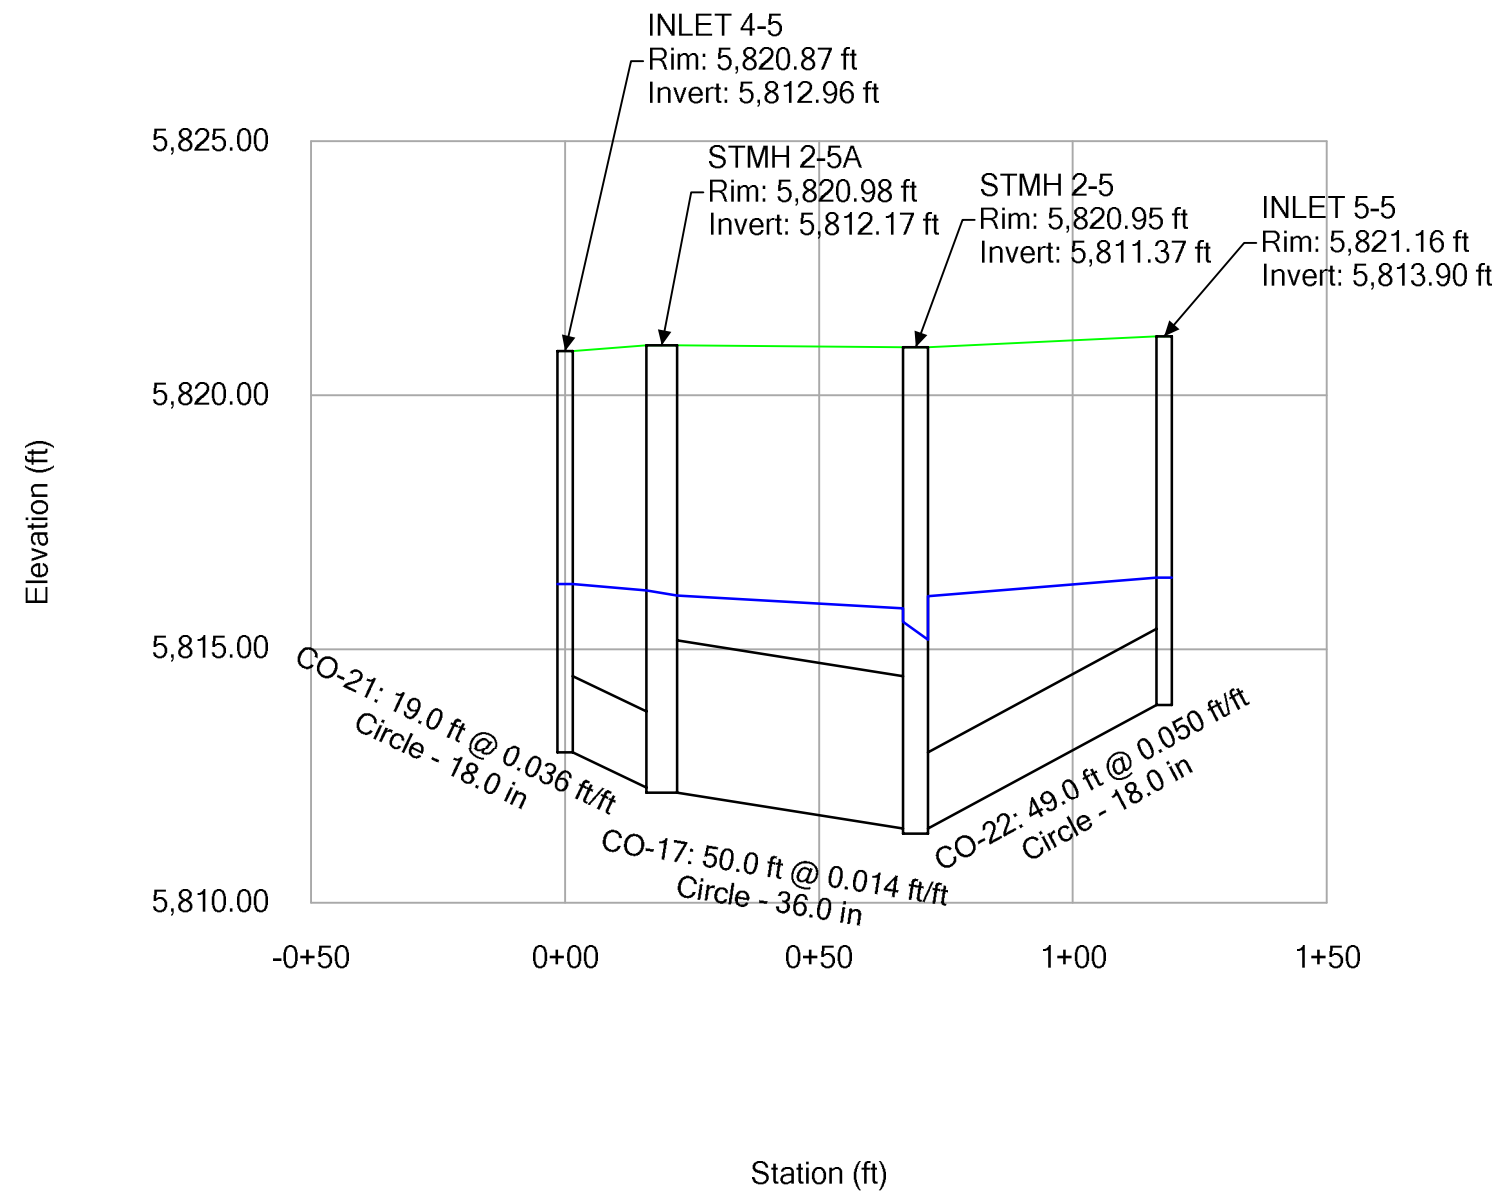


Profile Report
Engineering Profile - Profile - Storm Line 5C (Compark Village South StormCAD [2 year].stsw)

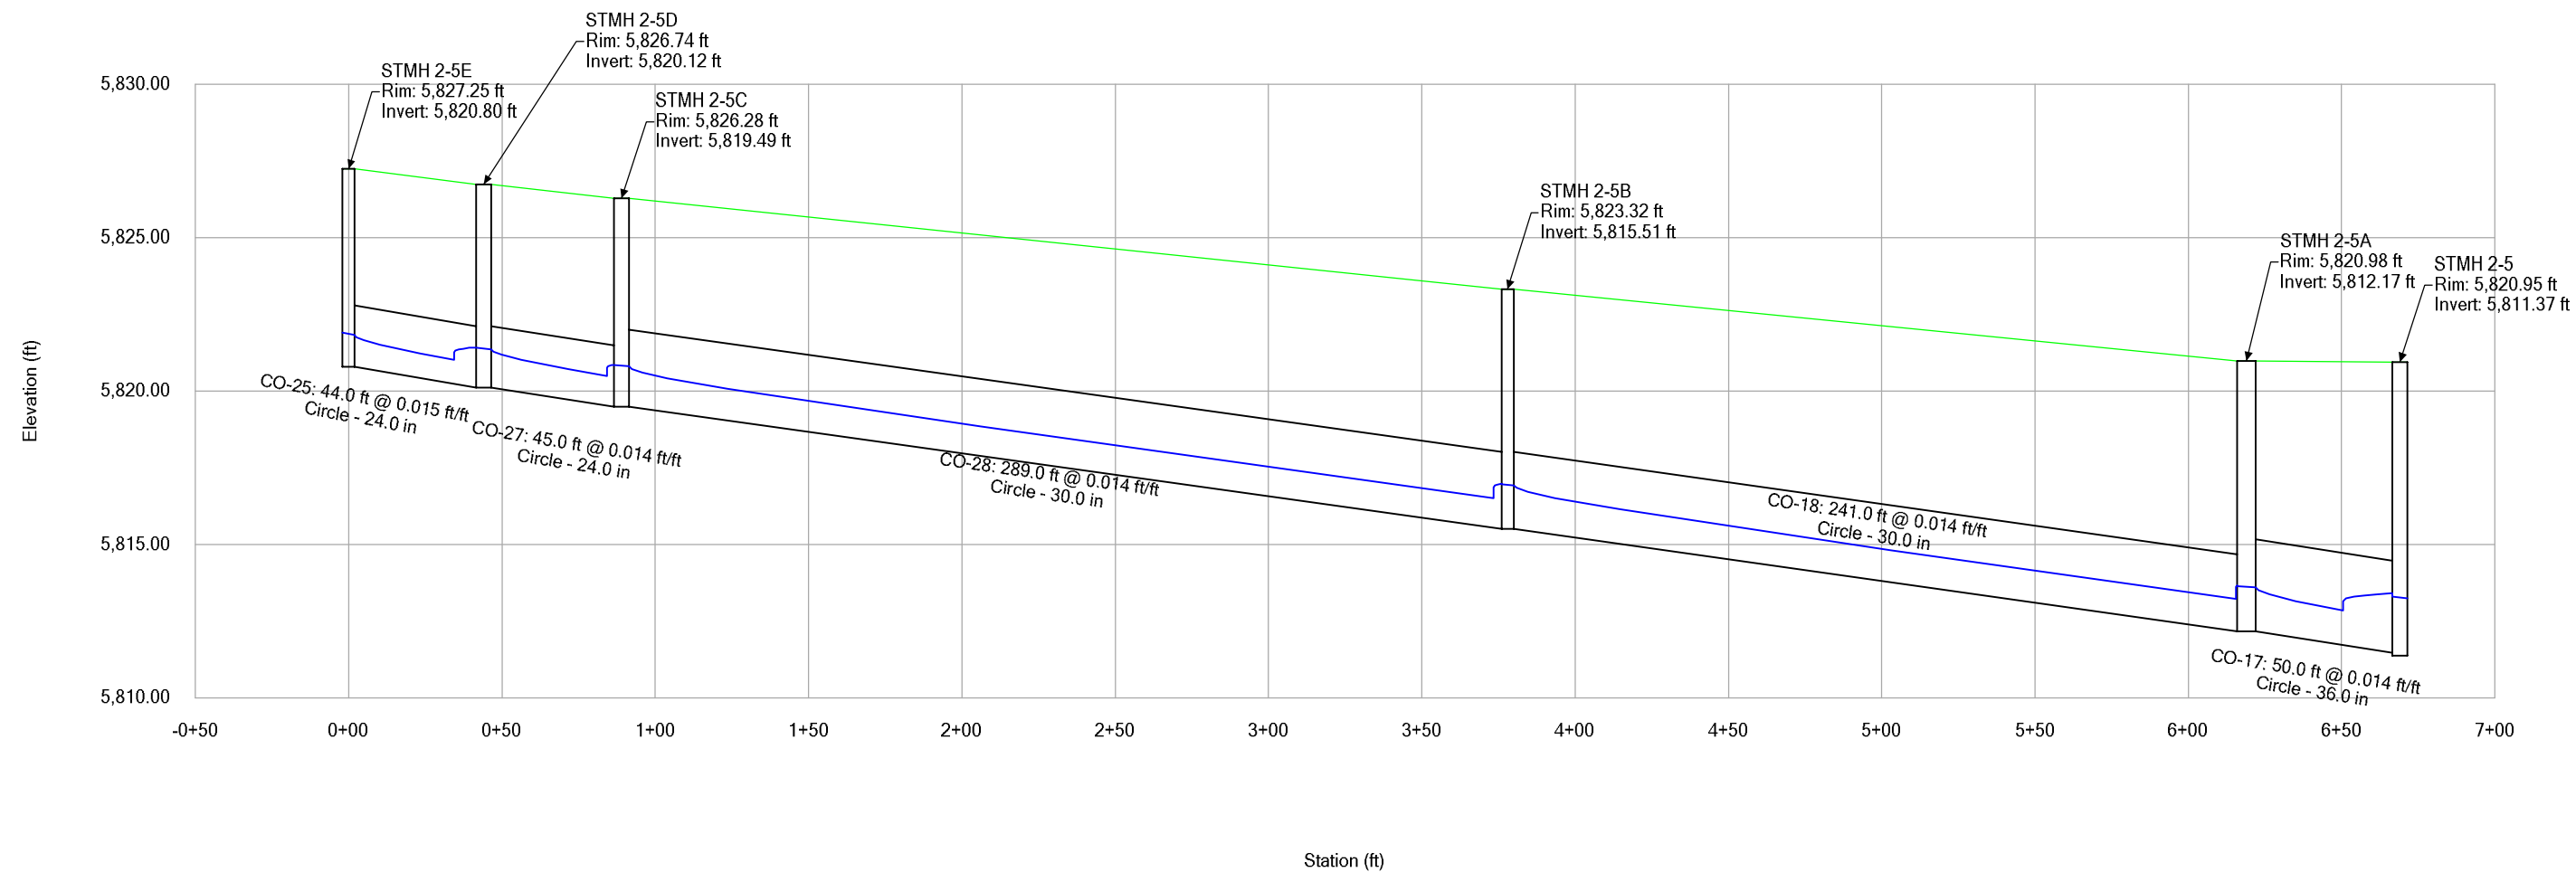


Profile Report
Engineering Profile - Profile - Storm Line 5C (Compark Village South StormCAD [5 year].stsw)

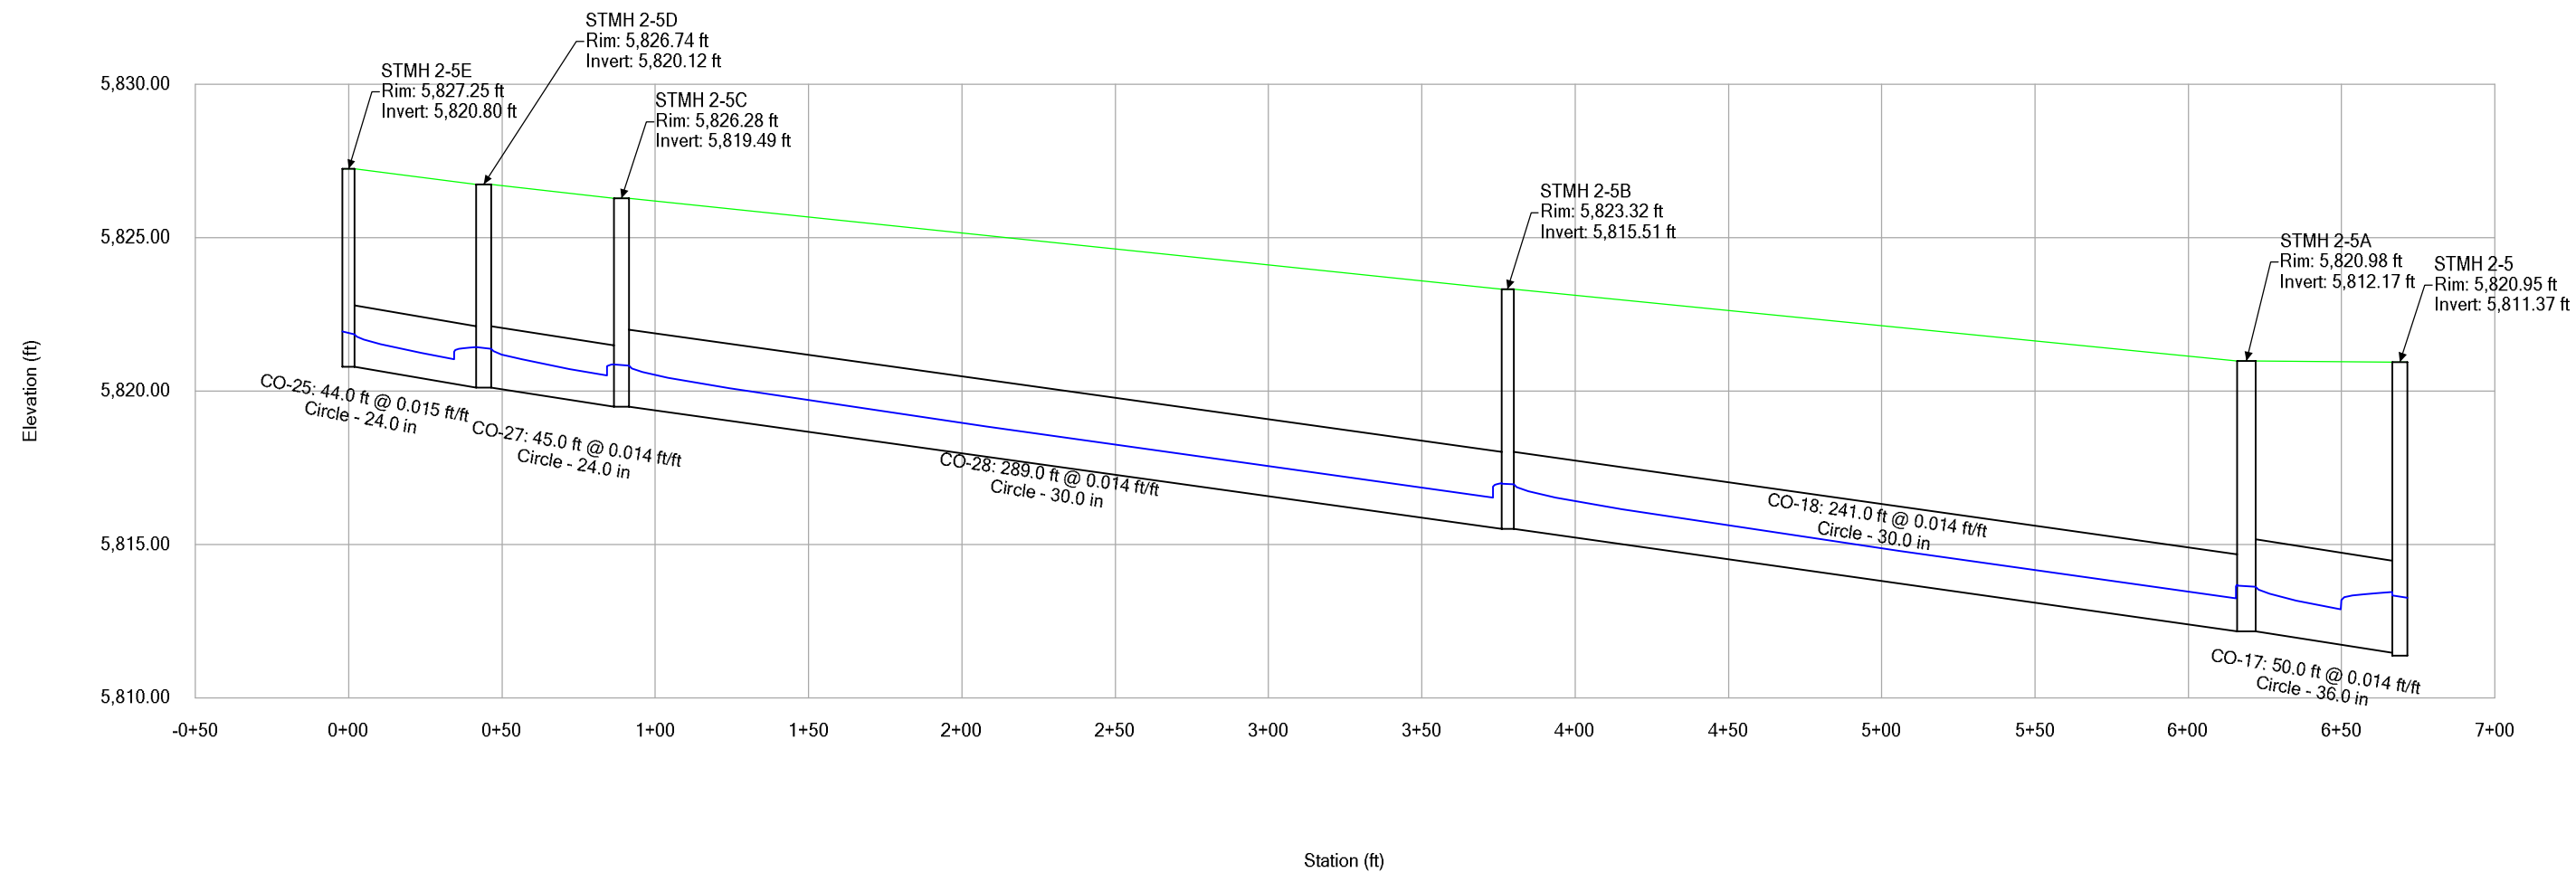


Profile Report
Engineering Profile - Profile - Storm Line 5C (Compark Village South StormCAD [100 year].stsw)

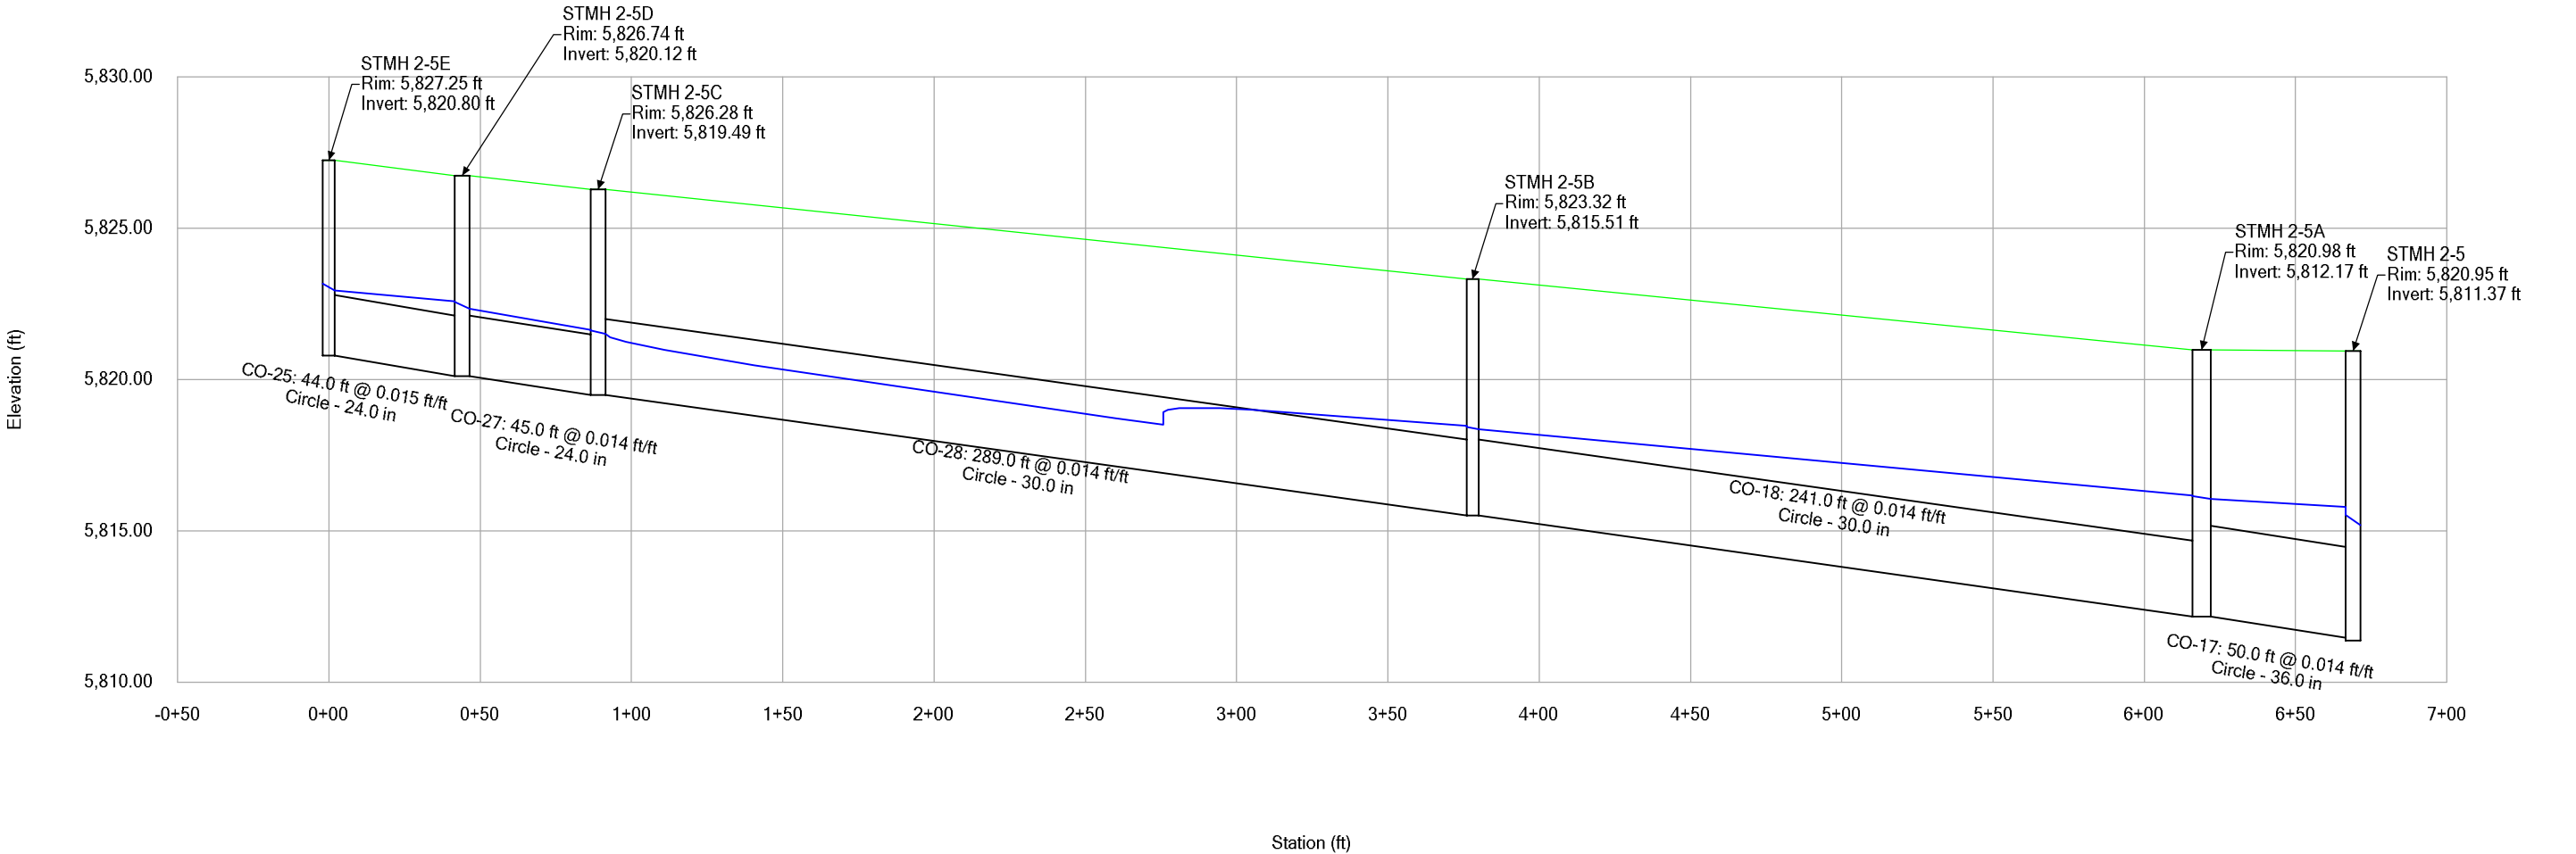


Profile Report
Engineering Profile - Profile - Storm Line 5D (Compark Village South StormCAD [2 year].stsw)

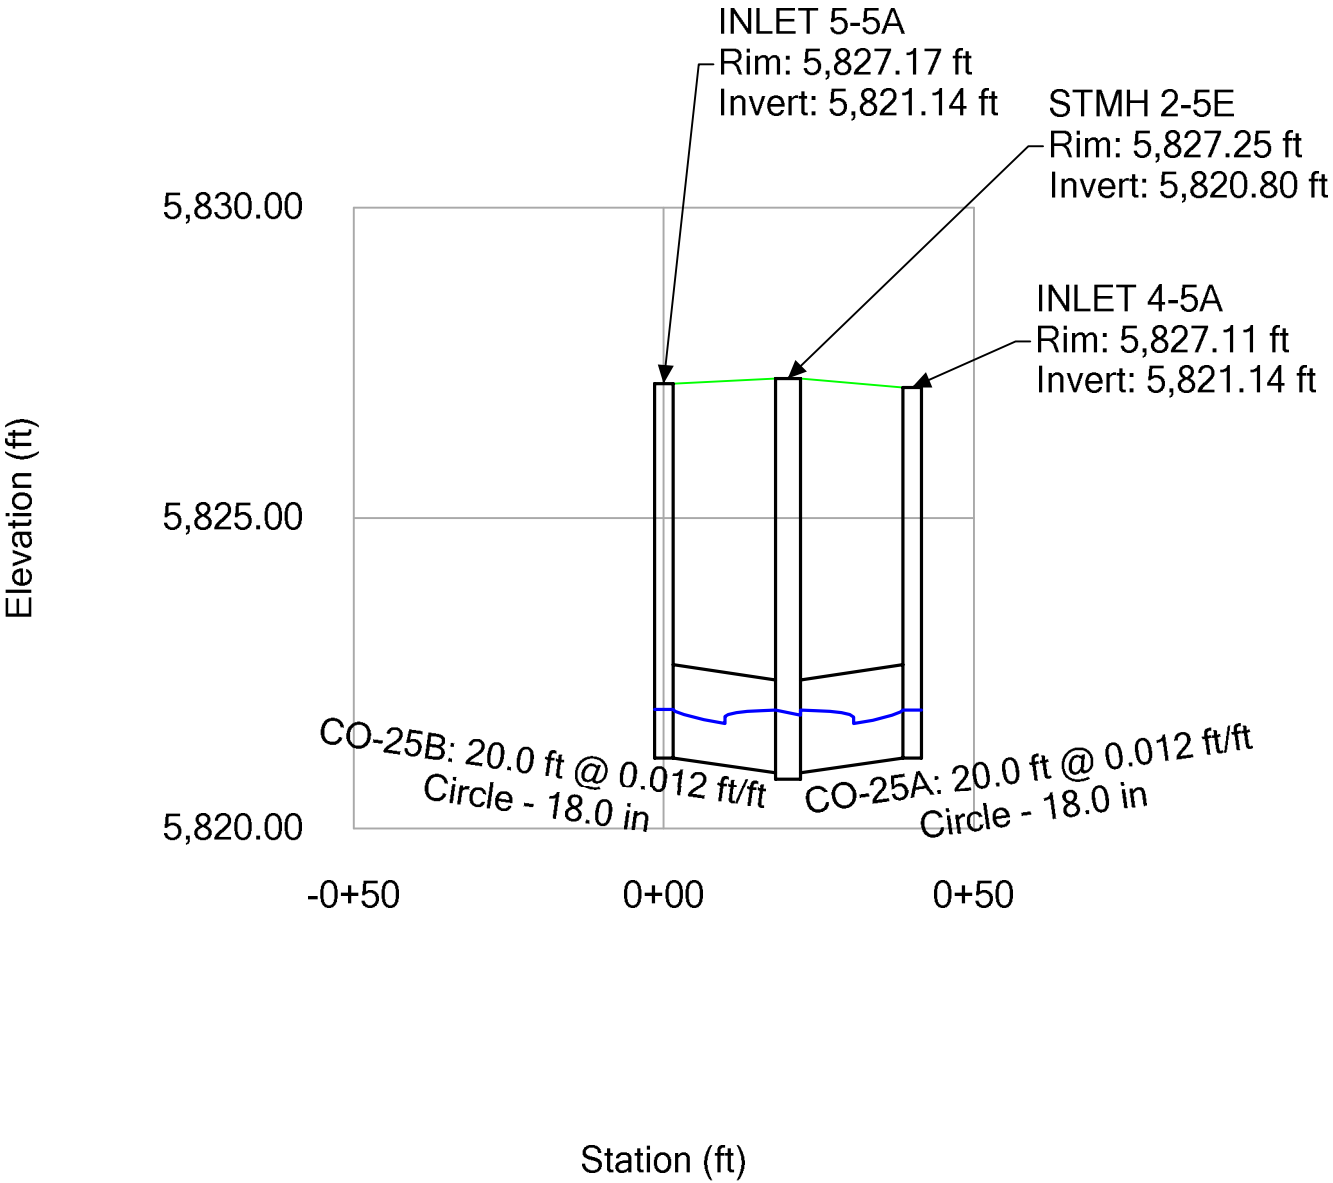


Profile Report
Engineering Profile - Profile - Storm Line 5D (Compark Village South StormCAD [5 year].stsw)

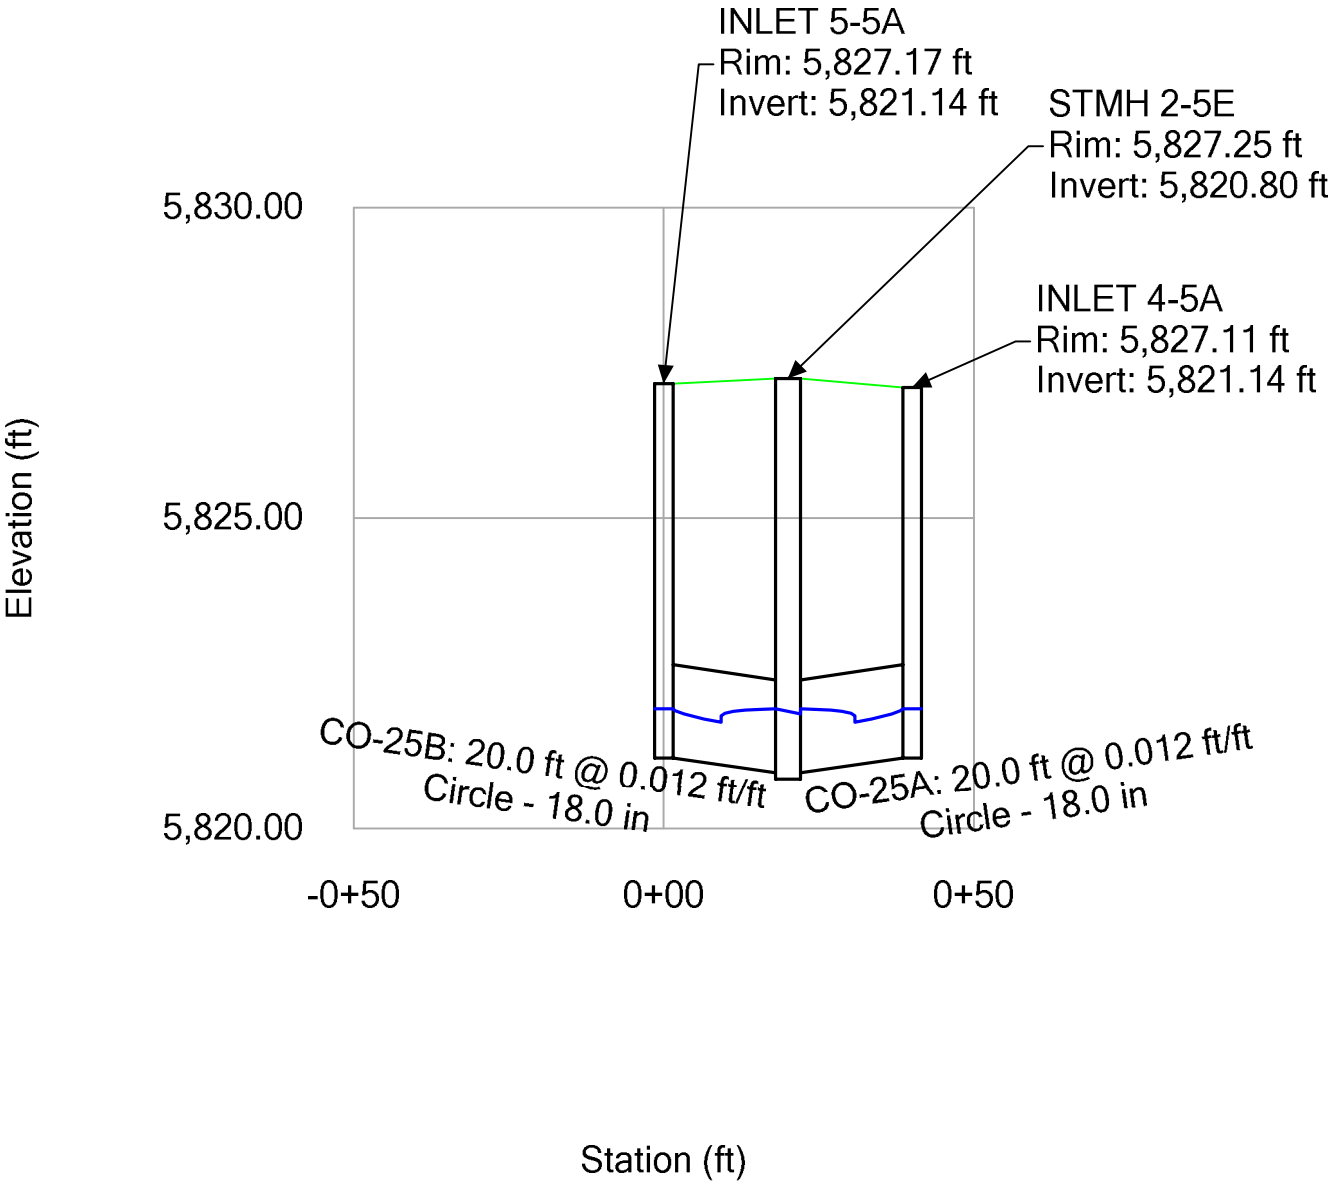


Profile Report
Engineering Profile - Profile - Storm Line 5D (Compark Village South StormCAD [100 year].stsw)

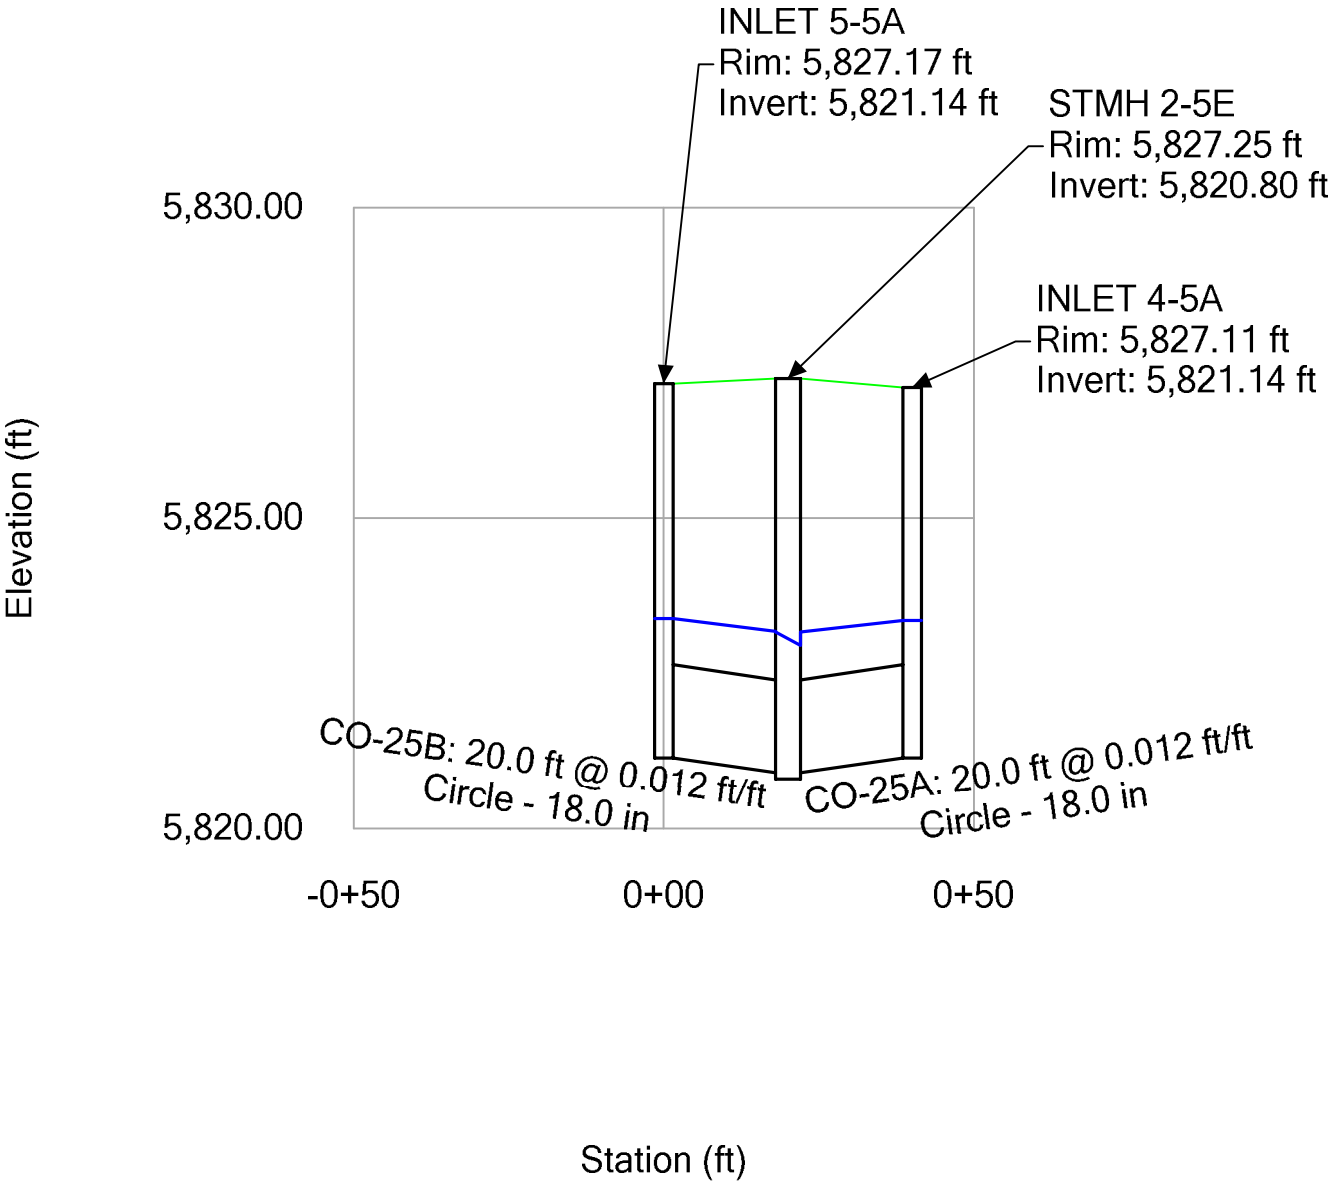


Profile Report
Engineering Profile - Profile - Storm Line 5E (Compark Village South StormCAD [2 year].stsw)

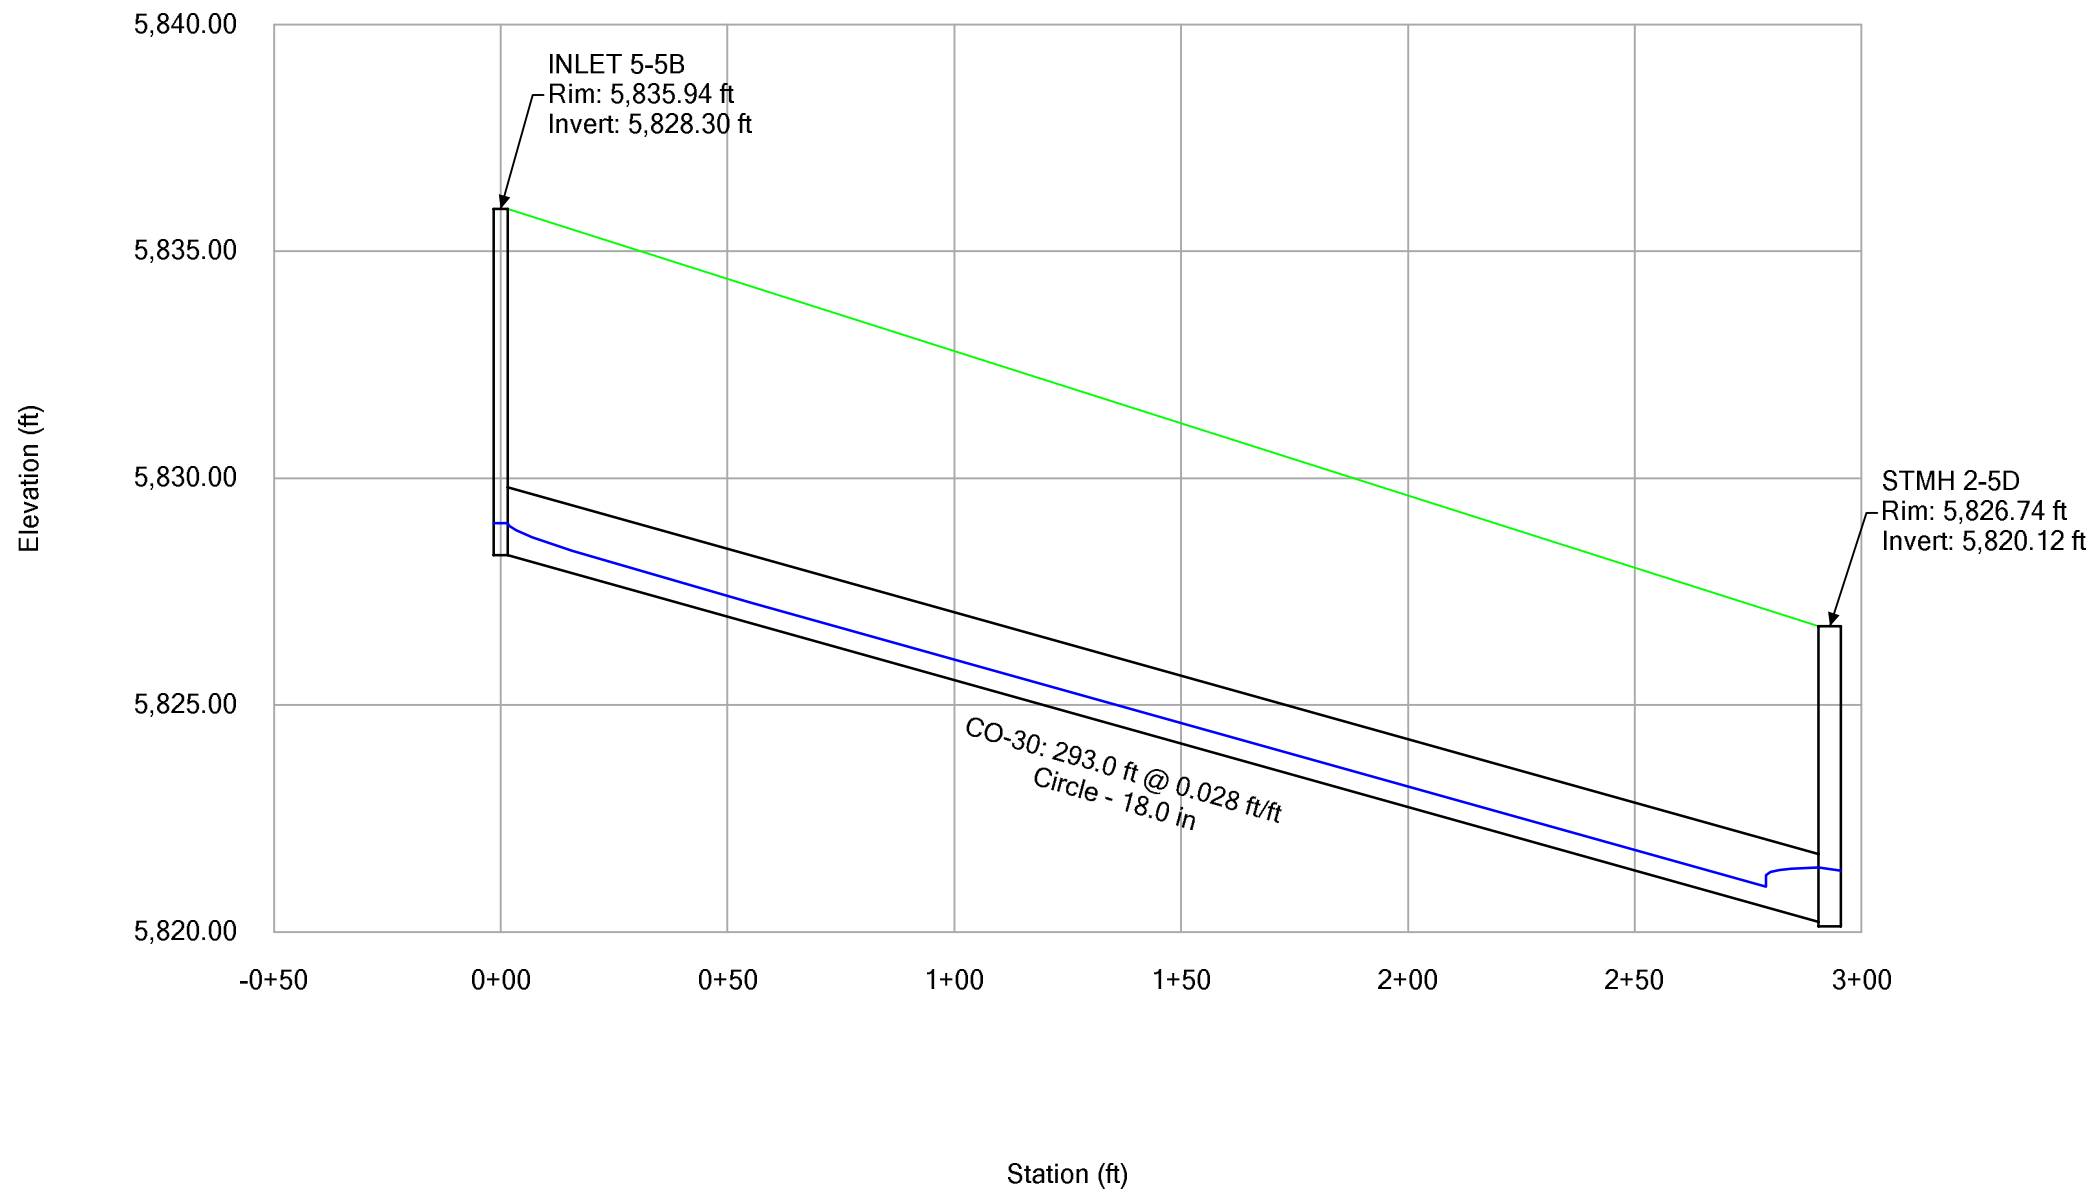


Profile Report
Engineering Profile - Profile - Storm Line 5E (Compark Village South StormCAD [5 year].stsw)

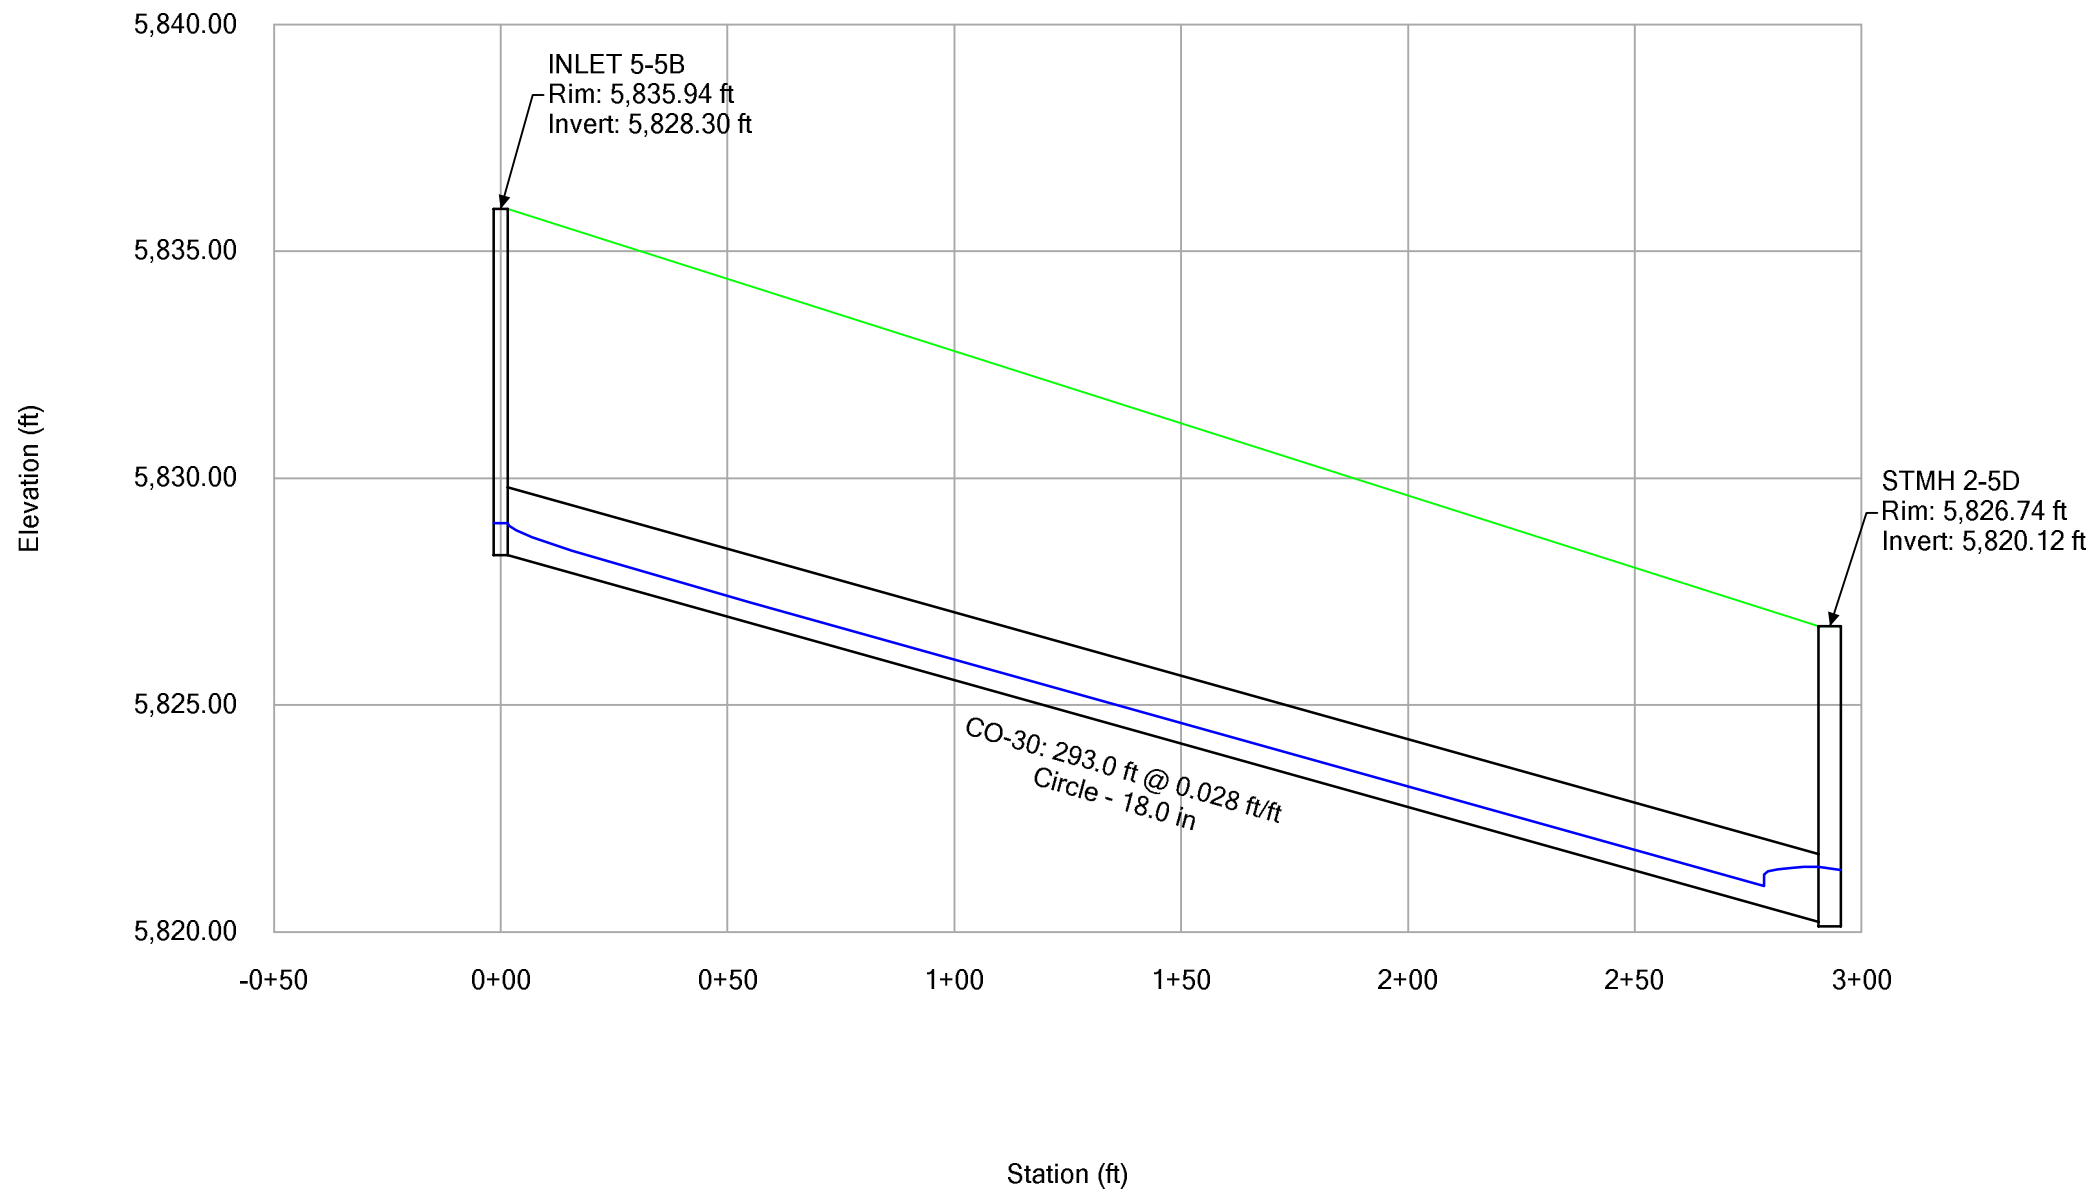


Profile Report
Engineering Profile - Profile - Storm Line 5E (Compark Village South StormCAD [100 year].stsw)

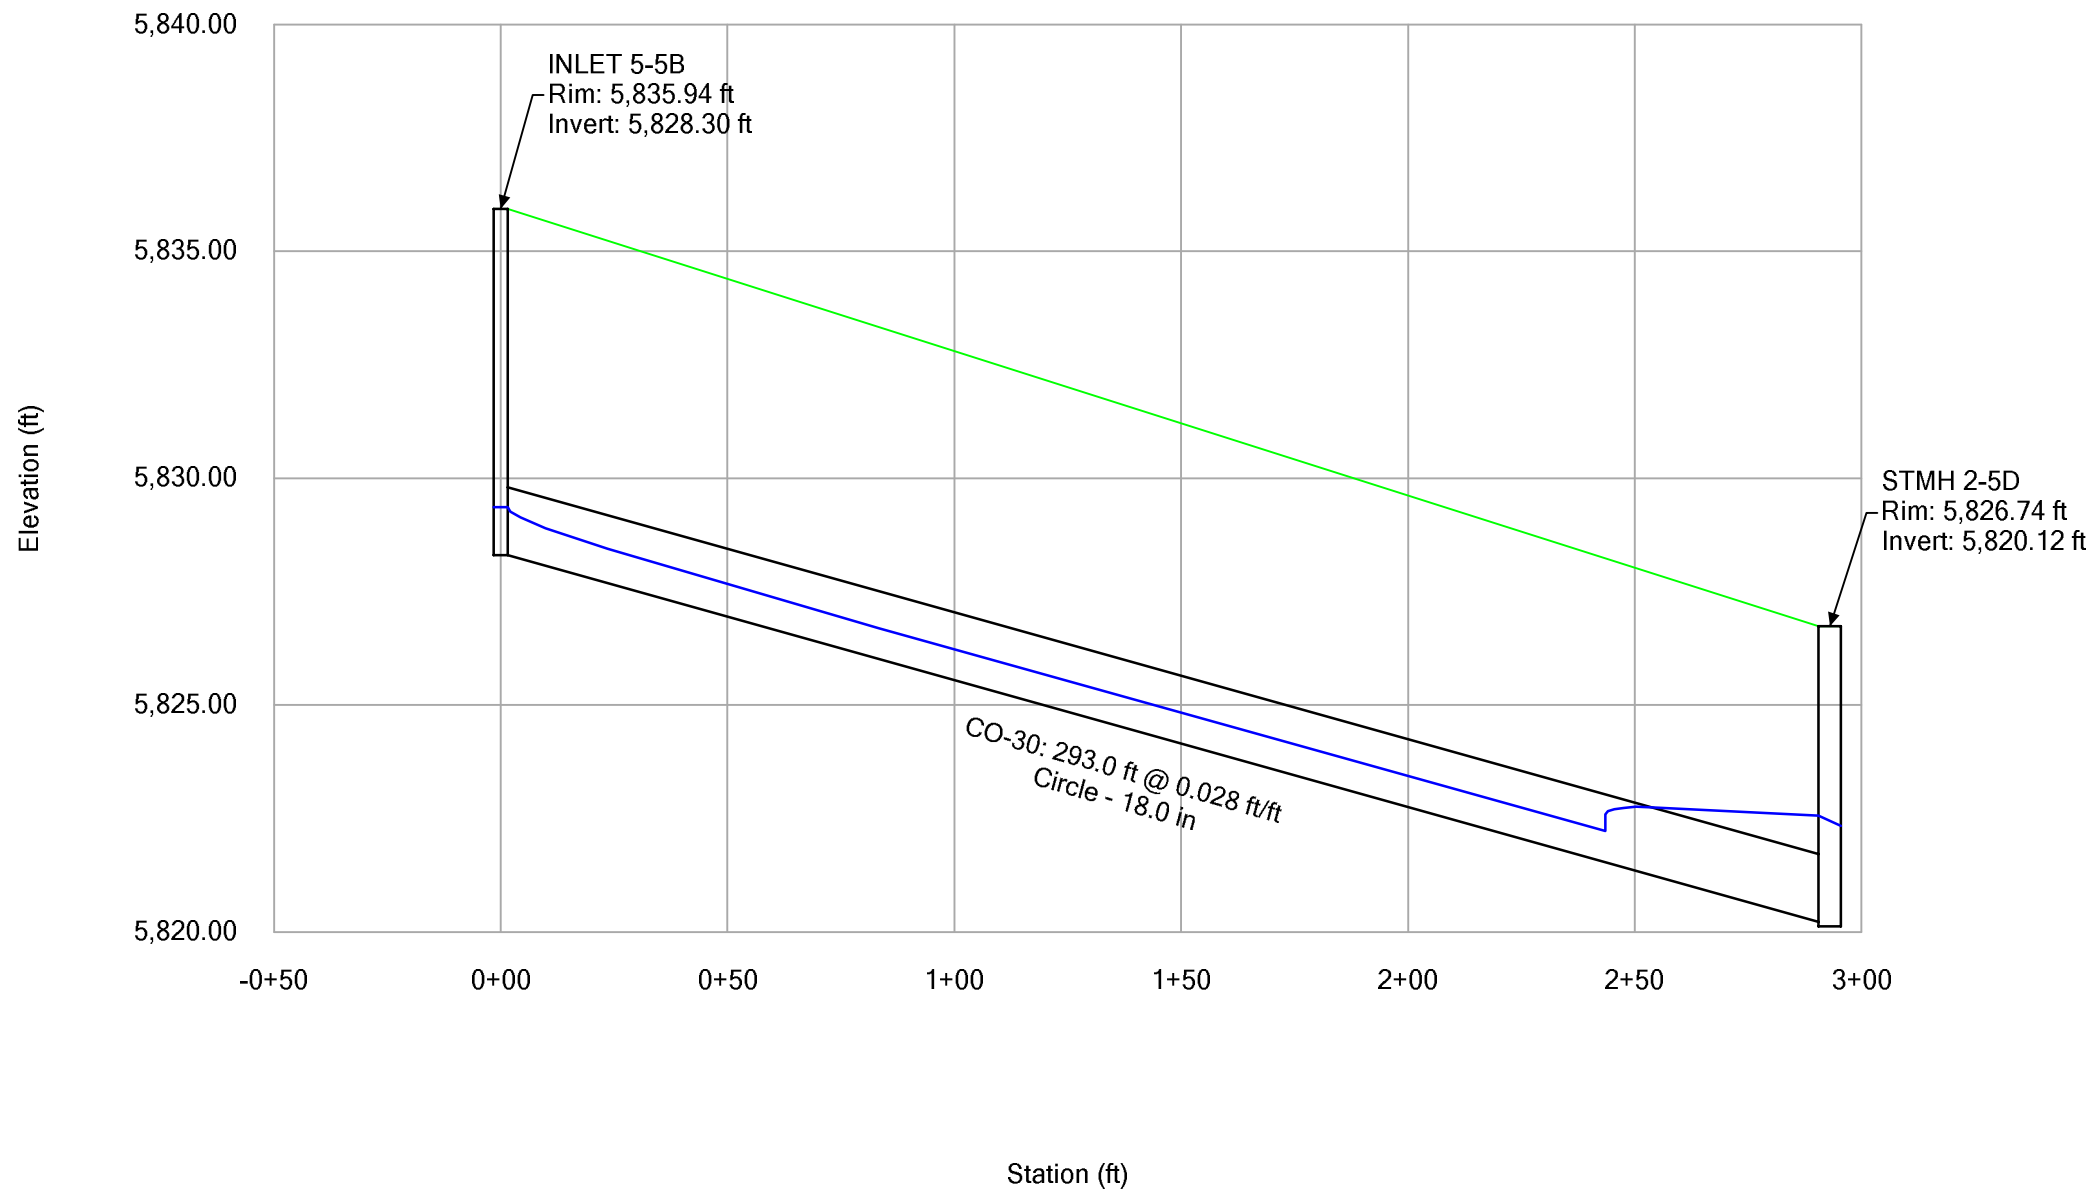


Profile Report
Engineering Profile - Profile - Storm Line 5F (Compark Village South StormCAD [2 year].stsw)

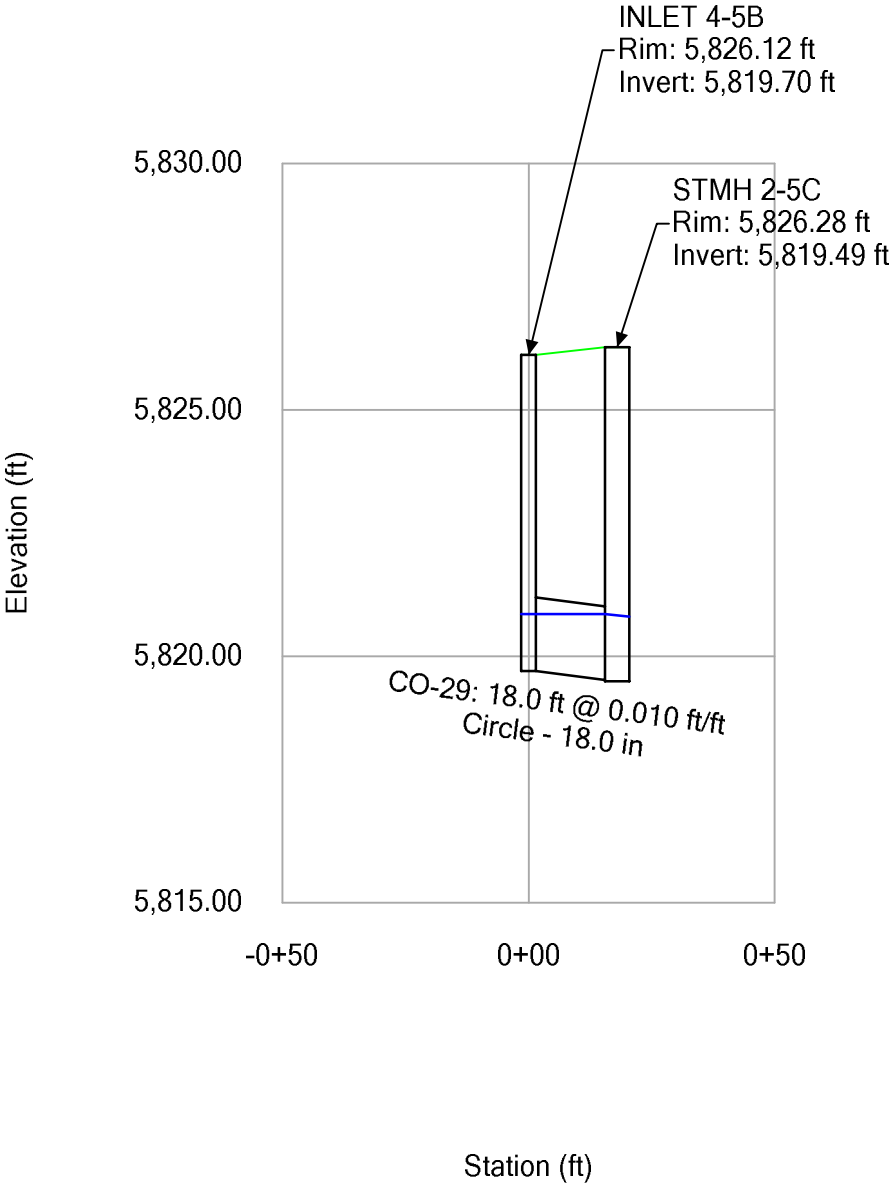


Profile Report
Engineering Profile - Profile - Storm Line 5F (Compark Village South StormCAD [5 year].stsw)

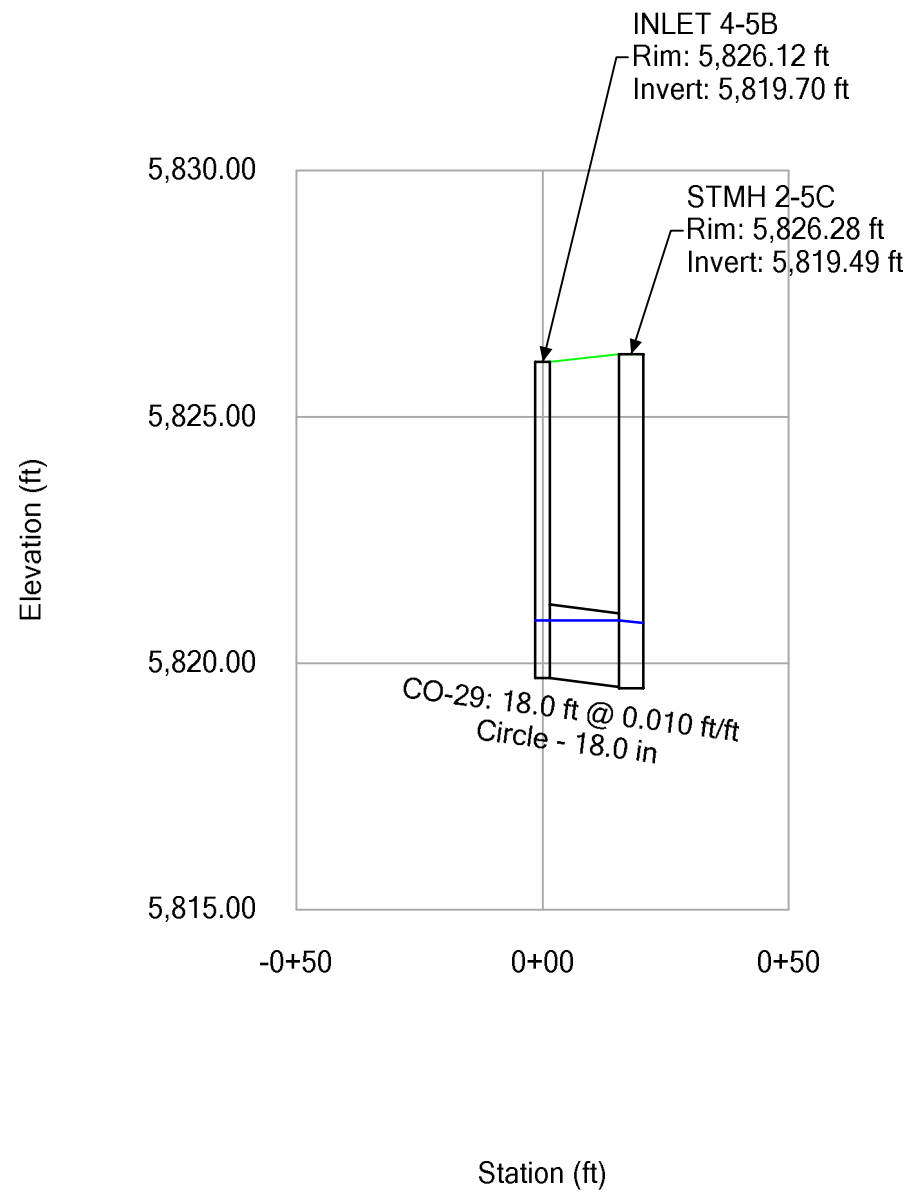


Profile Report
Engineering Profile - Profile - Storm Line 5F (Compark Village South StormCAD [100 year].stsw)

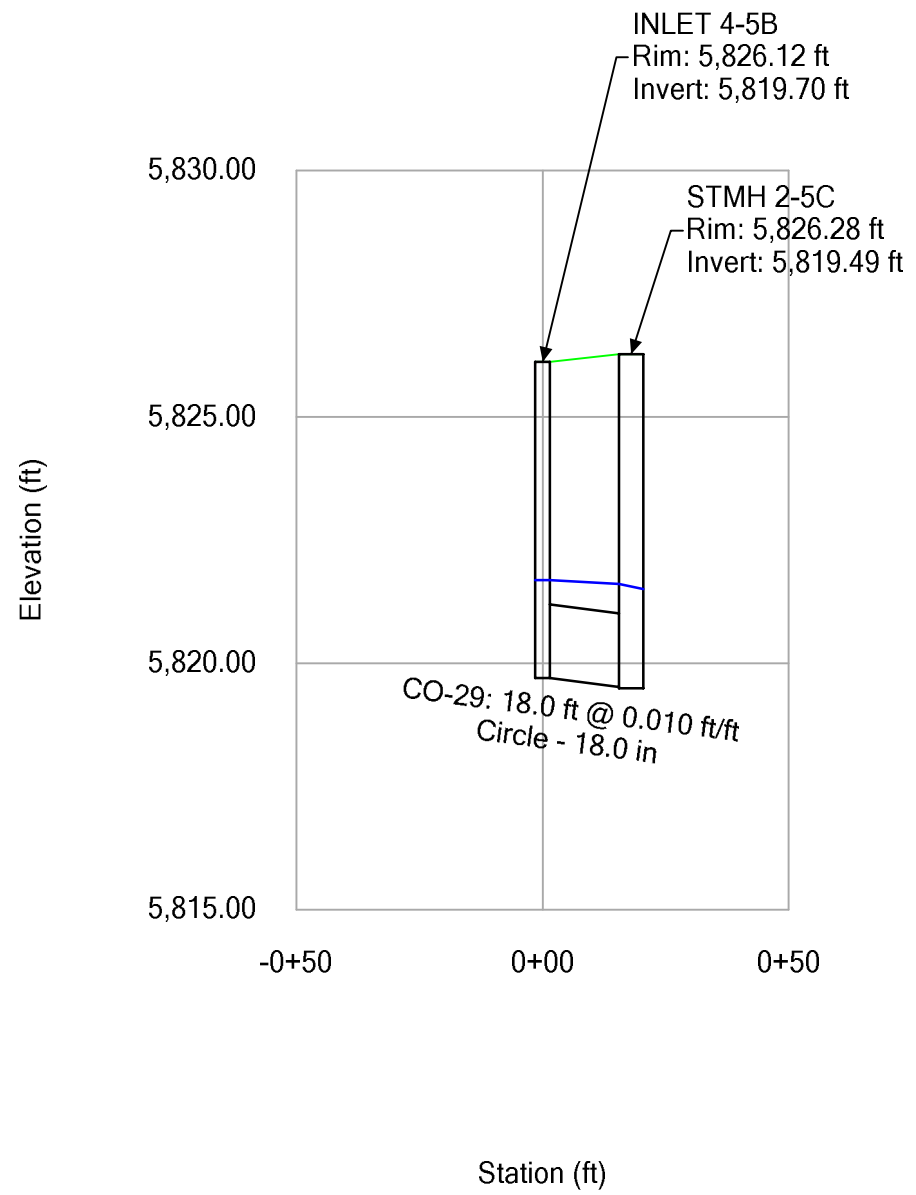


Profile Report
Engineering Profile - Profile - Storm Line 5G (Compark Village South StormCAD [2 year].stsw)

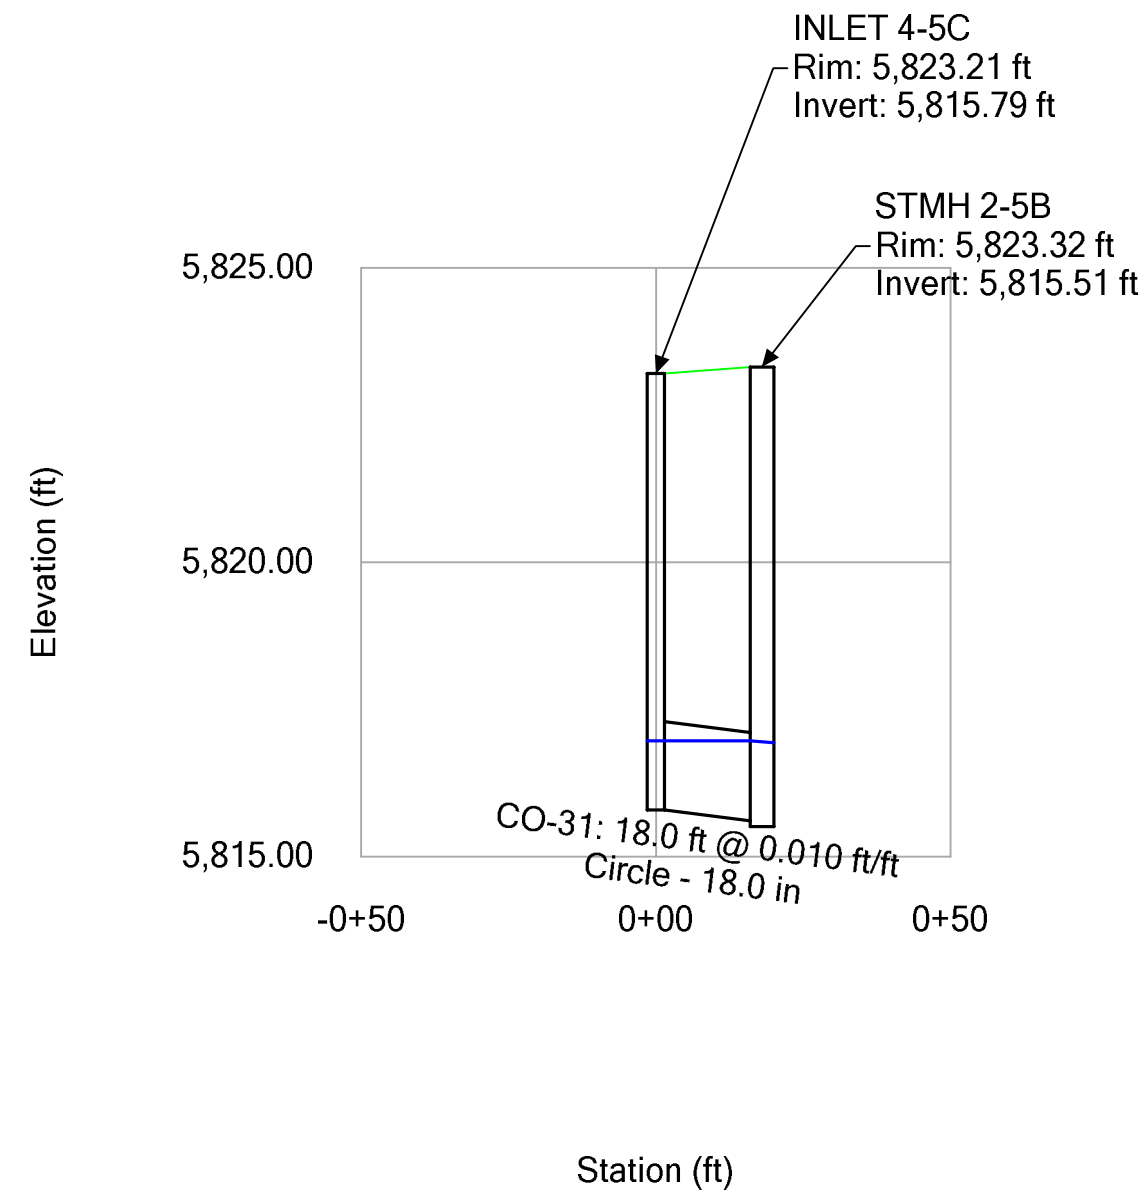


Profile Report
Engineering Profile - Profile - Storm Line 5G (Compark Village South StormCAD [5 year].stsw)

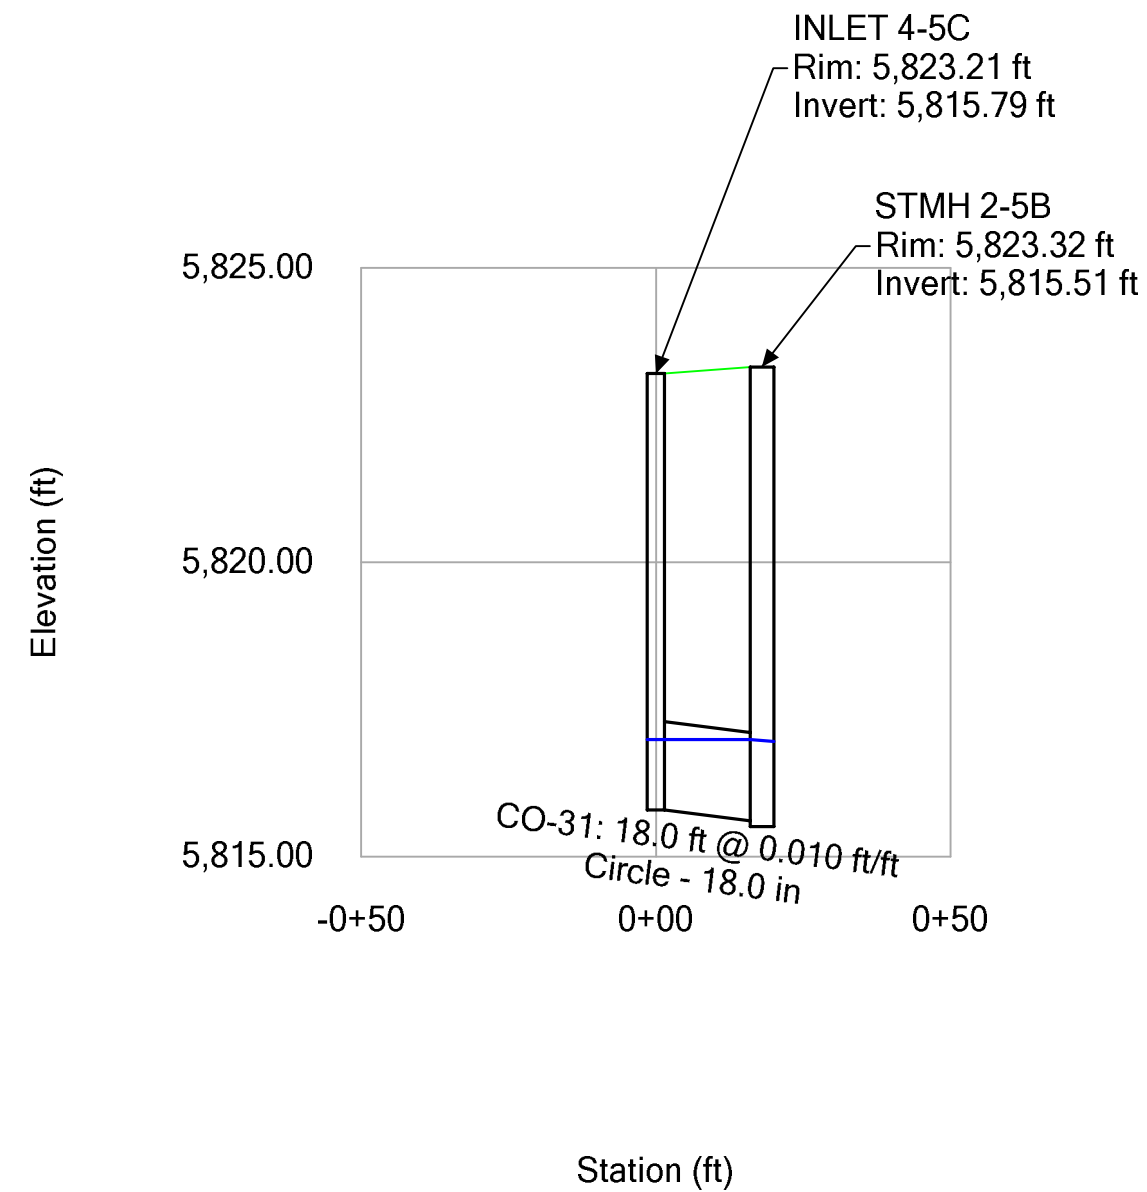


Profile Report
Engineering Profile - Profile - Storm Line 5G (Compark Village South StormCAD [100 year].stsw)

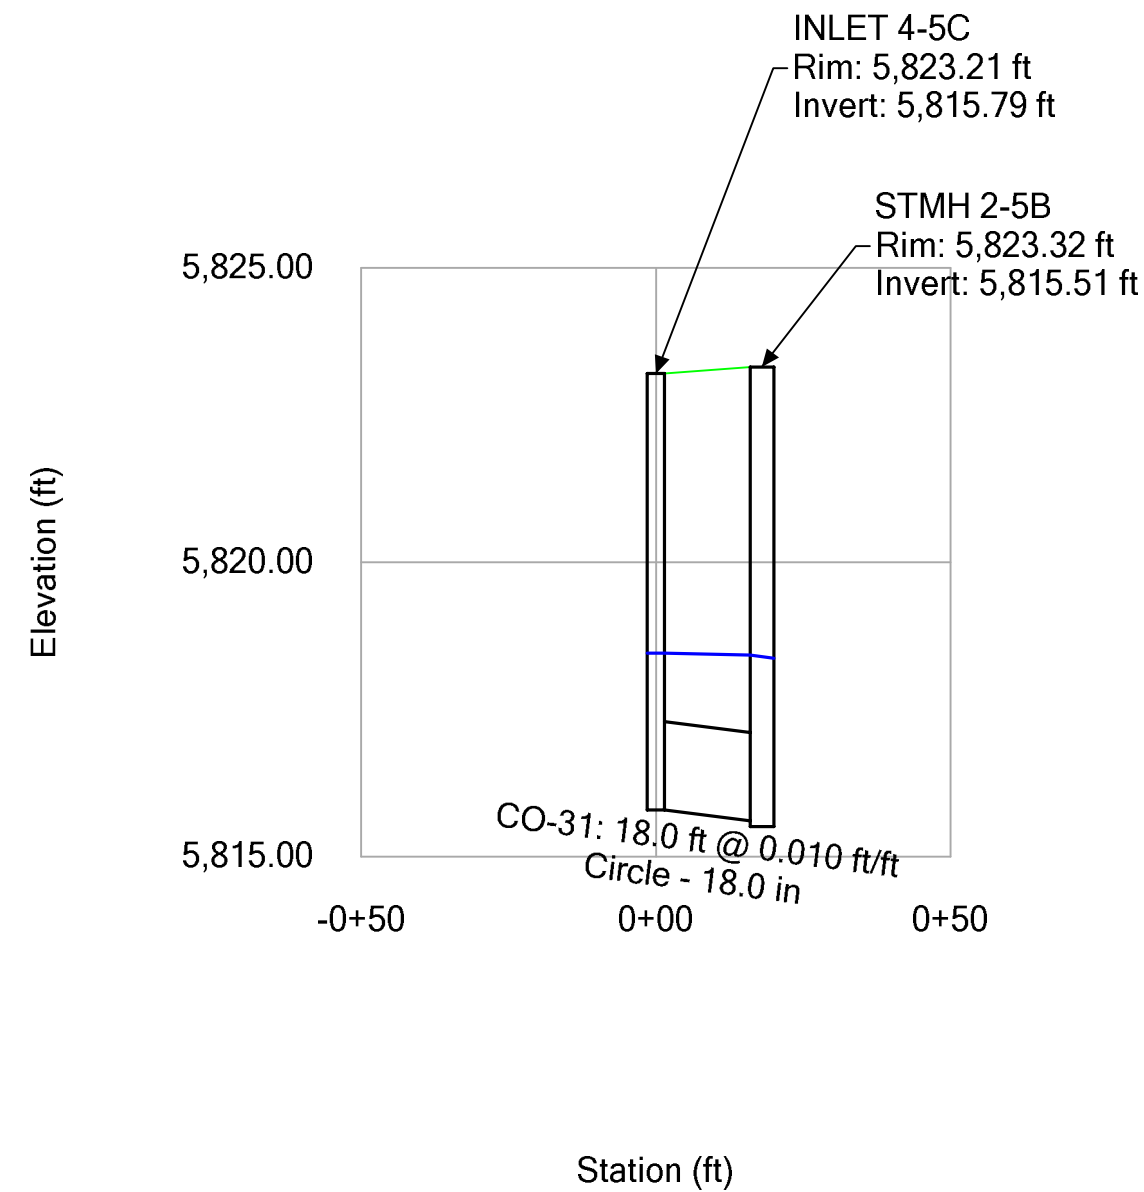


Profile Report
Engineering Profile - Profile - Storm Line 5H (Compark Village South StormCAD [2 year].stsw)

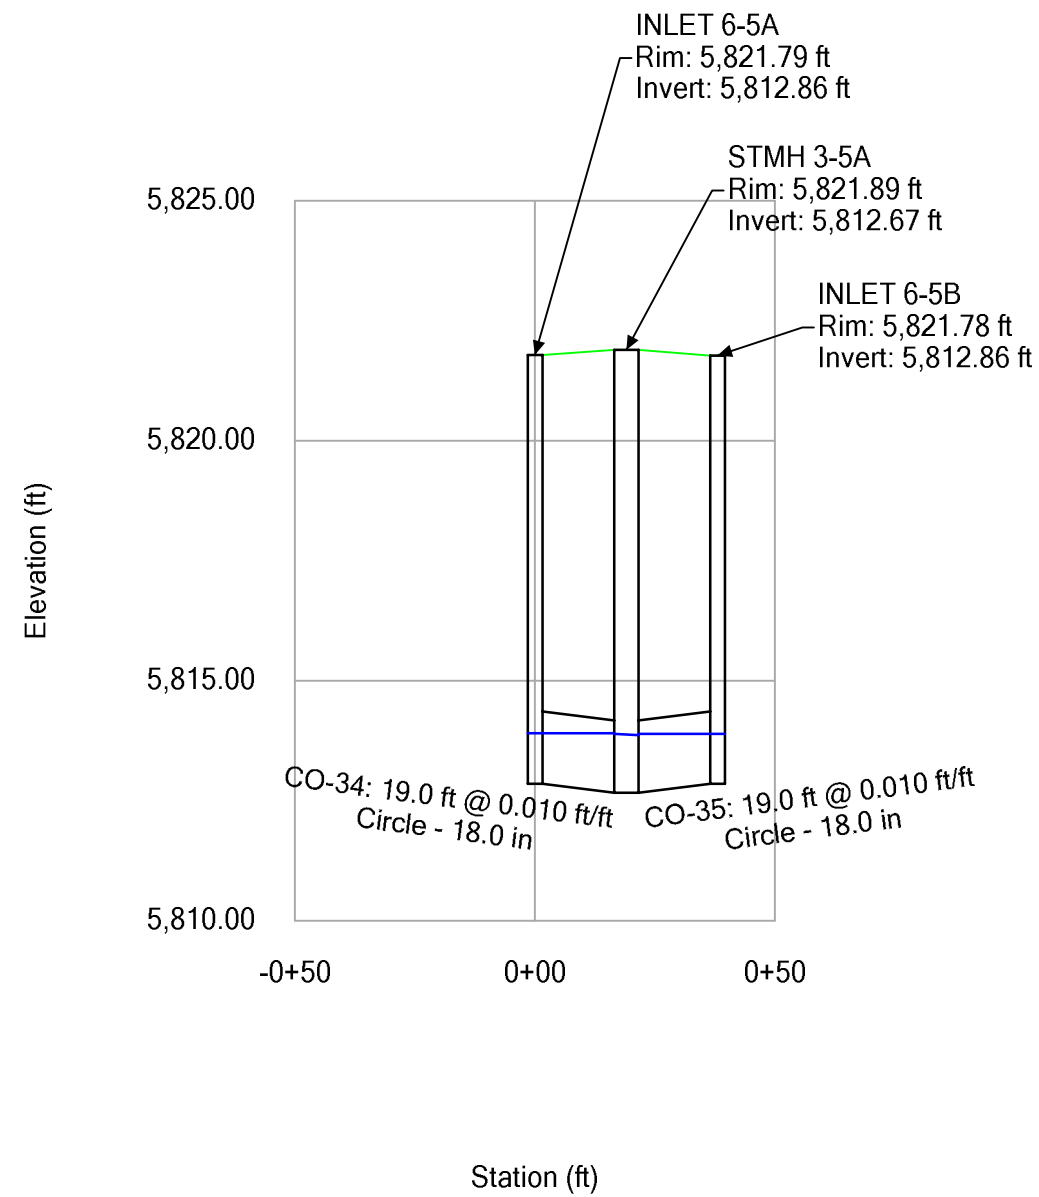


Profile Report
Engineering Profile - Profile - Storm Line 5H (Compark Village South StormCAD [5 year].stsw)

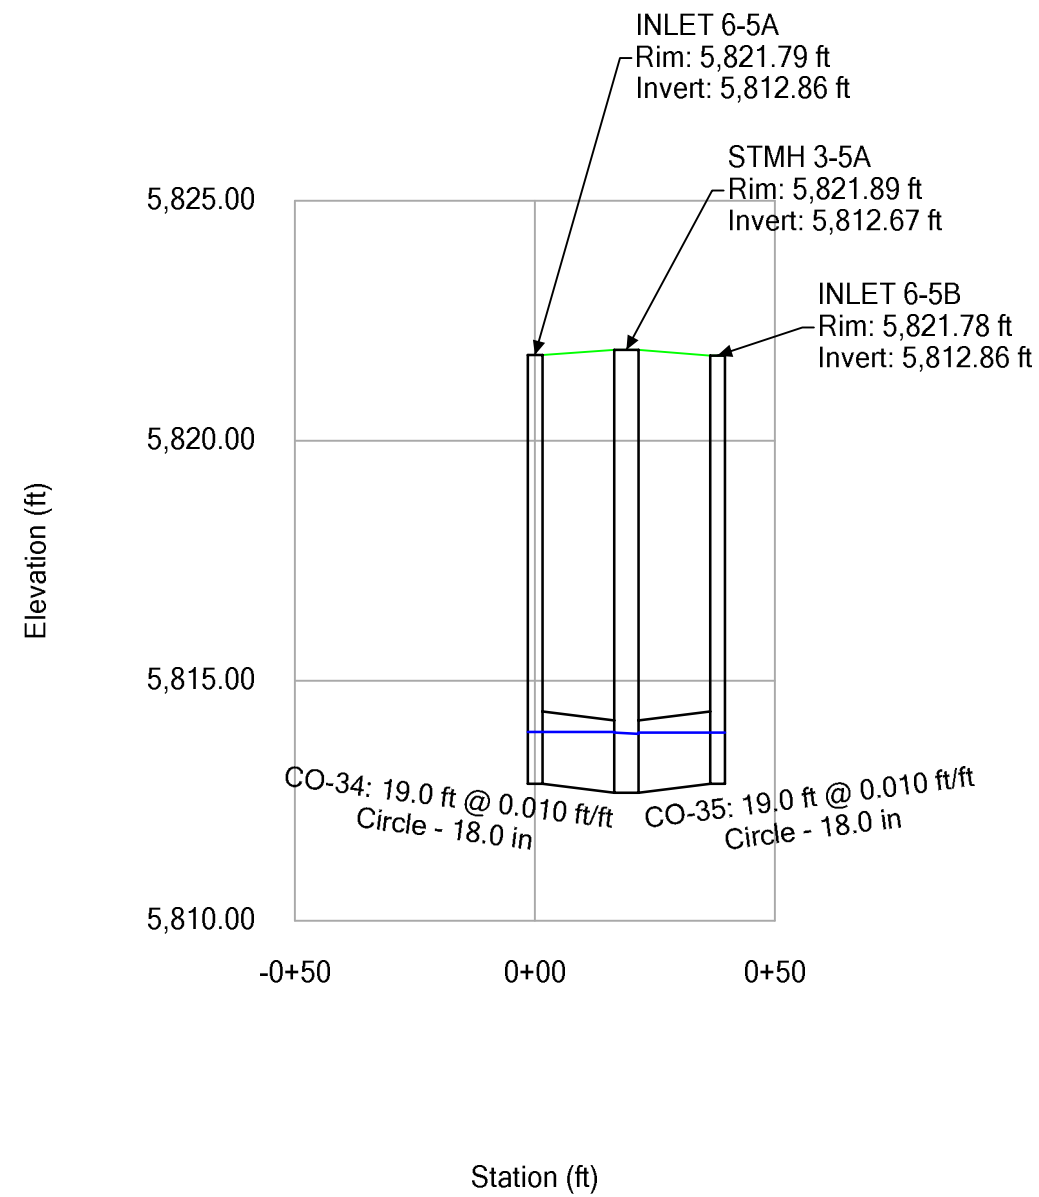

Profile Report
Engineering Profile - Profile - Storm Line 5H (Compark Village South StormCAD [100 year].stsw)

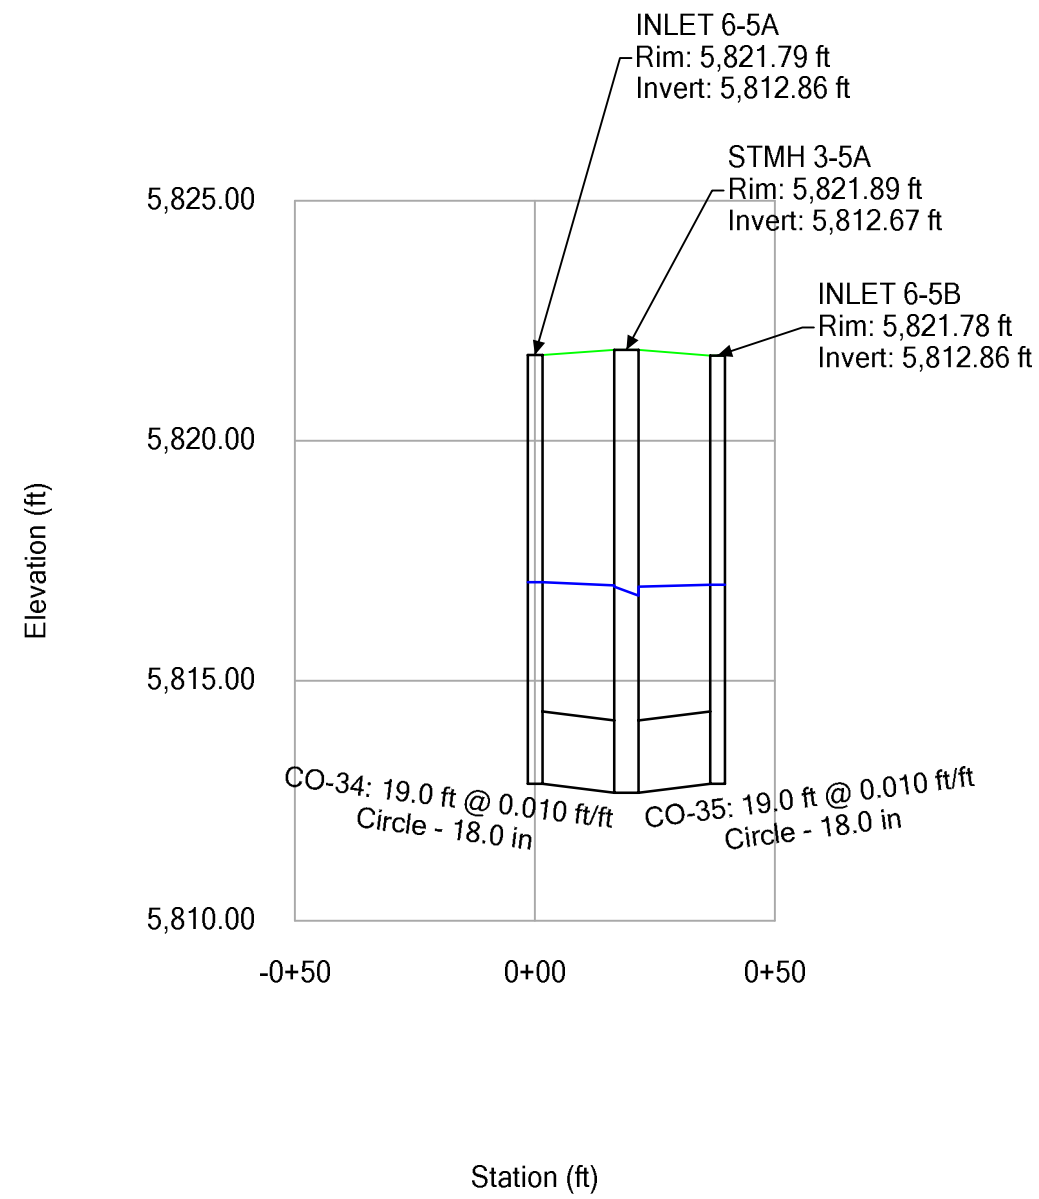


Profile Report
Engineering Profile - Profile - Storm 9 (072020 Compark Village South StormCAD [2 year].stsw)

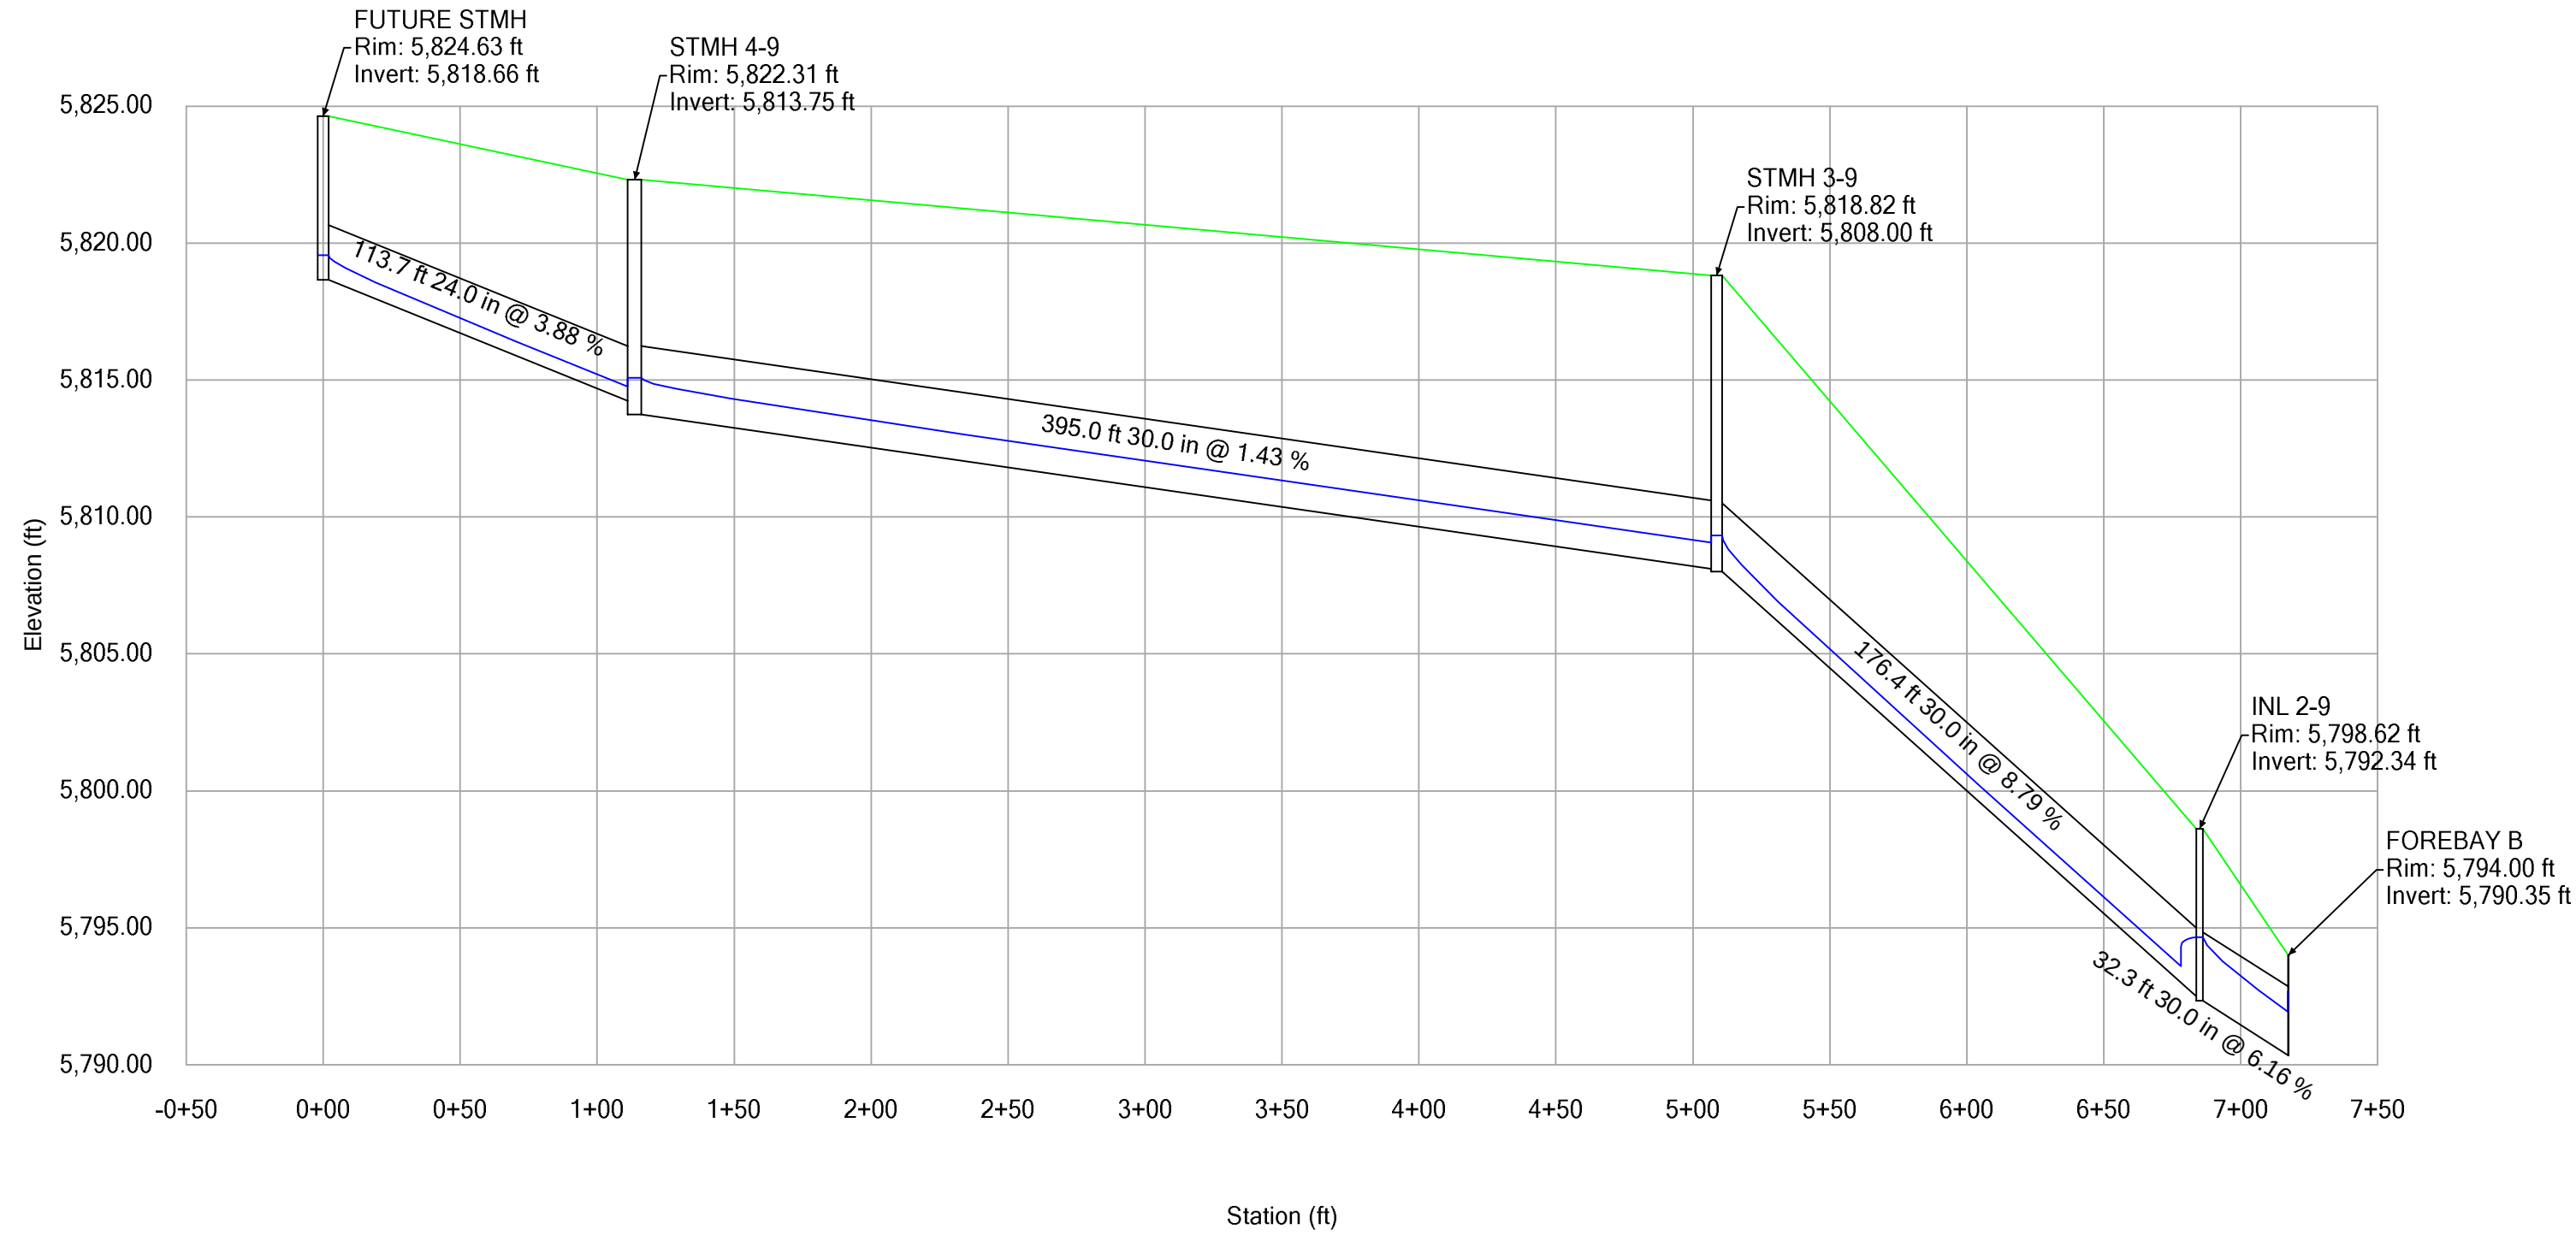


Profile Report

Engineering Profile - Profile - Storm Line 9 (072020 Compark Village South StormCAD [5 year].stsw)

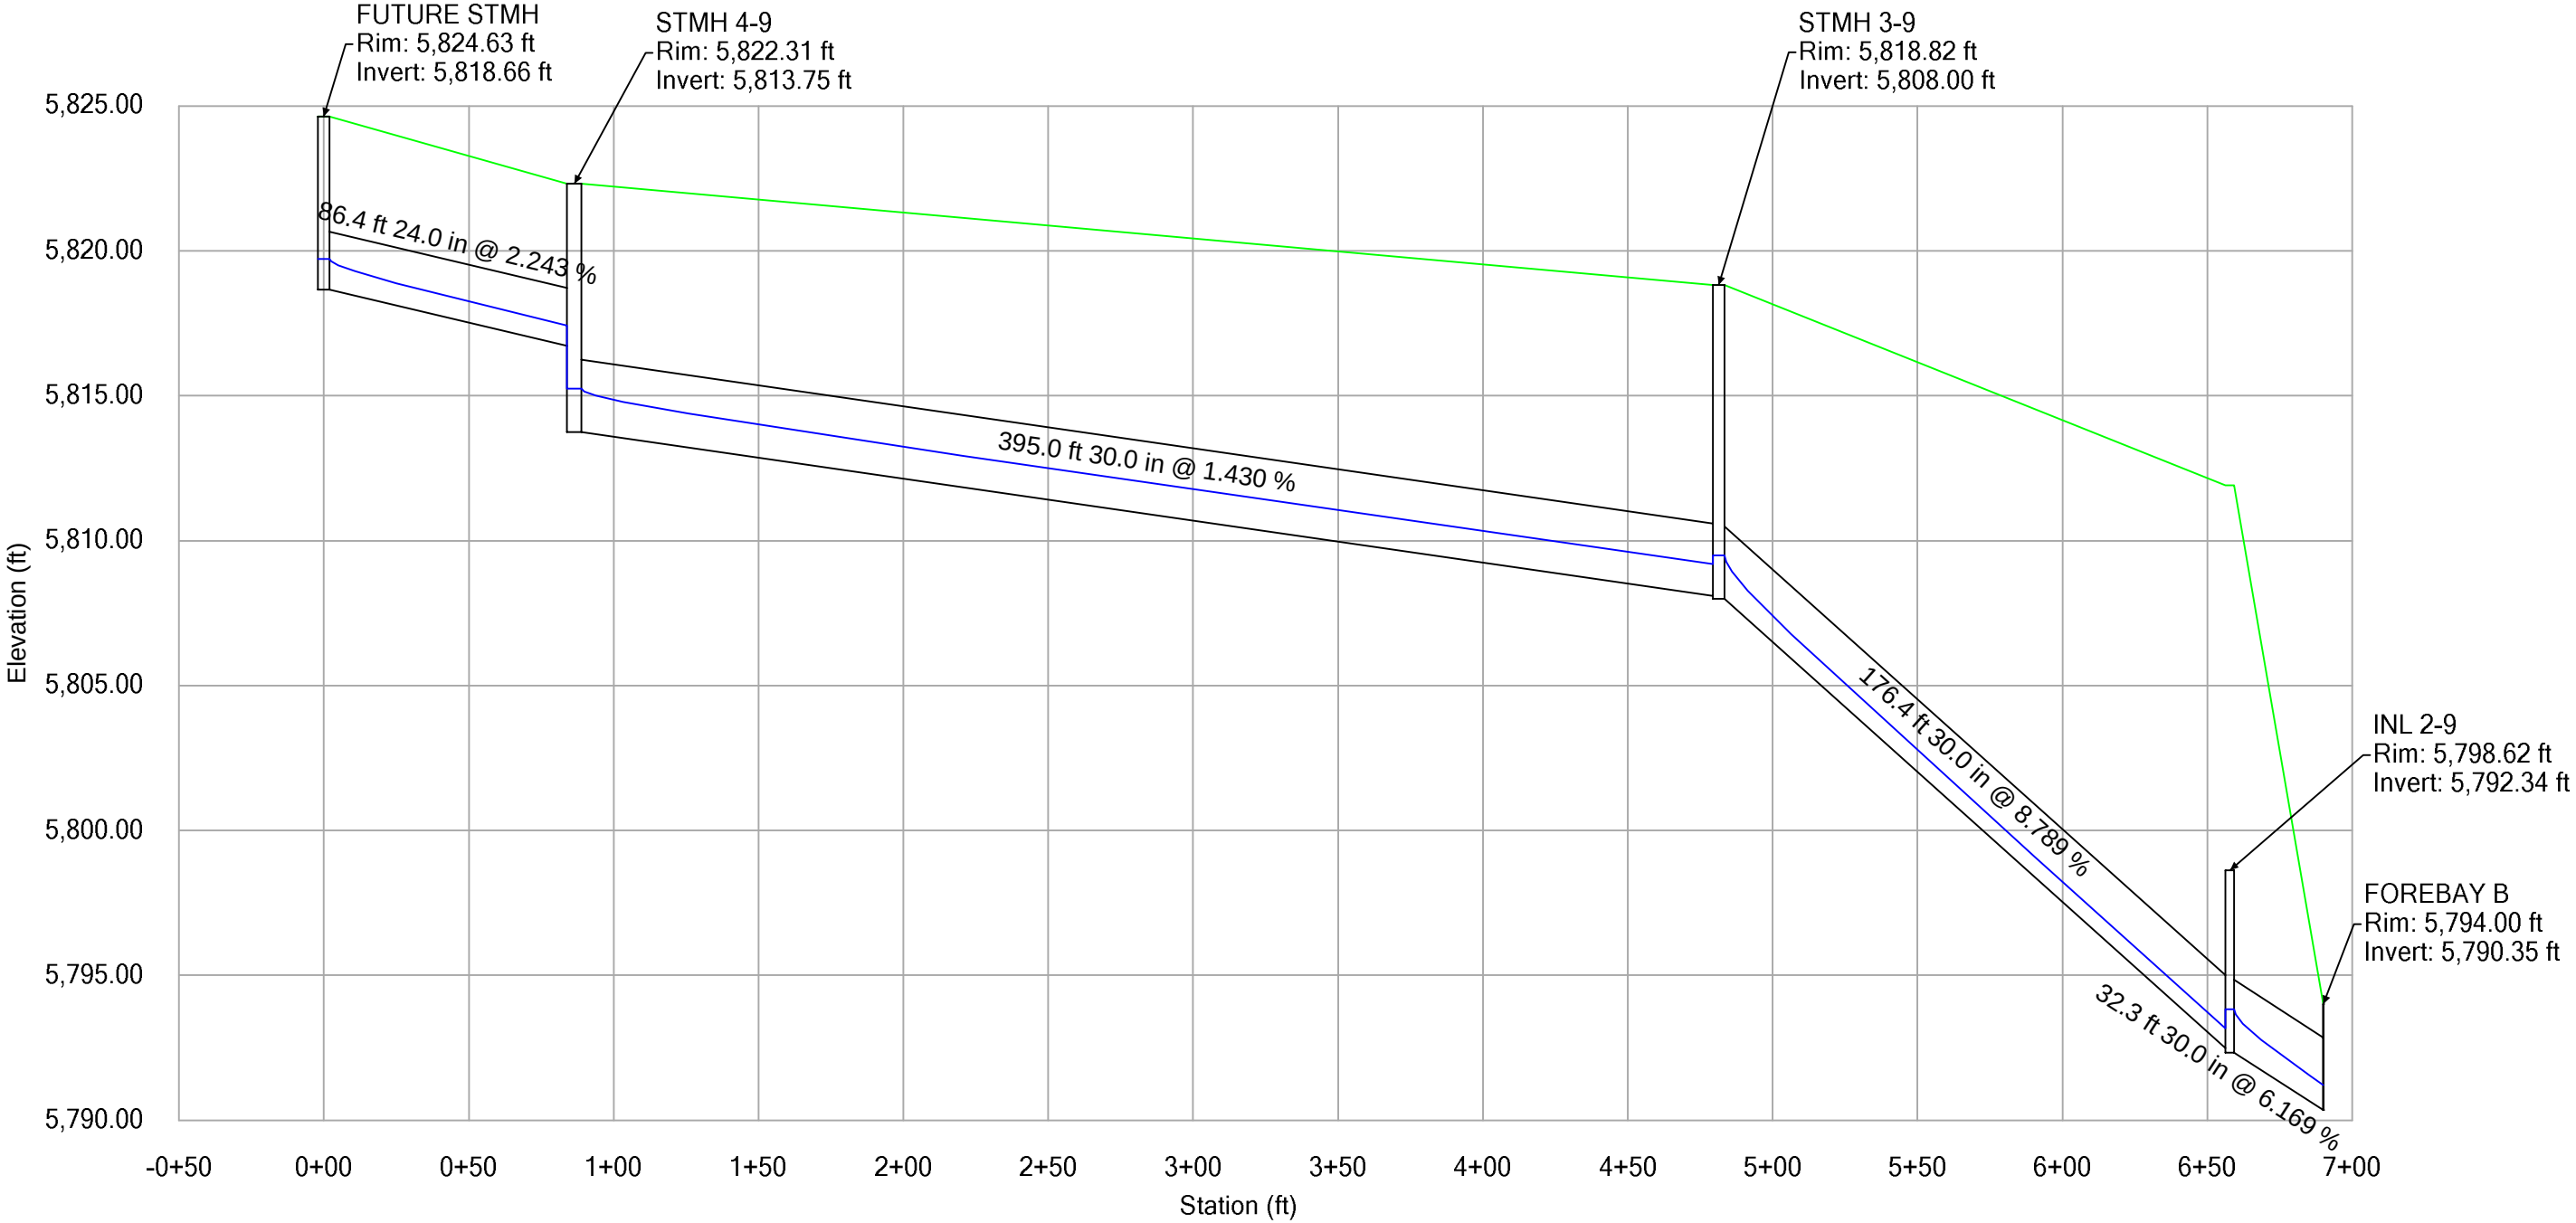


Profile Report
Engineering Profile - Profile - Storm Line 9 (072020 Compark Village South StormCAD [100 year].stsw)

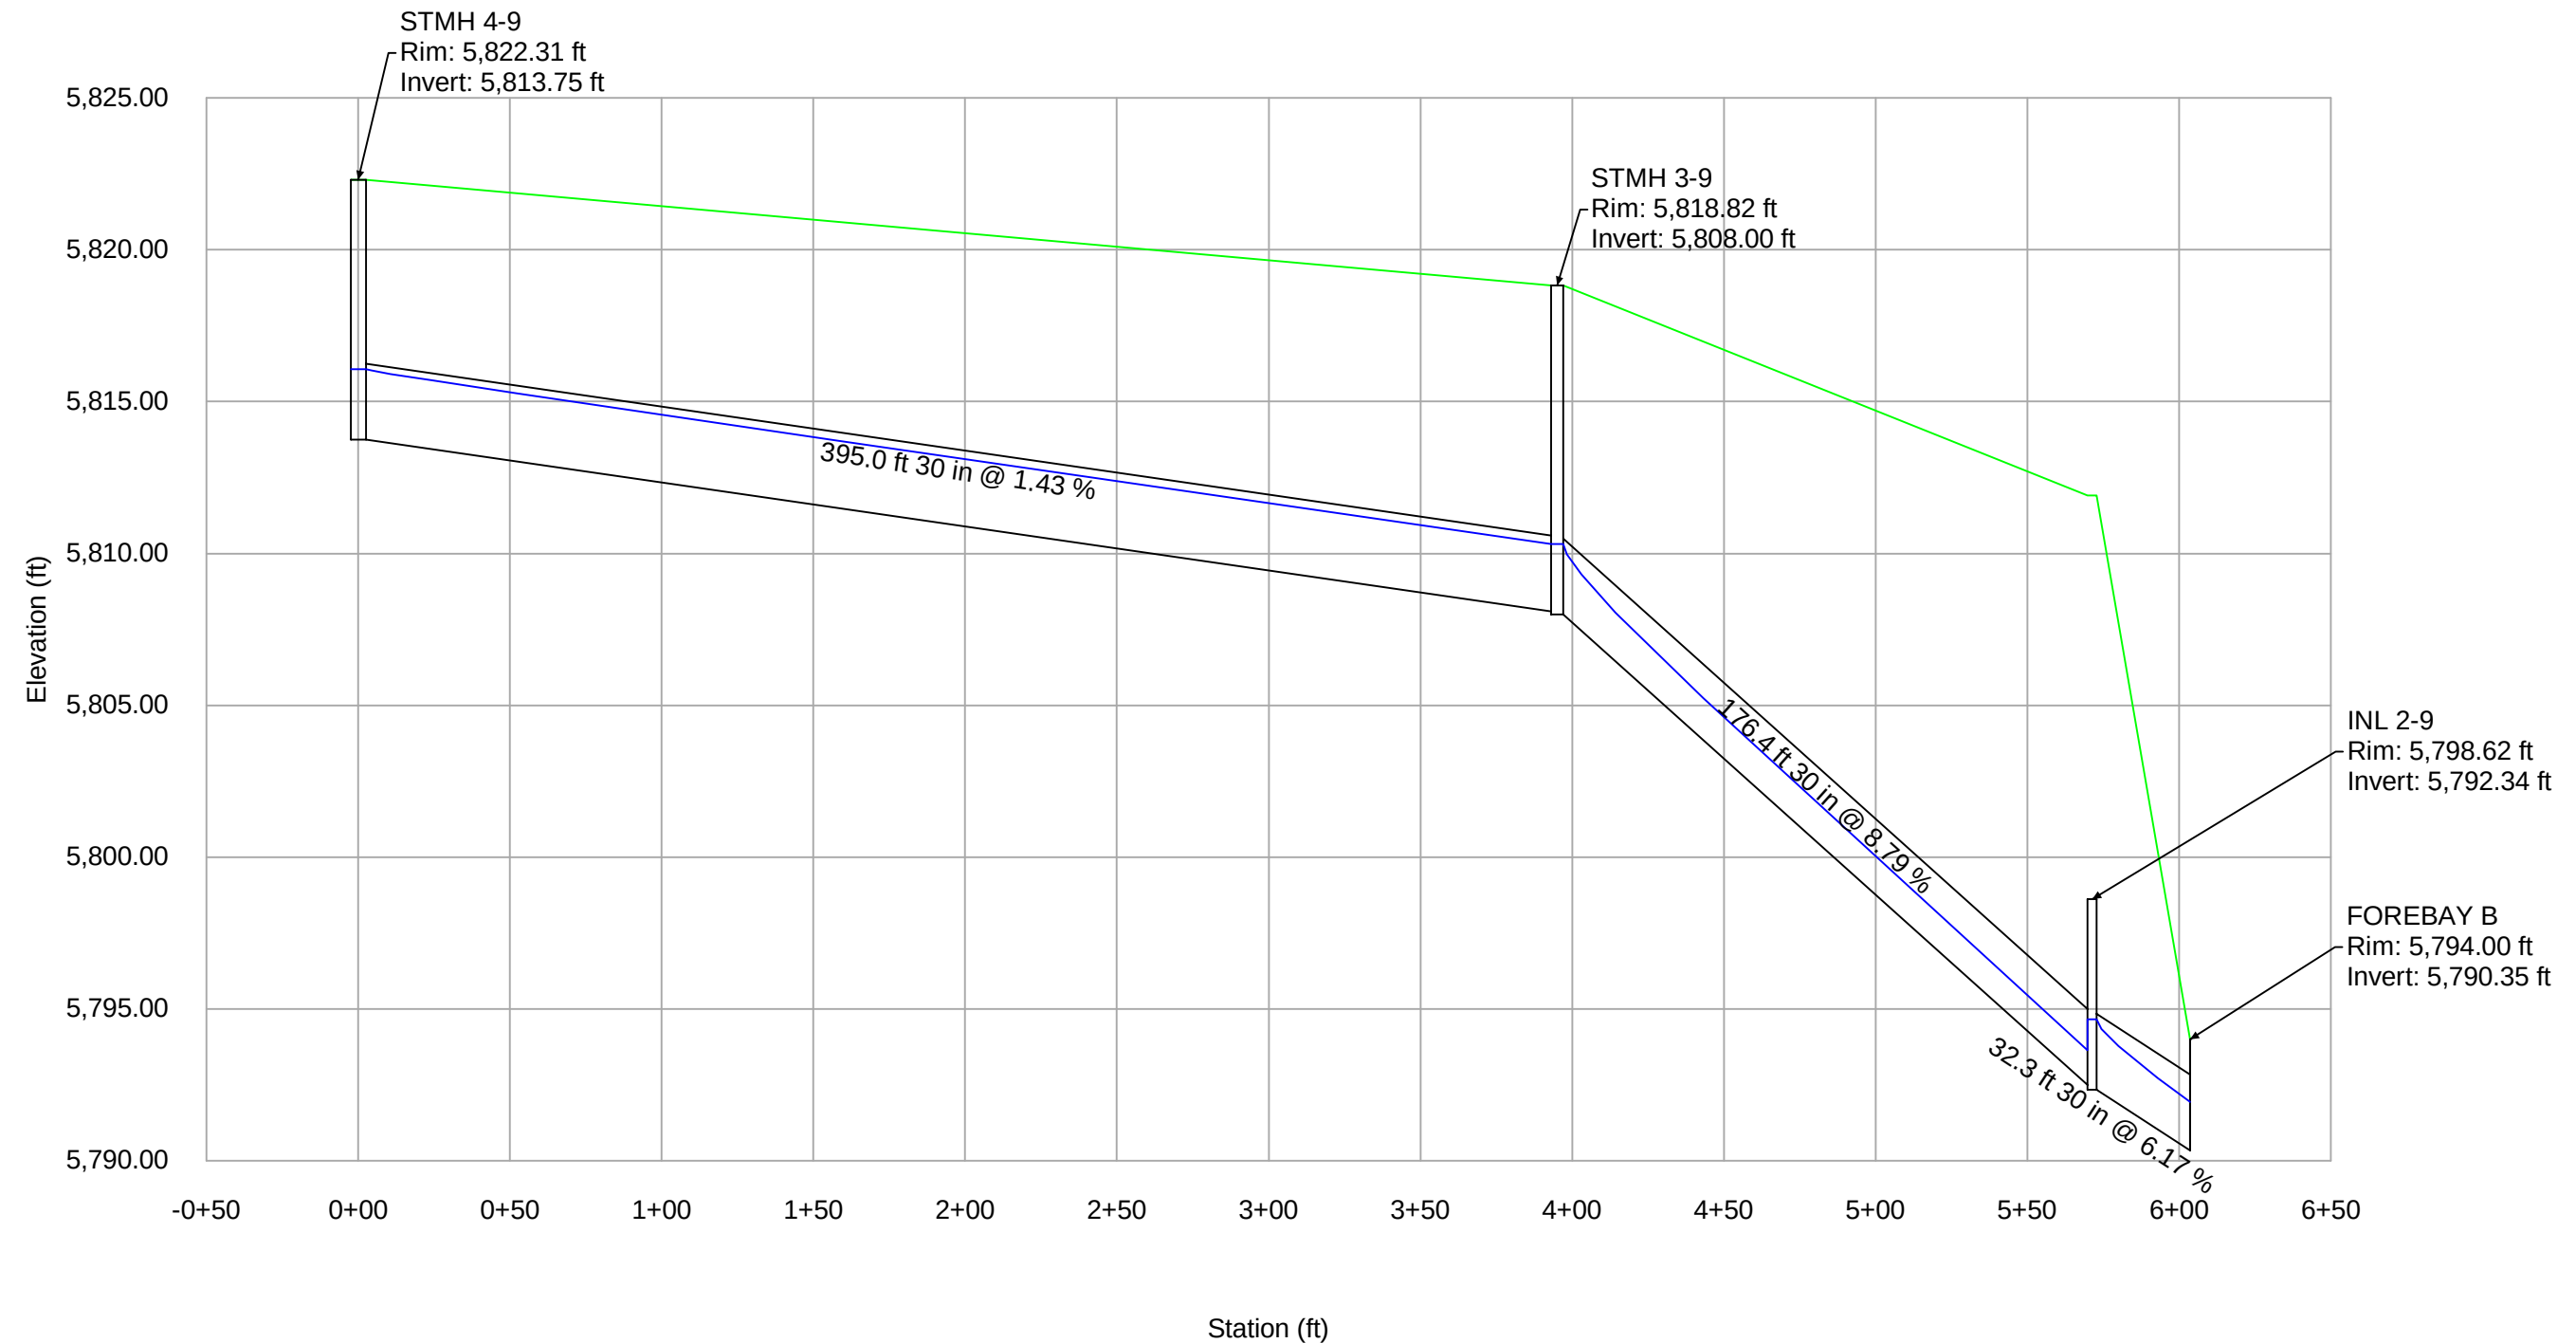


Profile Report

Engineering Profile - Profile - Storm 10 (072020 Compark Village South StormCAD [2 year].stsw)

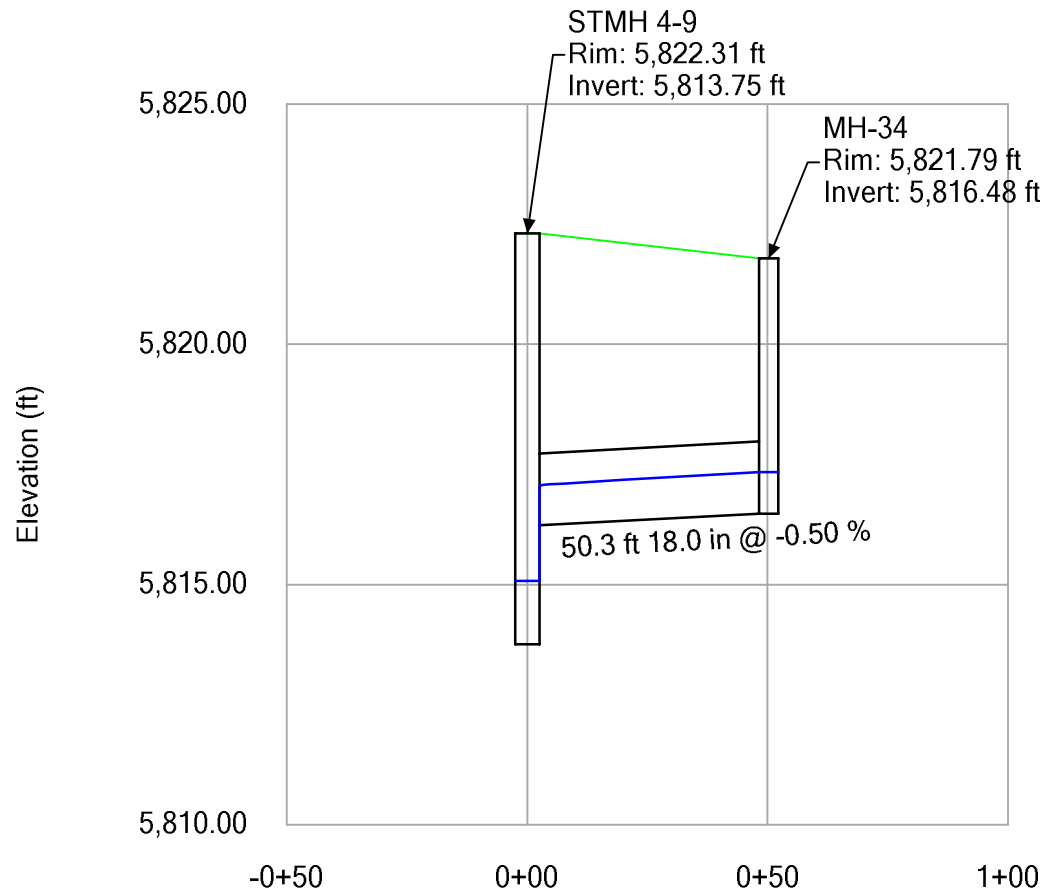


Profile Report

Engineering Profile - Profile -Storm Line 10 (072020 Compark Village South StormCAD [5 year].stsw)

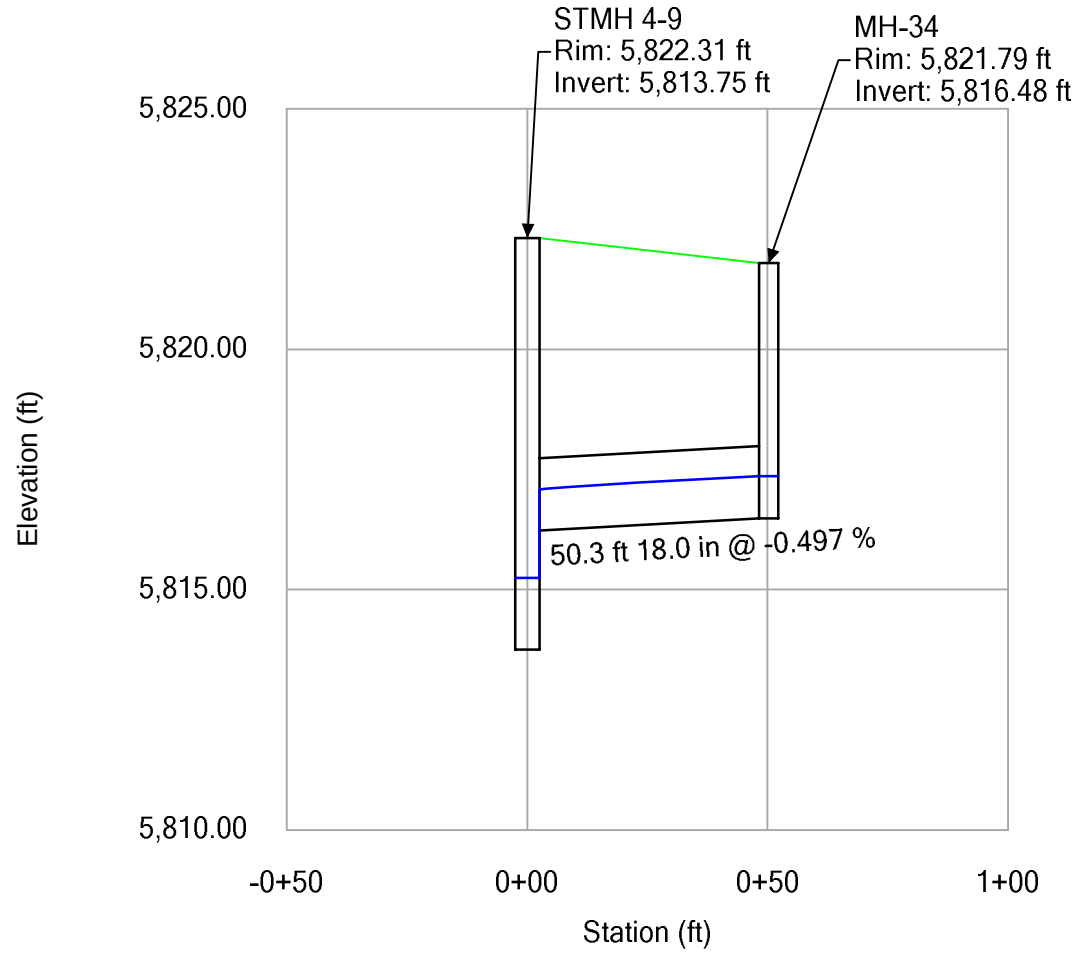


Profile Report
Engineering Profile - Profile - Storm Line 10 (072020 Compark Village South StormCAD [100 year].stsw)

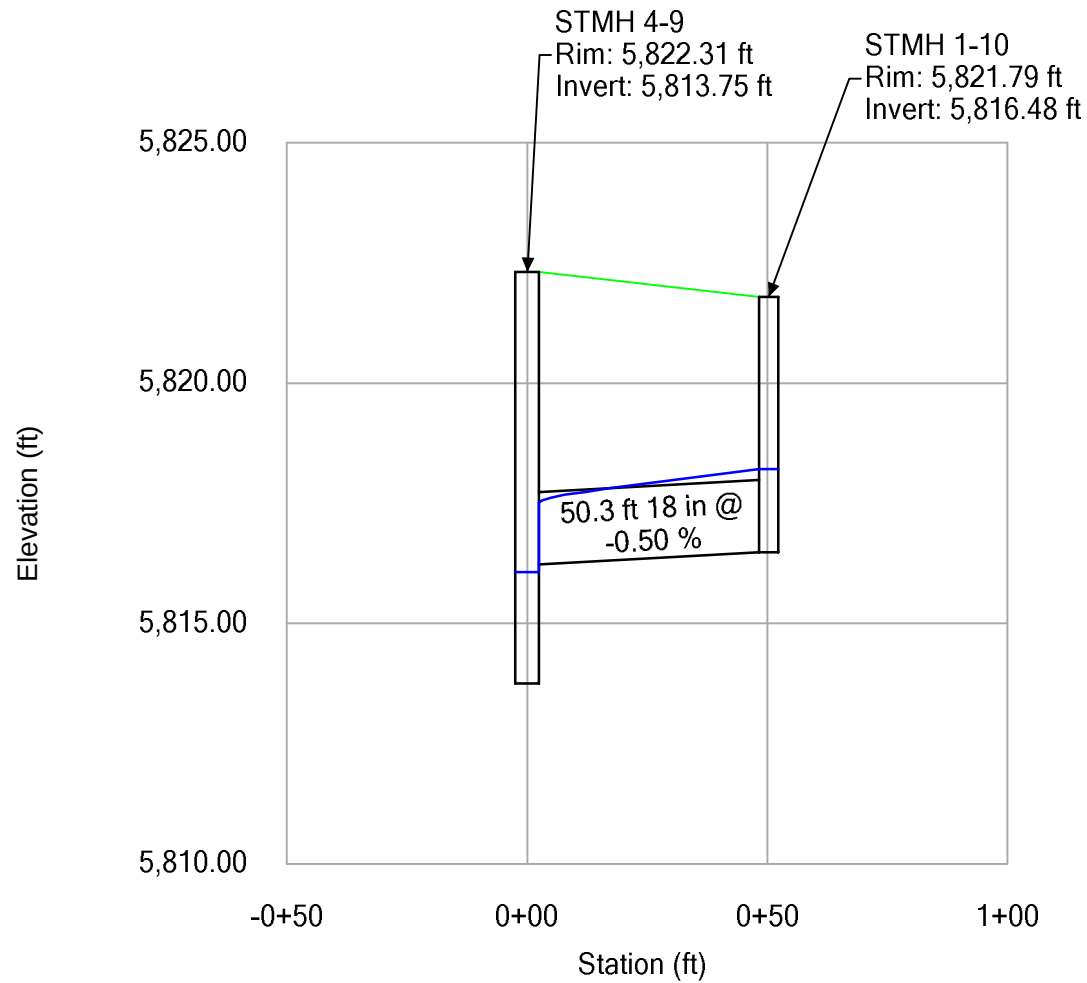


Profile Report

Engineering Profile - Profile - Storm 10A (072020 Compark Village South StormCAD [2 year].stsw)

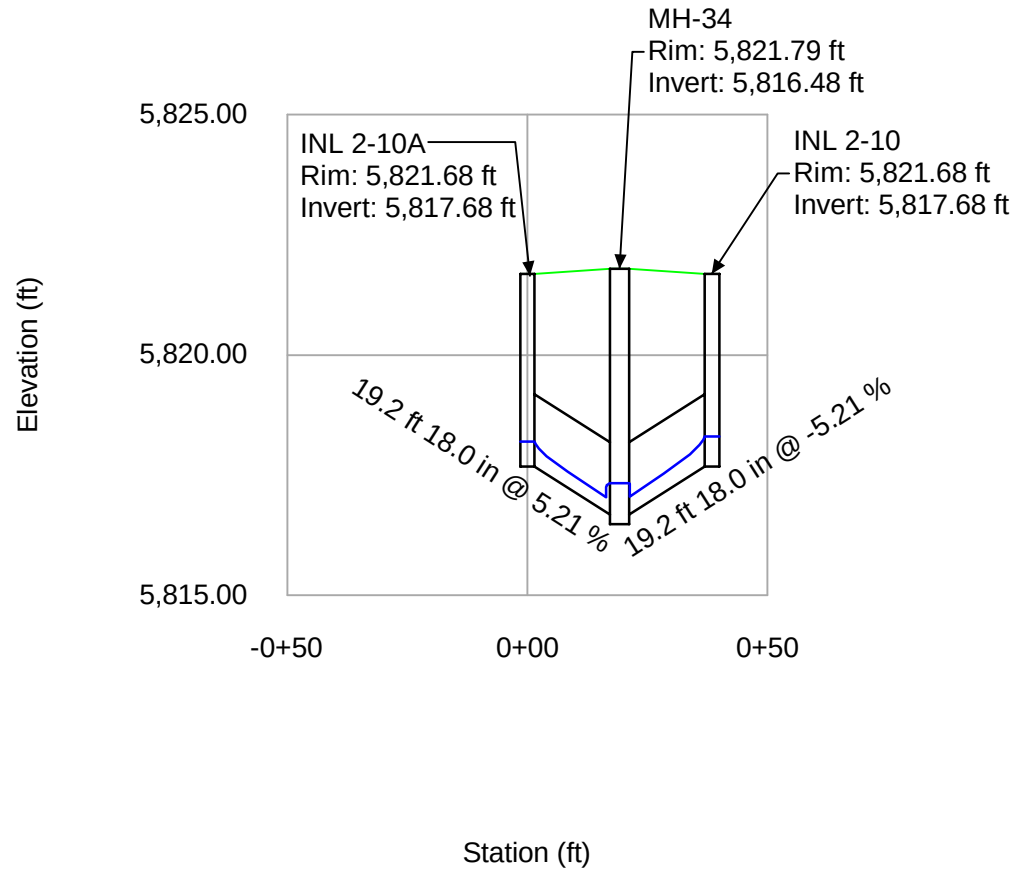


Profile Report

Engineering Profile - Profile - Storm Line 10A (072020 Compark Village South StormCAD [5 year].stsw)

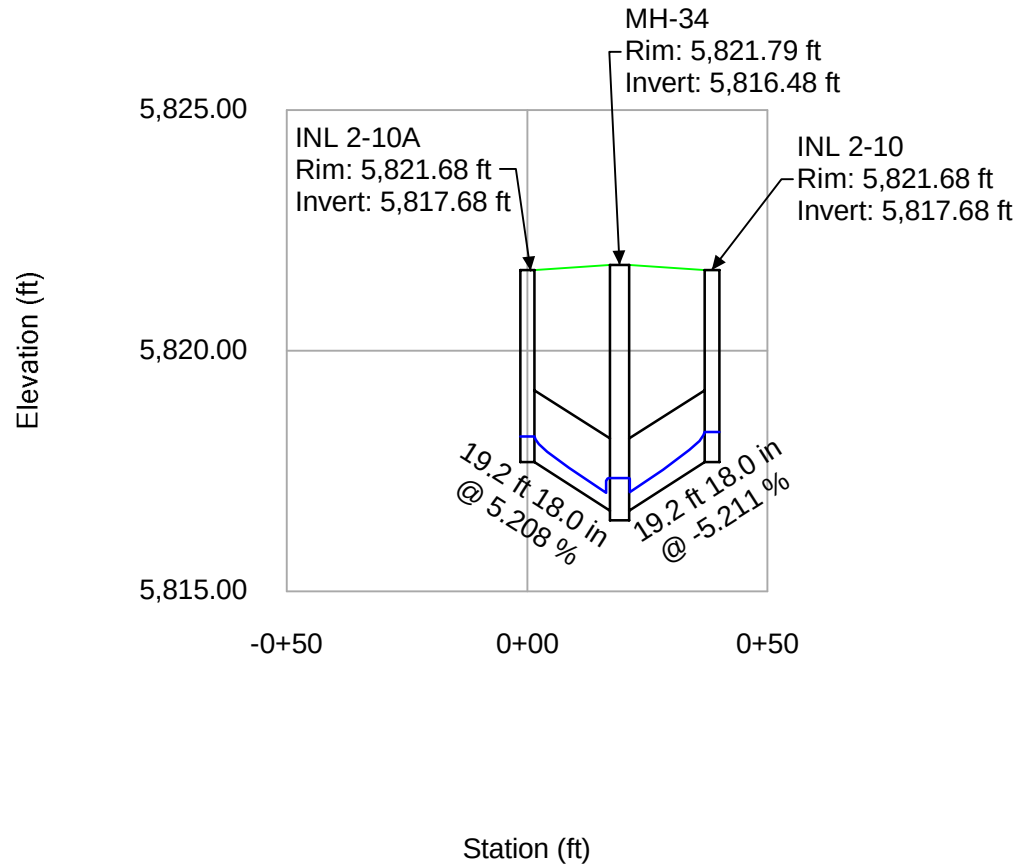


Profile Report
Engineering Profile - Profile - Storm Line 10A (072020 Compark Village South StormCAD [100 year].stsw)

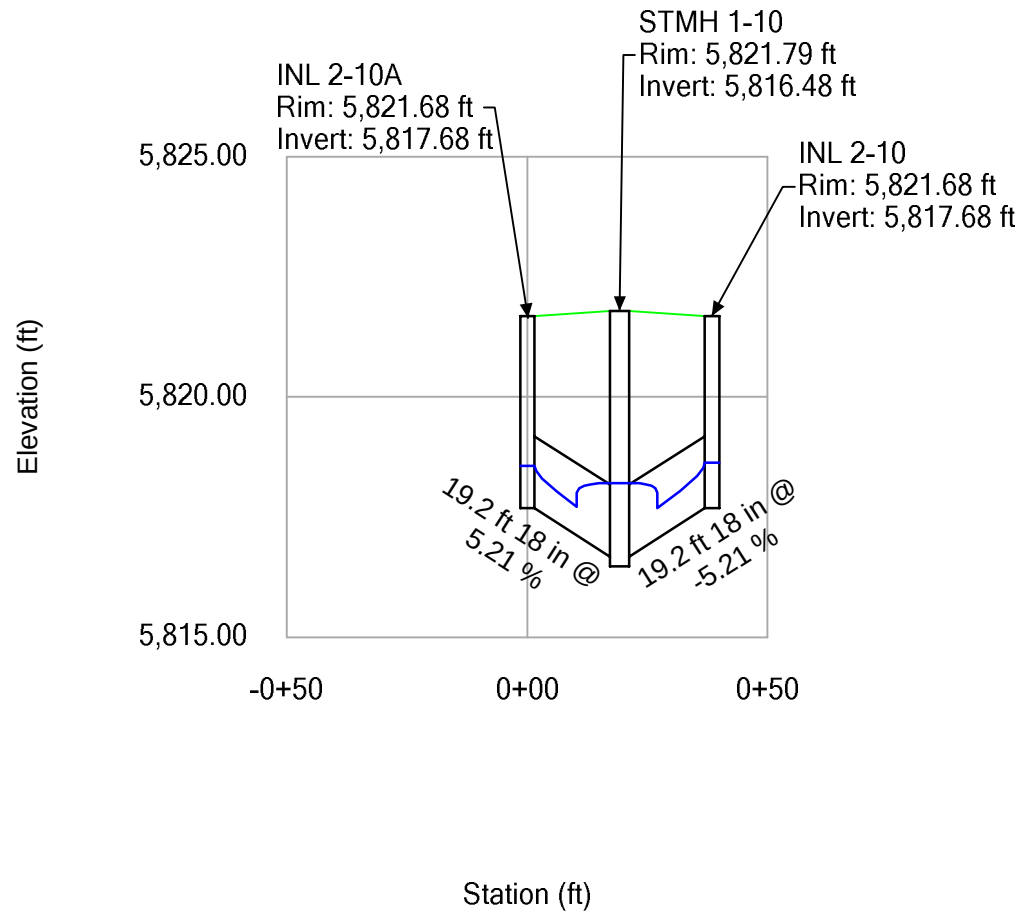


Profile Report

Engineering Profile - Profile - Storm 11 (072020 Compark Village South StormCAD [2 year].stsw)

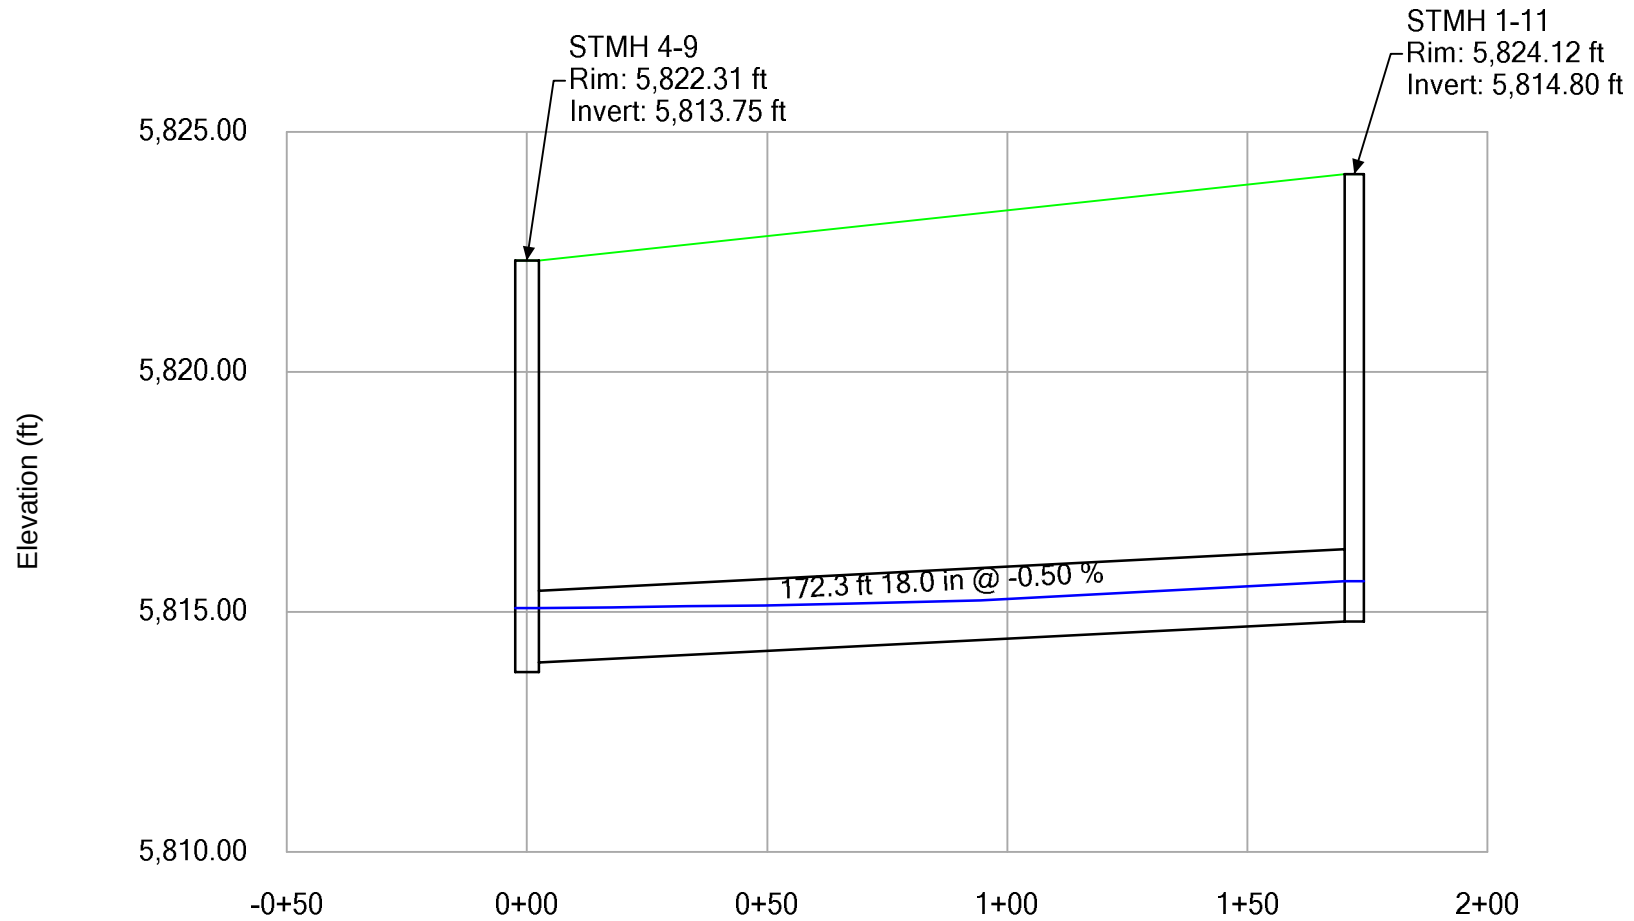


Profile Report

Engineering Profile - Profile - Storm Line 11 (072020 Compark Village South StormCAD [5 year].stsw)

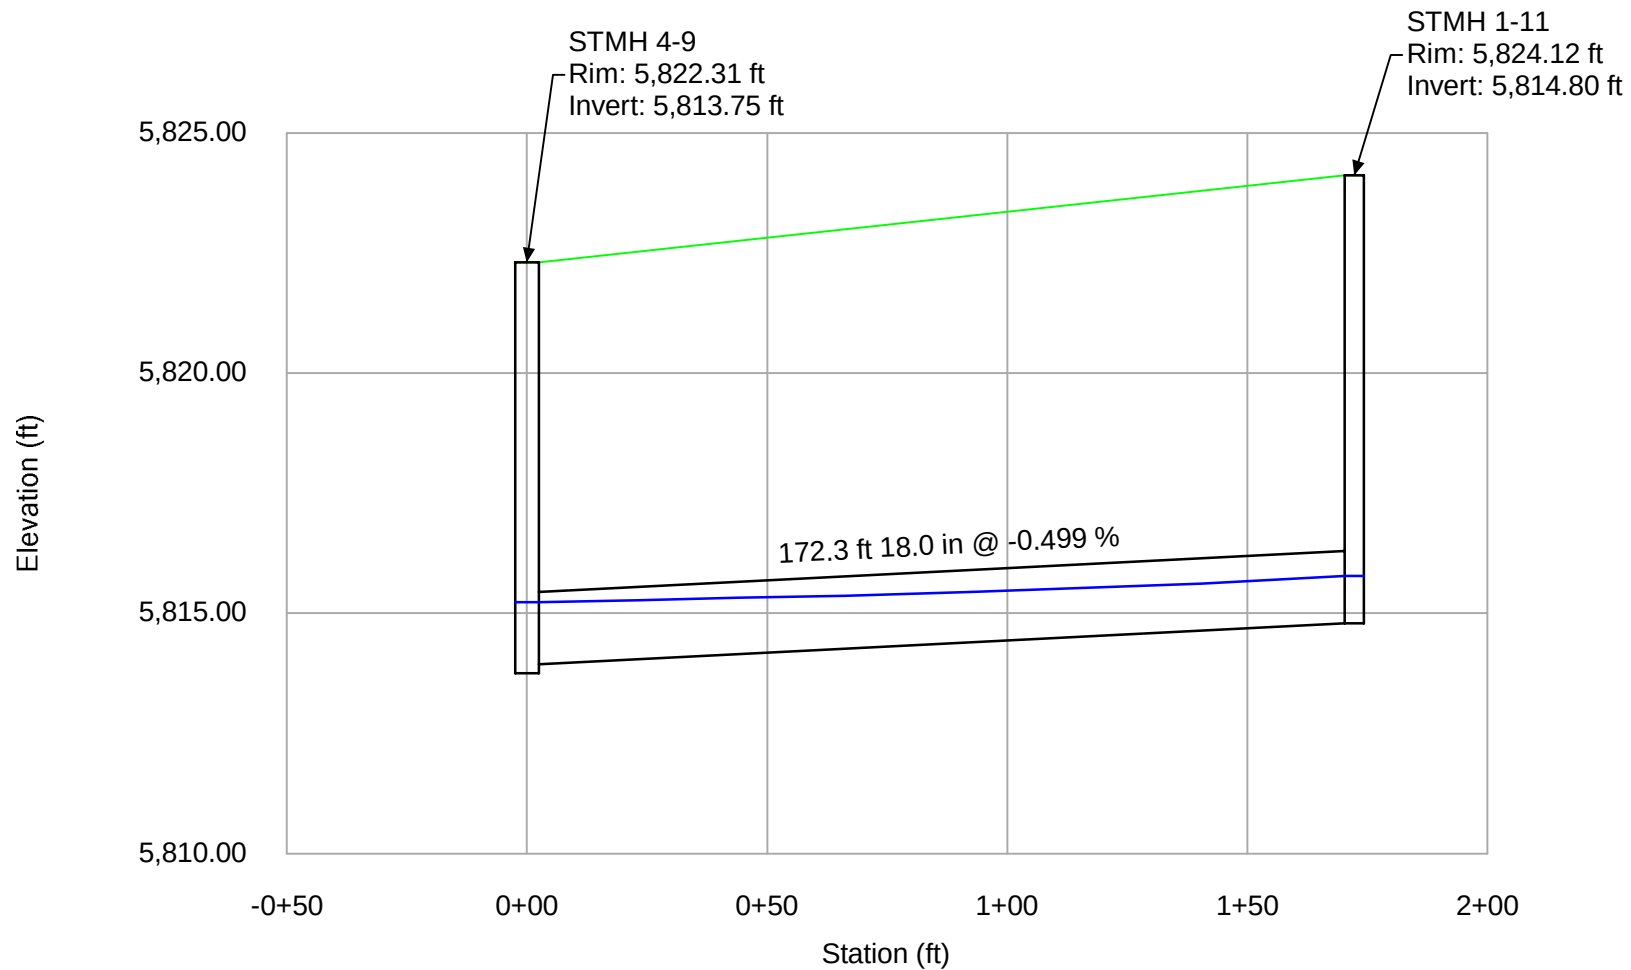


Profile Report

Engineering Profile - Profile - Storm Line 11 (072020 Compark Village South StormCAD [100 year].stsw)

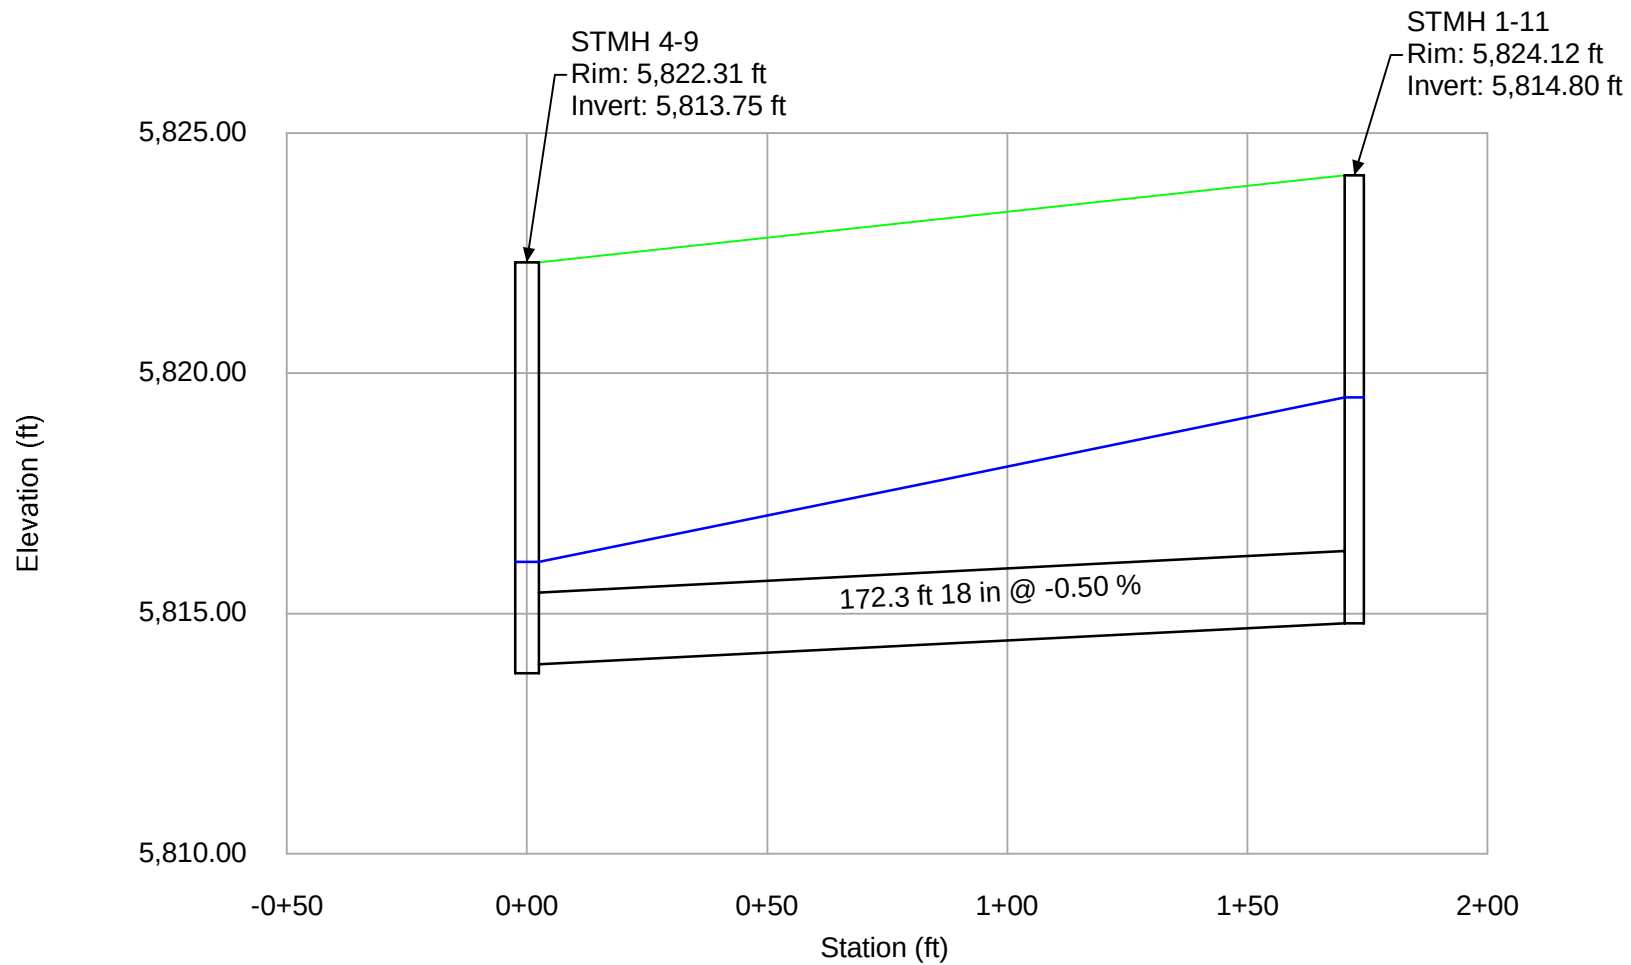


Profile Report


Engineering Profile - Profile - Storm 11A (072020 Compark Village South StormCAD [2 year].stsw)

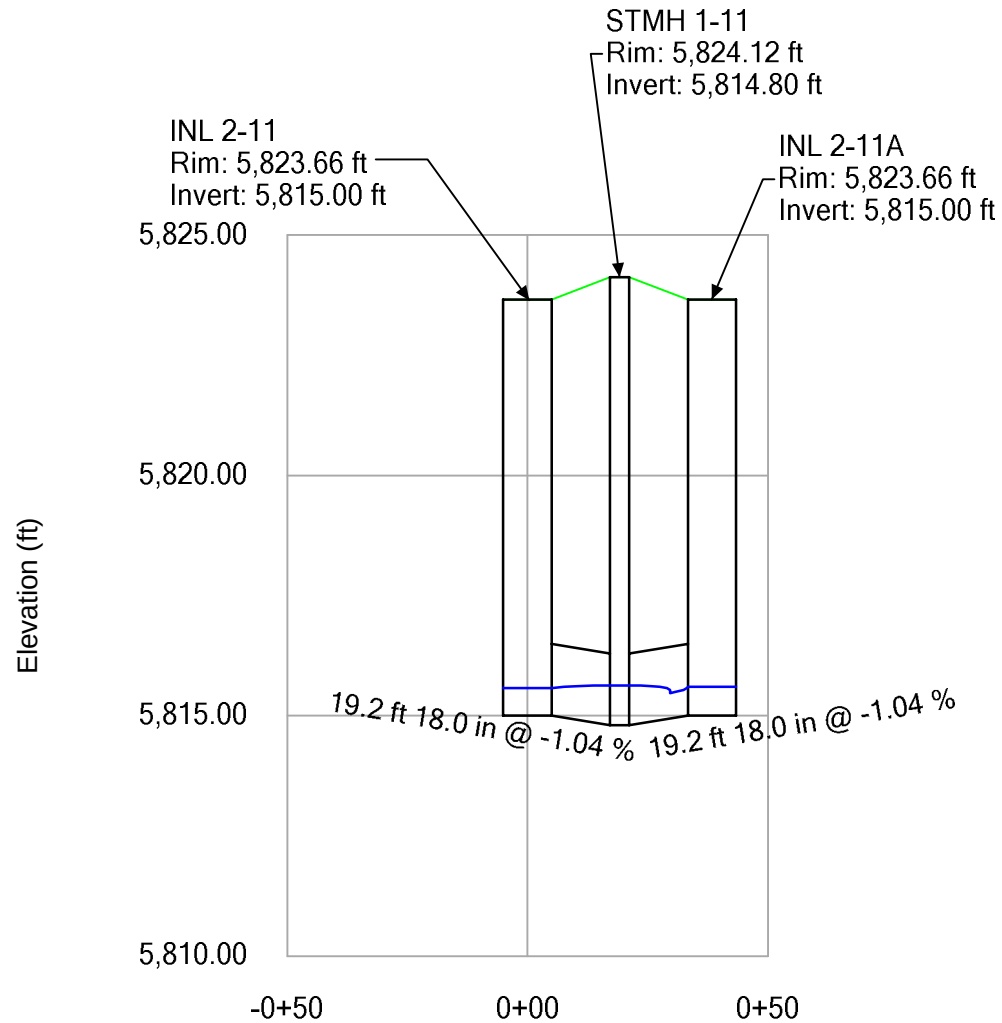

Engineering Profile - Profile - Storm Line 11A (072020 Compark Village South StormCAD [5 year].stsw)



Profile Report Engineering Profile - Profile -Storm Line 11A (072020 Compark Village South StormCAD [100 year].stsw)

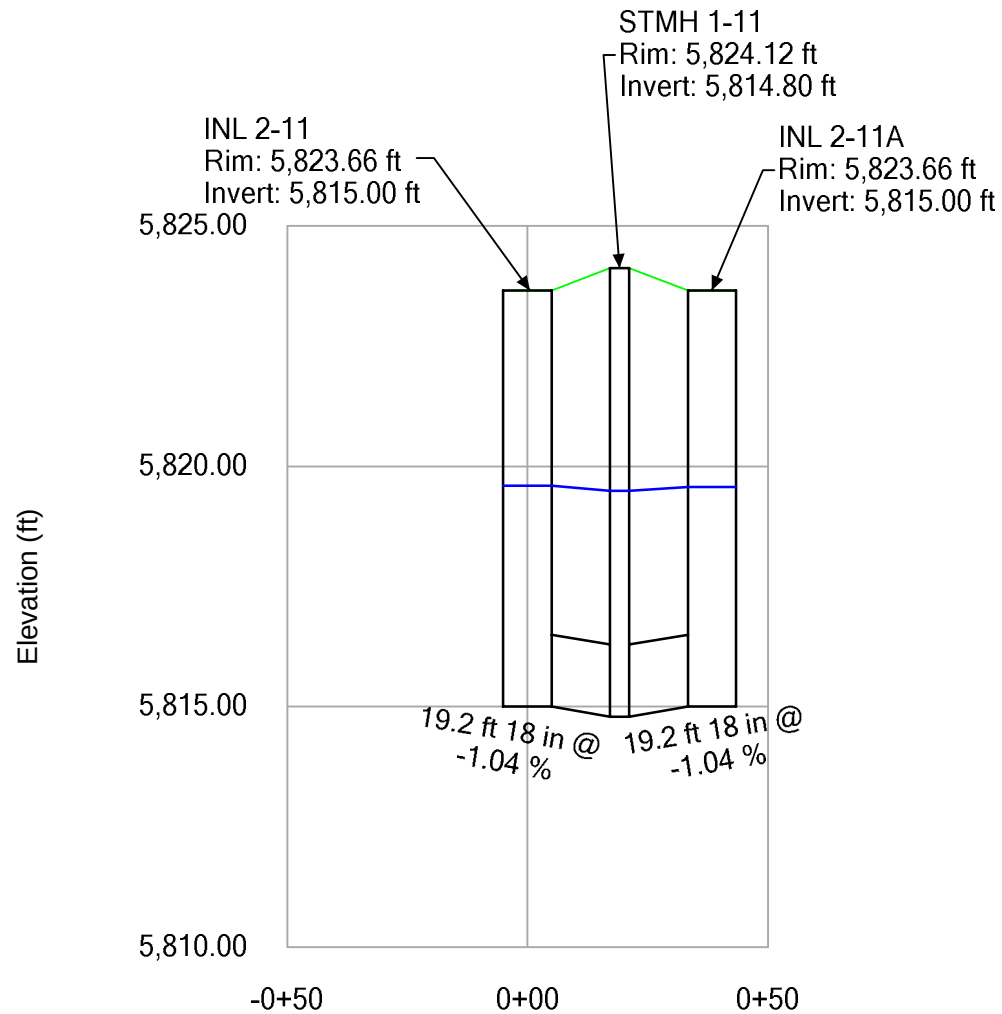

FlexTable: Conduit Table 2 YR STORM EVENT

Start Node	Invert (Start) (ft)	Stop Node	Invert (Stop) (ft)	Length (User Defined) (ft)	Slope (Calculated) (%)	Section Type	Diameter (in)	Manning's n	Flow (cfs)	Velocity (ft/s)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
STMH 6-4	5,834.91	INLET 6-4	5,832.53	120.0	1.98	Circle	36.0	0.013	8.50	8.25	5,835.83	5,833.14
INLET 6-4	5,832.33	STMH 5-4	5,827.71	278.0	1.66	Circle	36.0	0.013	9.60	8.03	5,833.31	5,828.39
FES 2-5	5,834.54	INLET 8-5	5,834.00	7.7	7.01	Circle	24.0	0.013	4.10	10.91	5,835.25	5,834.45
INLET 5-4	5,829.34	STMH 5-4	5,828.83	52.0	0.99	Circle	18.0	0.013	3.40	5.28	5,830.05	5,829.42
INLET 3-4	5,825.42	STMH 4-4	5,825.23	20.0	0.95	Circle	18.0	0.013	3.90	5.40	5,826.18	5,825.89
INLET 1-4	5,823.04	STMH 2-4	5,821.92	65.0	1.72	Circle	18.0	0.013	2.30	5.79	5,823.61	5,822.33
INLET 4-4	5,825.42	STMH 4-4	5,825.23	20.0	0.95	Circle	18.0	0.013	0.90	3.57	5,825.77	5,825.53
INLET 2-6	5,814.55	INLET 1-6	5,814.15	80.0	0.50	Circle	18.0	0.013	2.90	3.94	5,815.20	5,814.96
INLET 2-3	5,836.69	INLET 1-3	5,831.04	94.0	6.01	Circle	24.0	0.013	4.20	10.40	5,837.41	5,831.41
FES 2-4	5,842.00	STMH 6-4	5,835.11	221.0	3.12	Circle	36.0	0.013	8.50	9.68	5,842.92	5,835.66
STMH 5-4	5,827.41	STMH 4-4	5,822.96	163.0	2.73	Circle	36.0	0.013	14.00	10.69	5,828.60	5,823.68
INLET 4-5	5,812.96	STMH 2-5A	5,812.27	19.0	3.63	Circle	18.0	0.013	2.40	7.64	5,813.55	5,813.63
INLET 5-5	5,813.90	STMH 2-5	5,811.47	49.0	4.96	Circle	18.0	0.013	3.30	9.35	5,814.59	5,813.40
STMH 4-4	5,822.16	STMH 3-4	5,821.56	79.0	0.76	Circle	36.0	0.013	18.80	7.34	5,823.55	5,822.99
STMH 3-4	5,821.46	STMH 2-4	5,820.65	76.0	1.07	Circle	36.0	0.013	21.30	8.59	5,822.94	5,821.82
INLET 2-4	5,822.07	STMH 3-4	5,821.56	56.0	0.91	Circle	18.0	0.013	2.50	4.71	5,822.96	5,822.97
STMH 1-6	5,806.20	FES1-6	5,806.00	40.0	0.50	Circle	24.0	0.013	0.00	0.00	5,806.20	5,806.00
INLET 8-5	5,833.51	INLET 7-5	5,827.49	173.0	3.48	Circle	24.0	0.013	4.10	8.52	5,834.22	5,827.91
INLET 4-5A	5,821.14	STMH 2-5E	5,820.90	20.0	1.20	Circle	18.0	0.013	4.10	5.96	5,821.92	5,821.91
INLET 5-5A	5,821.14	STMH 2-5E	5,820.90	20.0	1.20	Circle	18.0	0.013	4.20	6.00	5,821.93	5,821.91
STMH 2-5	5,811.37	INLET 3-5	5,810.99	16.0	2.38	Circle	42.0	0.013	36.10	13.13	5,813.23	5,812.45
INLET 7-5	5,827.14	STMH 4-5	5,822.27	104.6	4.66	Circle	24.0	0.013	4.30	9.57	5,827.87	5,823.07
STMH 4-5	5,822.27	INLET 6-5	5,821.44	23.0	3.61	Circle	24.0	0.013	4.30	8.75	5,823.00	5,822.20
STMH 2-5A	5,812.17	STMH 2-5	5,811.47	50.0	1.40	Circle	36.0	0.013	20.00	9.32	5,813.60	5,813.41
STMH 2-5B	5,815.51	STMH 2-5A	5,812.17	241.0	1.39	Circle	30.0	0.013	17.60	9.06	5,816.93	5,813.65
STMH 1-4	5,818.23	FES 1-4	5,818.00	46.0	0.50	Circle	36.0	0.013	0.00	0.00	5,818.23	5,818.00
INLET 1-3	5,829.94	STMH 1-3	5,829.37	18.4	3.10	Circle	24.0	0.013	8.90	10.21	5,831.00	5,830.87
STMH 1-3	5,829.37	O-1	5,829.00	12.0	3.08	Circle	24.0	0.013	8.90	10.19	5,830.85	5,830.90
INLET 5-4A	5,829.26	STMH 5-4	5,828.83	43.0	1.00	Circle	18.0	0.013	1.00	3.75	5,829.63	5,829.14
STMH 2-5E	5,820.80	STMH 2-5D	5,820.12	44.0	1.55	Circle	24.0	0.013	8.30	7.79	5,821.83	5,821.42
STMH 2-5D	5,820.12	STMH 2-5C	5,819.49	45.0	1.40	Circle	24.0	0.013	11.80	8.25	5,821.35	5,820.86
STMH 2-5C	5,819.49	STMH 2-5B	5,815.51	289.0	1.38	Circle	30.0	0.013	15.20	8.69	5,820.81	5,816.97
INLET 4-5B	5,819.70	STMH 2-5C	5,819.52	18.0	1.00	Circle	18.0	0.013	3.40	5.30	5,820.85	5,820.85
INLET 5-5B	5,828.30	STMH 2-5D	5,820.22	293.0	2.76	Circle	18.0	0.013	3.50	7.71	5,829.01	5,821.43
INLET 4-5C	5,815.79	STMH 2-5B	5,815.61	18.0	1.00	Circle	18.0	0.013	2.40	4.82	5,816.96	5,816.96
INLET 6-5	5,821.14	STMH 3-5A	5,812.67	247.0	3.43	Circle	30.0	0.013	8.20	10.12	5,822.09	5,813.92
STMH 3-5A	5,812.67	STMH 2-5	5,811.37	48.0	2.71	Circle	30.0	0.013	12.80	10.58	5,813.87	5,813.31
INLET 6-5A	5,812.86	STMH 3-5A	5,812.67	19.0	1.00	Circle	18.0	0.013	2.60	4.93	5,813.90	5,813.91
INLET 6-5B	5,812.86	STMH 3-5A	5,812.67	19.0	1.00	Circle	18.0	0.013	2.00	4.58	5,813.90	5,813.90
INLET 1-6	5,814.05	DIVERSION - STMH 8-12	5,813.06	16.0	6.19	Circle	24.0	0.013	5.80	11.56	5,814.90	5,813.57
STMH 1-12	5,820.16	STMH 2-12	5,819.90	52.0	0.50	Circle	30.0	0.013	23.60	6.58	5,822.55	5,822.40
STMH 2-12	5,819.80	STMH 3-12	5,818.95	168.0	0.51	Circle	30.0	0.013	23.60	6.62	5,821.51	5,820.65
STMH 3-12	5,818.85	STMH 4-12	5,817.87	196.0	0.50	Circle	30.0	0.013	23.60	6.58	5,820.56	5,819.57
STMH 4-12	5,817.77	STMH 5-12	5,816.76	202.0	0.50	Circle	30.0	0.013	23.60	6.58	5,819.48	5,818.41
STMH 5-12	5,816.66	STMH 6-12	5,808.94	286.0	2.70	Circle	30.0	0.013	23.60	12.51	5,818.31	5,811.37
STMH 7-12	5,812.68	STMH 6-12	5,812.33	70.0	0.50	Circle	18.0	0.013	5.80	4.65	5,813.68	5,813.26
INLET 2-5	5,808.00	STMH 10-12	5,807.36	27.0	2.37	Circle	24.0	0.013	7.90	8.97	5,809.29	5,809.36
STMH 10-12	5,807.36	INLET 1-5	5,808.34	67.9	-1.44	Circle	24.0	0.013	4.90	6.56	5,809.28	5,809.36

FlexTable: Conduit Table 5 YR STORM EVENT

Start Node	Invert (Start) (ft)	Stop Node	Invert (Stop) (ft)	Length (User Defined) (ft)	Slope (Calculated) (%)	Section Type	Diameter (in)	Manning's n	Flow (cfs)	Velocity (ft/s)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
STMH 6-4	5,834.91	INLET 6-4	5,832.53	120.0	1.983	Circle	36.0	0.013	8.50	8.25	5,835.83	5,833.14
INLET 6-4	5,832.33	STMH 5-4	5,827.71	278.0	1.662	Circle	36.0	0.013	9.60	8.03	5,833.31	5,828.39
FES 2-5	5,834.54	INLET 8-5	5,834.00	7.7	7.013	Circle	24.0	0.013	4.10	10.91	5,835.25	5,834.45
INLET 5-4	5,829.34	STMH 5-4	5,828.83	52.0	0.989	Circle	18.0	0.013	3.60	5.37	5,830.07	5,829.44
INLET 3-4	5,825.42	STMH 4-4	5,825.23	20.0	0.950	Circle	18.0	0.013	4.00	5.44	5,826.19	5,825.89
INLET 1-4	5,823.04	STMH 2-4	5,821.92	65.0	1.723	Circle	18.0	0.013	2.40	5.86	5,823.63	5,822.34
INLET 4-4	5,825.42	STMH 4-4	5,825.23	20.0	0.950	Circle	18.0	0.013	0.90	3.57	5,825.77	5,825.53
INLET 2-6	5,813.03	INLET 1-6	5,811.92	80.0	1.388	Circle	24.0	0.013	3.00	5.61	5,813.63	5,812.65
INLET 2-5	5,808.09	INLET 1-5	5,807.49	90.0	0.669	Circle	36.0	0.013	8.20	5.56	5,809.00	5,808.81
INLET 1-5	5,807.29	STMH 1-5	5,806.51	103.0	0.757	Circle	36.0	0.013	13.30	6.66	5,808.68	5,808.76
STMH 1-5	5,805.81	FES 1-5	5,793.00	446.0	2.872	Circle	42.0	0.013	55.71	15.85	5,808.15	5,794.38
INLET 2-3	5,840.56	INLET 1-3	5,831.04	94.0	10.128	Circle	24.0	0.013	4.50	12.77	5,841.31	5,831.38
FES 2-4	5,842.00	STMH 6-4	5,835.11	221.0	3.118	Circle	36.0	0.013	8.50	9.68	5,842.92	5,835.66
STMH 5-4	5,827.41	STMH 4-4	5,822.96	163.0	2.730	Circle	36.0	0.013	14.30	10.75	5,828.61	5,823.69
INLET 4-5	5,812.96	STMH 2-5A	5,812.27	19.0	3.632	Circle	18.0	0.013	2.50	7.73	5,813.56	5,813.65
INLET 5-5	5,813.90	STMH 2-5	5,811.47	49.0	4.959	Circle	18.0	0.013	3.40	9.43	5,814.60	5,813.44
STMH 4-4	5,822.16	STMH 3-4	5,821.56	79.0	0.759	Circle	36.0	0.013	19.20	7.38	5,823.56	5,823.01
STMH 3-4	5,821.46	STMH 2-4	5,820.65	76.0	1.066	Circle	36.0	0.013	21.80	8.64	5,822.96	5,822.19
INLET 2-4	5,822.07	STMH 3-4	5,821.56	56.0	0.911	Circle	18.0	0.013	2.60	4.76	5,822.98	5,822.99
INLET 1-6	5,811.72	STMH 1-6	5,810.35	133.0	1.030	Circle	24.0	0.013	6.00	6.15	5,812.59	5,811.05
STMH 1-6	5,810.25	FES1-6	5,810.00	50.0	0.500	Circle	24.0	0.013	6.00	4.73	5,811.12	5,810.85
INLET 8-5	5,833.51	INLET 7-5	5,827.49	173.0	3.480	Circle	24.0	0.013	4.10	8.52	5,834.22	5,827.91
INLET 4-5A	5,821.14	STMH 2-5E	5,820.90	20.0	1.200	Circle	18.0	0.013	4.30	6.04	5,821.94	5,821.93
INLET 5-5A	5,821.14	STMH 2-5E	5,820.90	20.0	1.200	Circle	18.0	0.013	4.30	6.04	5,821.94	5,821.93
STMH 2-5	5,811.37	INLET 3-5	5,810.99	16.0	2.375	Circle	42.0	0.013	37.30	13.25	5,813.27	5,812.96
INLET 3-5	5,810.89	STMH 1-5	5,806.01	266.0	1.835	Circle	42.0	0.013	41.40	12.42	5,812.89	5,808.25
INLET 7-5	5,827.14	STMH 4-5	5,822.27	104.6	4.656	Circle	24.0	0.013	4.30	9.57	5,827.87	5,823.07
STMH 4-5	5,822.27	INLET 6-5	5,821.44	23.0	3.609	Circle	24.0	0.013	4.30	8.75	5,823.00	5,822.22
STMH 2-5A	5,812.17	STMH 2-5	5,811.47	50.0	1.400	Circle	36.0	0.013	20.60	9.39	5,813.63	5,813.44
STMH 2-5B	5,815.51	STMH 2-5A	5,812.17	241.0	1.386	Circle	30.0	0.013	18.10	9.13	5,816.95	5,813.67
STMH 2-4	5,820.42	STMH 1-4	5,818.85	60.0	2.609	Circle	36.0	0.013	24.20	12.30	5,822.00	5,819.89
STMH 1-4	5,818.85	FES 1-4	5,818.00	33.0	2.576	Circle	36.0	0.013	24.20	12.24	5,820.44	5,820.00
INLET 1-3	5,829.94	STMH 1-3	5,829.37	18.4	3.098	Circle	24.0	0.013	10.00	10.55	5,831.07	5,830.85
STMH 1-3	5,829.37	O-1	5,829.00	12.0	3.083	Circle	24.0	0.013	10.00	10.53	5,830.83	5,830.90
INLET 5-4A	5,829.26	STMH 5-4	5,828.83	43.0	1.000	Circle	18.0	0.013	1.10	3.85	5,829.65	5,829.16
STMH 2-5E	5,820.80	STMH 2-5D	5,820.12	44.0	1.545	Circle	24.0	0.013	8.60	7.86	5,821.85	5,821.44
STMH 2-5D	5,820.12	STMH 2-5C	5,819.49	45.0	1.400	Circle	24.0	0.013	12.10	8.31	5,821.37	5,820.88
STMH 2-5C	5,819.49	STMH 2-5B	5,815.51	289.0	1.377	Circle	30.0	0.013	15.60	8.75	5,820.82	5,816.99
INLET 4-5B	5,819.70	STMH 2-5C	5,819.52	18.0	1.000	Circle	18.0	0.013	3.50	5.35	5,820.87	5,820.87
INLET 5-5B	5,828.30	STMH 2-5D	5,820.22	293.0	2.758	Circle	18.0	0.013	3.50	7.71	5,829.01	5,821.44
INLET 4-5C	5,815.79	STMH 2-5B	5,815.61	18.0	1.000	Circle	18.0	0.013	2.50	4.88	5,816.99	5,816.98
INLET 6-5	5,821.14	STMH 3-5A	5,812.67	247.0	3.429	Circle	30.0	0.013	8.50	10.23	5,822.11	5,813.94
STMH 3-5A	5,812.67	STMH 2-5	5,811.37	48.0	2.708	Circle	30.0	0.013	13.30	10.69	5,813.90	5,813.34
INLET 6-5A	5,812.86	STMH 3-5A	5,812.67	19.0	1.000	Circle	18.0	0.013	2.70	4.98	5,813.93	5,813.93
INLET 6-5B	5,812.86	STMH 3-5A	5,812.67	19.0	1.000	Circle	18.0	0.013	2.10	4.64	5,813.92	5,813.93
STMH 4-9	5,813.94	STMH 1-11	5,814.80	172.3	-0.499	Circle	18.0	0.013	5.60	4.61	5,815.77	5,815.24
INL 2-9	5,792.34	FOREBAY B	5,790.35	32.3	6.169	Circle	30.0	0.013	19.26	15.95	5,793.83	5,791.21
STMH 3-9	5,808.00	INL 2-9	5,792.50	176.4	8.789	Circle	30.0	0.013	19.26	18.10	5,809.49	5,793.17
INL-20	5,826.54	STMH-19	5,825.91	82.4	0.765	Circle	18.0	0.013	2.17	4.25	5,827.10	5,826.41

FlexTable: Conduit Table

Start Node	Invert (Start) (ft)	Stop Node	Invert (Stop) (ft)	Length (User Defined) (ft)	Slope (Calculated) (%)	Section Type	Diameter (in)	Manning's n	Flow (cfs)	Velocity (ft/s)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
STMH-19	5,825.71	STMH-18	5,825.05	131.3	0.500	Circle	18.0	0.013	2.17	3.65	5,826.26	5,825.61
STMH-18	5,824.85	INL-17	5,824.14	142.2	0.500	Circle	18.0	0.013	2.17	3.65	5,825.41	5,824.73
INL-17	5,823.94	FUTURE STMH	5,819.36	179.3	2.555	Circle	18.0	0.013	4.27	7.94	5,824.73	5,819.88
INL-16A	5,820.65	FUTURE STMH	5,819.36	11.2	11.494	Circle	18.0	0.013	4.59	13.87	5,821.47	5,819.81
FUTURE STMH	5,818.66	STMH 4-9	5,816.72	86.4	2.243	Circle	24.0	0.013	8.86	9.08	5,819.72	5,817.42
MH-34	5,816.68	INL 2-10	5,817.68	19.2	-5.211	Circle	18.0	0.013	2.80	9.08	5,818.31	5,817.36
INL 2-10A	5,817.68	MH-34	5,816.68	19.2	5.208	Circle	18.0	0.013	2.00	8.23	5,818.21	5,817.36
STMH 4-9	5,816.23	MH-34	5,816.48	50.3	-0.497	Circle	18.0	0.013	4.80	4.46	5,817.36	5,817.07
STMH 4-9	5,813.75	STMH 3-9	5,808.10	395.0	1.430	Circle	30.0	0.013	19.26	9.39	5,815.24	5,809.19
STMH 1-11	5,814.80	INL 2-11	5,815.00	19.2	-1.042	Circle	18.0	0.013	3.00	5.20	5,815.70	5,815.77
STMH 1-11	5,814.80	INL 2-11A	5,815.00	19.2	-1.042	Circle	18.0	0.013	2.60	5.00	5,815.73	5,815.77

FlexTable: Conduit Table 100 YR STORM EVENT

Start Node	Invert (Start) (ft)	Stop Node	Invert (Stop) (ft)	Length (User Defined) (ft)	Slope (Calculated) (%)	Section Type	Diameter (in)	Manning's n	Flow (cfs)	Velocity (ft/s)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
STMH 6-4	5,834.91	INLET 6-4	5,832.53	120.0	1.98	Circle	36	0.013	47.81	13.34	5,837.16	5,834.11
INLET 6-4	5,832.33	STMH 5-4	5,827.71	278.0	1.66	Circle	36	0.013	51.31	12.70	5,834.66	5,829.38
FES 2-5	5,834.54	INLET 8-5	5,834.00	7.7	7.01	Circle	24	0.013	24.64	18.14	5,836.29	5,835.76
INLET 5-4	5,829.34	STMH 5-4	5,828.83	52.0	0.99	Circle	18	0.013	9.80	6.72	5,830.55	5,829.98
INLET 3-4	5,825.42	STMH 4-4	5,825.23	20.0	0.95	Circle	18	0.013	11.20	6.34	5,828.21	5,827.98
INLET 1-4	5,823.04	DIVERSION - STMH 2-4	5,821.92	65.0	1.72	Circle	18	0.013	7.70	4.36	5,825.66	5,825.31
INLET 4-4	5,825.42	STMH 4-4	5,825.23	20.0	0.95	Circle	18	0.013	2.40	1.36	5,827.99	5,827.98
INLET 2-6	5,814.55	INLET 1-6	5,814.15	80.0	0.50	Circle	18	0.013	8.10	4.58	5,816.12	5,815.65
INLET 2-3	5,836.69	INLET 1-3	5,831.04	94.0	6.01	Circle	24	0.013	9.00	12.99	5,837.76	5,832.27
FES 2-4	5,842.00	STMH 6-4	5,835.11	221.0	3.12	Circle	36	0.013	47.81	15.79	5,844.25	5,837.57
STMH 5-4	5,827.41	STMH 4-4	5,822.96	163.0	2.73	Circle	36	0.013	63.33	16.13	5,829.97	5,827.98
INLET 4-5	5,812.96	STMH 2-5A	5,812.27	19.0	3.63	Circle	18	0.013	8.90	5.04	5,815.78	5,815.64
INLET 5-5	5,813.90	STMH 2-5	5,811.47	49.0	4.96	Circle	18	0.013	9.10	5.15	5,815.90	5,815.53
STMH 4-4	5,822.16	STMH 3-4	5,821.56	79.0	0.76	Circle	36	0.013	76.93	10.88	5,827.98	5,826.93
STMH 3-4	5,821.46	DIVERSION - STMH 2-4	5,820.65	76.0	1.07	Circle	36	0.013	84.93	12.02	5,826.54	5,825.31
INLET 2-4	5,822.07	STMH 3-4	5,821.56	56.0	0.91	Circle	18	0.013	8.00	4.53	5,827.03	5,826.71
INLET 8-5	5,833.51	INLET 7-5	5,827.49	173.0	3.48	Circle	24	0.013	24.64	13.95	5,835.26	5,830.99
INLET 4-5A	5,821.14	STMH 2-5E	5,820.90	20.0	1.20	Circle	18	0.013	10.20	5.77	5,823.36	5,823.17
INLET 5-5A	5,821.14	STMH 2-5E	5,820.90	20.0	1.20	Circle	18	0.013	10.62	6.01	5,823.38	5,823.18
STMH 2-5	5,811.37	INLET 3-5	5,810.99	16.0	2.38	Circle	42	0.013	123.06	17.88	5,814.71	5,814.57
INLET 7-5	5,827.14	STMH 4-5	5,822.27	104.6	4.66	Circle	24	0.013	34.84	11.09	5,829.88	5,827.40
STMH 4-5	5,822.27	INLET 6-5	5,821.44	23.0	3.61	Circle	24	0.013	34.84	11.09	5,826.05	5,825.51
STMH 2-5A	5,812.17	STMH 2-5	5,811.47	50.0	1.40	Circle	36	0.013	48.02	6.79	5,815.56	5,815.30
STMH 2-5B	5,815.51	STMH 2-5A	5,812.17	241.0	1.39	Circle	30	0.013	39.12	10.95	5,817.62	5,815.66
DIVERSION - STMH 2-4	5,820.42	STMH 1-4	5,818.85	72.0	2.17	Circle	36	0.013	69.03	15.06	5,823.06	5,820.88
STMH 1-4	5,818.23	FES 1-4	5,818.00	28.0	0.82	Circle	36	0.013	69.03	9.77	5,821.05	5,820.64
INLET 1-3	5,829.94	STMH 1-3	5,829.37	18.4	3.10	Circle	24	0.013	22.50	13.06	5,831.63	5,831.16
STMH 1-3	5,829.37	O-1	5,829.00	12.0	3.08	Circle	24	0.013	22.50	13.04	5,831.06	5,830.90
INLET 5-4A	5,829.26	STMH 5-4	5,828.83	43.0	1.00	Circle	18	0.013	2.22	4.71	5,829.92	5,829.97
STMH 2-5E	5,820.80	STMH 2-5D	5,820.12	44.0	1.55	Circle	24	0.013	20.82	6.63	5,822.95	5,822.58
STMH 2-5D	5,820.12	STMH 2-5C	5,819.49	45.0	1.40	Circle	24	0.013	28.32	9.01	5,822.34	5,821.64
STMH 2-5C	5,819.49	STMH 2-5B	5,815.51	289.0	1.38	Circle	30	0.013	35.22	10.71	5,821.51	5,817.73
INLET 4-5B	5,819.70	STMH 2-5C	5,819.52	18.0	1.00	Circle	18	0.013	6.90	3.90	5,821.69	5,821.62
INLET 5-5B	5,828.30	STMH 2-5D	5,820.22	293.0	2.76	Circle	18	0.013	7.50	9.49	5,829.36	5,822.56
INLET 4-5C	5,815.79	STMH 2-5B	5,815.61	18.0	1.00	Circle	18	0.013	3.90	2.21	5,817.71	5,817.68
INLET 6-5	5,821.14	STMH 3-5A	5,812.67	247.0	3.43	Circle	30	0.013	54.44	11.09	5,824.34	5,819.99
STMH 3-5A	5,812.67	STMH 2-5	5,811.37	48.0	2.71	Circle	30	0.013	65.94	13.43	5,816.29	5,815.04
INLET 6-5A	5,812.86	STMH 3-5A	5,812.67	19.0	1.00	Circle	18	0.013	6.20	3.51	5,820.05	5,819.99
INLET 6-5B	5,812.86	STMH 3-5A	5,812.67	19.0	1.00	Circle	18	0.013	5.30	3.00	5,820.04	5,819.99
DIVERSION - STMH 2-4	5,820.42	STMH 1-12	5,820.26	32.0	0.49	Circle	30	0.013	23.60	0.00	5,823.64	5,823.53
STMH 1-12	5,820.16	STMH 2-12	5,819.90	52.0	0.50	Circle	30	0.013	23.60	6.58	5,822.55	5,822.40
STMH 2-12	5,819.80	STMH 3-12	5,818.95	168.0	0.51	Circle	30	0.013	23.60	6.62	5,821.51	5,820.65
STMH 3-12	5,818.85	STMH 4-12	5,817.87	196.0	0.50	Circle	30	0.013	23.60	6.58	5,820.56	5,819.52
STMH 4-12	5,817.77	STMH 5-12	5,816.66	202.0	0.55	Circle	30	0.013	23.60	6.84	5,819.42	5,818.41
STMH 5-12	5,816.66	STMH 6-12	5,808.94	286.0	2.70	Circle	30	0.013	23.60	12.51	5,818.31	5,813.17
STMH 6-12	5,812.33	STMH 7-12	5,812.68	71.0	-0.49	Circle	18	0.013	5.80	4.62	5,813.68	5,813.26

FlexTable: Conduit Table

Start Node	Invert (Start) (ft)	Stop Node	Invert (Stop) (ft)	Length (User Defined) (ft)	Slope (Calculated) (%)	Section Type	Diameter (in)	Manning's n	Flow (cfs)	Velocity (ft/s)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
INLET 1-6	5,814.05	DIVERSION - STMH 8-12	5,813.06	16.0	6.19	Circle	24	0.013	15.40	15.27	5,815.46	5,813.98
STMH 6-12	5,808.84	STMH 9-12	5,807.59	249.0	0.50	Circle	42	0.013	29.40	3.06	5,812.98	5,812.77
INLET 2-5	5,808.45	STMH 10-12	5,806.11	24.0	9.75	Circle	24	0.013	23.50	7.48	5,812.90	5,812.64
STMH 10-12	5,806.11	INLET 1-5	5,808.34	66.0	-3.38	Circle	24	0.013	15.10	4.81	5,812.94	5,812.64
STMH 9-12	5,807.49	STMH 10-12	5,806.11	275.0	0.50	Circle	48	0.013	29.40	2.34	5,812.76	5,812.64
STMH 10-12	5,806.01	STMH 11-12	5,805.50	103.0	0.50	Circle	48	0.013	68.00	5.41	5,812.62	5,812.39
STMH 13-12	5,792.21	STMH 14-12	5,790.94	255.0	0.50	Circle	60	0.013	185.43	9.44	5,798.76	5,797.47
STMH 14-12	5,790.84	FES 1-5	5,790.21	126.0	0.50	Circle	60	0.013	185.43	9.44	5,797.29	5,796.65
STMH 12-12	5,795.80	STMH 13-12	5,792.31	233.0	1.50	Circle	60	0.013	185.43	16.85	5,799.70	5,798.94
DIVERSION - STMH 8-12	5,812.96	STMH 7-12	5,812.78	35.0	0.51	Circle	18	0.013	5.80	0.00	5,814.67	5,814.56
STMH 11-12	5,805.38	STMH 11A-12	5,802.37	117.0	2.57	Circle	60	0.013	204.96	21.17	5,809.46	5,806.46
STMH 11A-12	5,802.27	STMH 12-12	5,795.90	318.0	2.00	Circle	60	0.013	204.96	19.27	5,806.35	5,802.31
DIVERSION - STMH 8-12	5,812.96	STMH-8A	5,806.30	116.0	5.74	Circle	24	0.013	9.60	13.01	5,814.07	5,808.33
STMH-8A	5,806.20	FES1-6	5,806.00	40.0	0.50	Circle	24	0.013	9.60	3.06	5,808.33	5,808.26
INLET 3-5	5,810.89	MH-1-5A	5,808.93	105.5	1.86	Circle	48	0.013	136.96	16.85	5,814.37	5,813.25
MH-1-5A	5,808.93	STMH 11-12	5,805.47	95.1	3.64	Circle	48	0.013	136.96	10.90	5,813.25	5,812.39
OUTLET STRUCTURE	5,787.19	O-2	5,785.30	127.9	1.48	Circle	36	0.013	59.30	12.52	5,789.68	5,787.26
CB-12	5,792.34	FOREBAY B	5,790.35	32.3	6.16	Circle	30	0.013	33.00	6.72	5,796.88	5,796.67
STMH 4-9	5,813.75	STMH 3-9	5,808.10	395.0	1.43	Circle	30	0.013	51.90	11.29	5,816.07	5,810.31
STMH 4-9	5,816.23	STMH 1-10	5,816.48	50.3	-0.50	Circle	18	0.013	11.30	6.39	5,818.21	5,817.51
INL 2-10A	5,817.68	STMH 1-10	5,816.68	19.2	5.21	Circle	18	0.013	5.20	10.84	5,818.56	5,818.21
STMH 1-10	5,816.68	INL 2-10	5,817.68	19.2	-5.21	Circle	18	0.013	6.10	11.33	5,818.63	5,818.21
STMH-16	5,818.66	STMH 4-9	5,814.25	113.7	3.88	Circle	24	0.013	25.80	14.70	5,820.44	5,816.07
INL-16A	5,820.65	STMH-16	5,819.36	11.2	11.49	Circle	18	0.013	12.12	18.23	5,821.97	5,820.18
INL-17	5,823.94	STMH-16	5,819.36	179.3	2.55	Circle	18	0.013	13.68	10.59	5,825.31	5,820.39
STMH-18	5,824.85	INL-17	5,824.14	142.2	0.50	Circle	18	0.013	7.42	4.79	5,826.08	5,825.31
STMH-19	5,825.71	STMH-18	5,825.05	131.3	0.50	Circle	18	0.013	7.42	4.79	5,826.93	5,826.11
INL-20	5,826.54	STMH-19	5,825.91	82.4	0.76	Circle	18	0.013	7.42	5.78	5,827.60	5,826.93
STMH 3-9	5,808.00	INL 2-9	5,792.50	176.4	8.79	Circle	30	0.013	51.90	23.79	5,810.32	5,793.65
INL 2-9	5,792.34	FOREBAY B	5,790.35	32.3	6.17	Circle	30	0.013	51.90	20.84	5,794.66	5,791.94
STMH 4-9	5,813.94	STMH 1-11	5,814.80	172.3	-0.50	Circle	18	0.013	14.80	8.38	5,819.49	5,816.07
STMH 1-11	5,814.80	INL 2-11A	5,815.00	19.2	-1.04	Circle	18	0.013	7.00	3.96	5,819.58	5,819.49
STMH 1-11	5,814.80	INL 2-11	5,815.00	19.2	-1.04	Circle	18	0.013	7.80	4.41	5,819.60	5,819.49

Temporary Swale East of Residential Site - Upper

Project Description

Friction Method	Manning Formula
Solve For	Normal Depth

Input Data

Roughness Coefficient	0.035	
Channel Slope	0.01000	ft/ft
Left Side Slope	0.20	ft/ft (H:V)
Right Side Slope	0.20	ft/ft (H:V)
Bottom Width	4.00	ft
Discharge	9.80	ft³/s

Results

Normal Depth	0.79	ft
Flow Area	3.29	ft²
Wetted Perimeter	5.62	ft
Hydraulic Radius	0.59	ft
Top Width	4.32	ft
Critical Depth	0.57	ft
Critical Slope	0.02837	ft/ft
Velocity	2.98	ft/s
Velocity Head	0.14	ft
Specific Energy	0.93	ft
Froude Number	0.60	
Flow Type	Subcritical	

GVF Input Data

Downstream Depth	0.00	ft
Length	0.00	ft
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	ft
Profile Description		
Profile Headloss	0.00	ft
Downstream Velocity	Infinity	ft/s
Upstream Velocity	Infinity	ft/s
Normal Depth	0.79	ft
Critical Depth	0.57	ft
Channel Slope	0.01000	ft/ft

Temp Swale East of Street E - Top

GVF Output Data

Critical Slope 0.02837 ft/ft

Temporary Swale East of Residential Site - Lower

Project Description

Friction Method	Manning Formula
Solve For	Normal Depth

Input Data

Roughness Coefficient	0.050	
Channel Slope	0.10000	ft/ft
Left Side Slope	0.20	ft/ft (H:V)
Right Side Slope	0.20	ft/ft (H:V)
Bottom Width	4.00	ft
Discharge	9.80	ft³/s

Results

Normal Depth	0.48	ft
Flow Area	1.95	ft²
Wetted Perimeter	4.97	ft
Hydraulic Radius	0.39	ft
Top Width	4.19	ft
Critical Depth	0.57	ft
Critical Slope	0.05791	ft/ft
Velocity	5.03	ft/s
Velocity Head	0.39	ft
Specific Energy	0.87	ft
Froude Number	1.30	
Flow Type	Supercritical	

GVF Input Data

Downstream Depth	0.00	ft
Length	0.00	ft
Number Of Steps	0	

GVF Output Data


Upstream Depth	0.00	ft
Profile Description		
Profile Headloss	0.00	ft
Downstream Velocity	Infinity	ft/s
Upstream Velocity	Infinity	ft/s
Normal Depth	0.48	ft
Critical Depth	0.57	ft
Channel Slope	0.10000	ft/ft

Temp Swale East of Street E - Bottom

GVF Output Data

Critical Slope 0.05791 ft/ft


TEMPORARY SWALE (EAST OF RESIDENTIAL SITE)

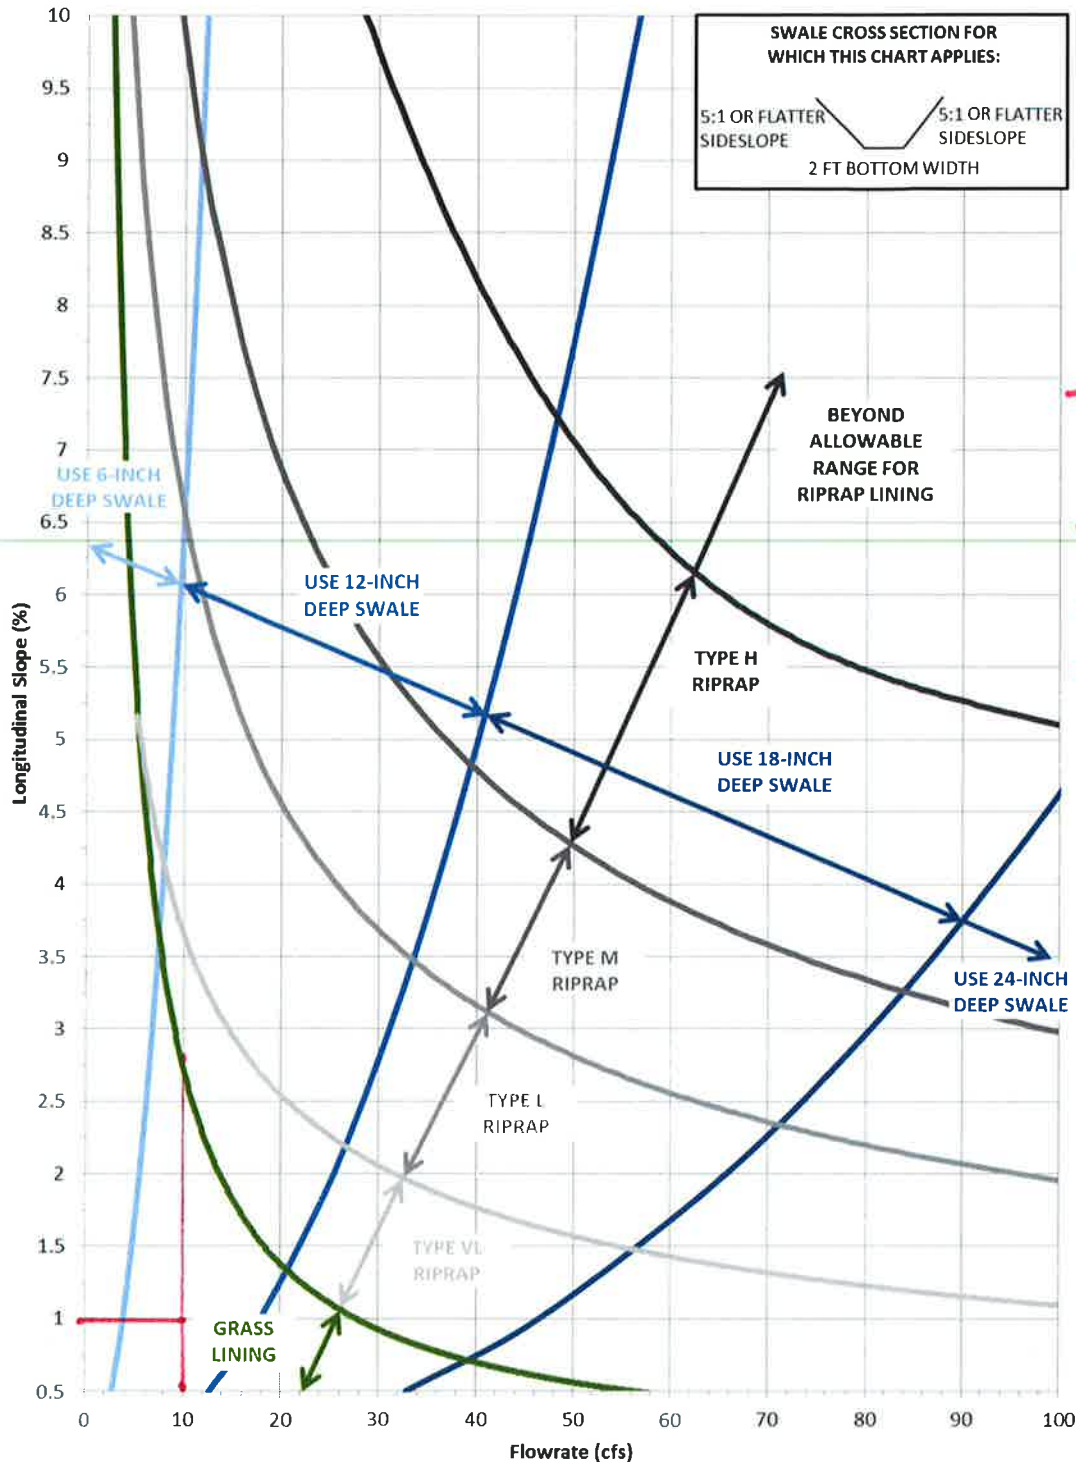

Upper
 $Q = 9.8 \text{ cfs}$
 $s = 1\%$
 - 1' Deep to Match Lower
 - Grass lined
 - 2' Bottom
 - 5:1 Sides

Figure 8-22. Swale stability chart; 2- to 4-foot bottom width and side slopes between 5:1 and 10:1
 (Note: Riprap classifications refer to gradation for riprap used in soil riprap or void-filled riprap. See Figure 8-34 for gradations.) (Source: Muller Engineering Company)


TEMPORARY SWALE (EAST OF RESIDENTIAL SITE)

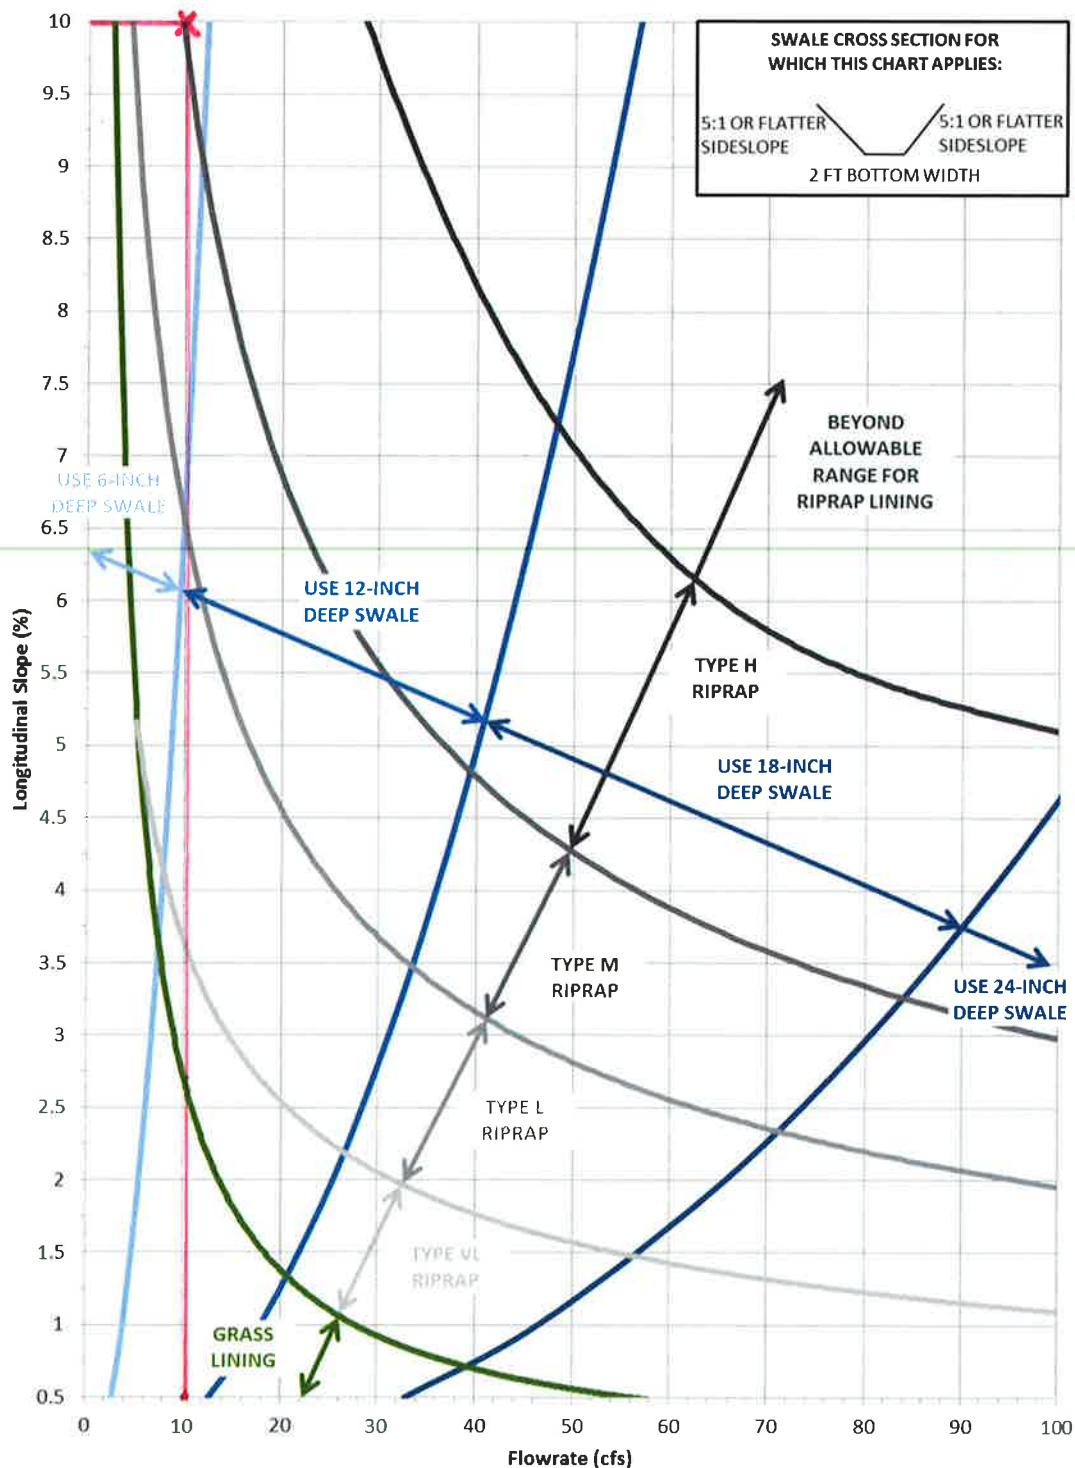


Lower
 $Q = 9.8 \text{ cfs}$
 $S = 10\%$
 1' Deep
 Type M Riprap
 2' Bottom
 5:1 Sides

Figure 8-22. Swale stability chart; 2- to 4-foot bottom width and side slopes between 5:1 and 10:1
 (Note: Riprap classifications refer to gradation for riprap used in soil riprap or void-filled riprap. See Figure 8-34 for gradations.) (Source: Muller Engineering Company)

FOR REFERENCE ONLY. TO BE CONSTRUCTED AS PART OF FILING 1.

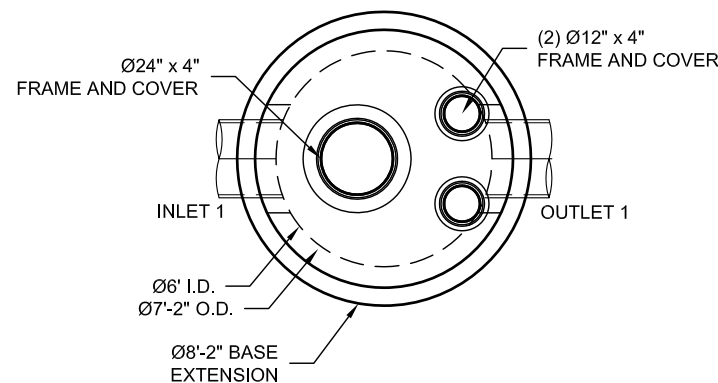


PLAN VIEW

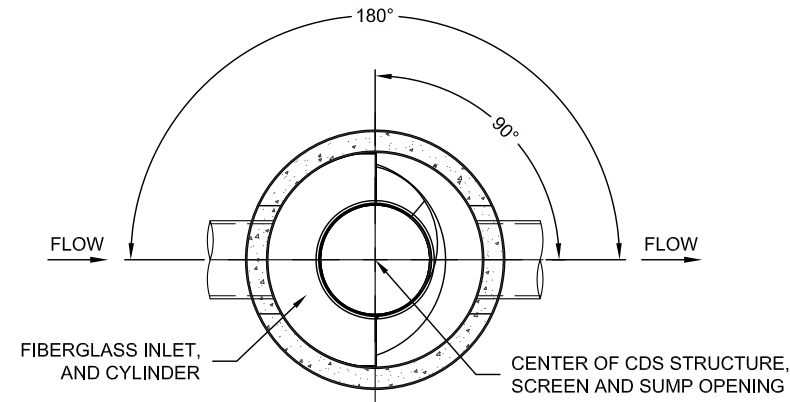

SECTION A-A

- INTERNAL COMPONENTS TO BE INSTALLED BY CONTECH ON SITE

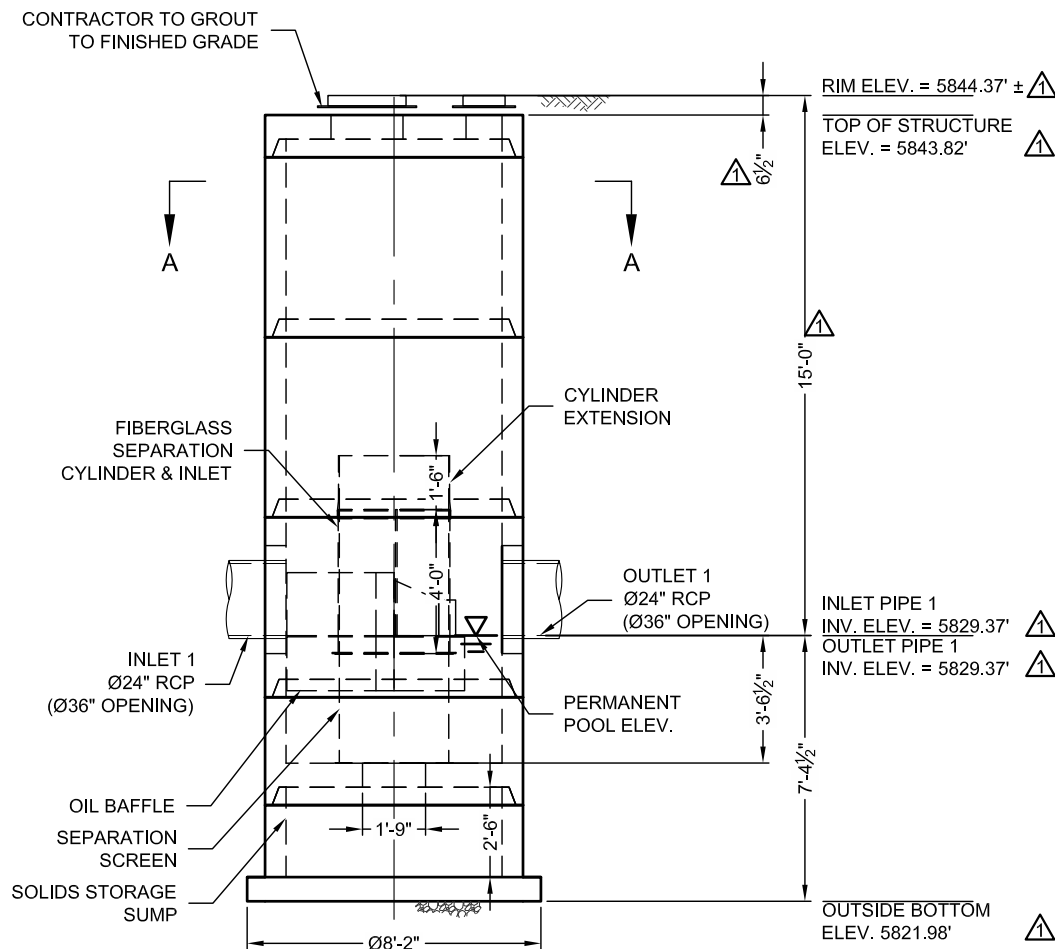

ELEVATION VIEW

MATERIAL LIST (PROVIDED BY CONTECH)		
COUNT	DESCRIPTION	INSTALLED BY
1	FIBERGLASS INLET AND CYLINDER	CONTECH
1	2400 micron, 3' O.D. x 3.04' SEP. SCREEN	CONTECH
1	CYLINDER EXTENSION	CONTRACTOR
1	SEALANT FOR JOINTS (BY PRECASTER)	CONTRACTOR
1	Ø24" x 4" FRAME & COVER, EJ#41600389, OR EQUIV.	CONTRACTOR
2	Ø12" x 4" FRAME & COVER, EJ#41610201, OR EQUIV.	CONTRACTOR

SITE DESIGN DATA	
WATER QUALITY FLOW RATE	0 CFS
PEAK FLOW RATE	29.2 CFS
RETURN PERIOD OF PEAK FLOW	100 YRS

GENERAL NOTES

1. CONTECH TO PROVIDE ALL MATERIALS UNLESS NOTED OTHERWISE.
2. FOR FABRICATION DRAWINGS WITH DETAILED STRUCTURE DIMENSIONS AND WEIGHT, PLEASE CONTACT YOUR CONTECH ENGINEERED SOLUTIONS LLC REPRESENTATIVE. www.ContechES.com
3. CDS WATER QUALITY STRUCTURE SHALL BE IN ACCORDANCE WITH ALL DESIGN DATA AND INFORMATION CONTAINED IN THIS DRAWING. CONTRACTOR TO CONFIRM STRUCTURE MEETS REQUIREMENTS OF PROJECT.
4. STRUCTURE SHALL MEET AASHTO HS-20 LOAD RATING, ASSUMING EARTH COVER OF 0' - 2', AND GROUNDWATER ELEVATION AT, OR BELOW, THE OUTLET PIPE INVERT ELEVATION. ENGINEER OF RECORD TO CONFIRM ACTUAL GROUNDWATER ELEVATION. CASTINGS SHALL MEET AASHTO M306 AND BE CAST WITH THE CONTECH LOGO.
5. IF REQUIRED, PVC HYDRAULIC SHEAR PLATE IS PLACED ON SHELF AT BOTTOM OF SCREEN CYLINDER.
REMOVE AND REPLACE AS NECESSARY DURING MAINTENANCE CLEANING.
6. CDS STRUCTURE SHALL BE PRECAST CONCRETE CONFORMING TO ASTM C-478 AND AASHTO LOAD FACTOR DESIGN METHOD.

INSTALLATION NOTES

- A. ANY SUB-BASE, BACKFILL DEPTH, AND/OR ANTI-FLOTATION PROVISIONS ARE SITE-SPECIFIC DESIGN CONSIDERATIONS AND SHALL BE SPECIFIED BY ENGINEER OF RECORD.
- B. CONTRACTOR TO PROVIDE EQUIPMENT WITH SUFFICIENT LIFTING AND REACH CAPACITY TO LIFT AND SET THE CDS MANHOLE STRUCTURE.
- C. CONTRACTOR TO INSTALL JOINT SEALANT BETWEEN ALL STRUCTURE SECTIONS AND ASSEMBLE STRUCTURE.
- D. CONTRACTOR TO PROVIDE, INSTALL, AND GROUT INLET AND OUTLET PIPE(S). MATCH PIPE INVERTS WITH ELEVATIONS SHOWN. ALL PIPE CENTERLINES TO MATCH PIPE OPENING CENTERLINES.
- E. CONTRACTOR TO TAKE APPROPRIATE MEASURES TO ASSURE UNIT IS WATER TIGHT, HOLDING WATER TO FLOWLINE INVERT MINIMUM. IT IS SUGGESTED THAT ALL JOINTS BELOW PIPE INVERTS ARE GROUTED.

1 STRUCTURE WEIGHT
APPROXIMATE HEAVIEST PICK = 10000 LBS.
STRUCTURE IS DELIVERED IN 6 PIECES

MAX FOOTPRINT = Ø8'-2"

CONTECH
CONTRACT
DRAWING

LPICO
LAYOUT 1A
3030-6-FGIS
1026 / FI72886


The design and information shown on this drawing is provided as a service to the project owner, engineer and contractor by CONTECH Construction Products Inc. or one of its affiliated companies ("CONTECH"). Neither CONTECH nor its affiliates warrant, represent or guarantee that the design or information reproduced or modified in any manner without the prior written consent of CONTECH. Failure to comply is done at the users own risk and CONTECH expressly disclaims any liability or responsibility for such use. It is recommended that the supplied information upon which the drawing is based and actual field conditions are encountered as site work progresses, these conditions may require a re-evaluation of the design. CONTECH immediately disclaims any liability for designs based on missing, incomplete or inaccurate information supplied by others.

1	7/28/16	IN/OUTLET & RIM ELEVATIONS	KJW	
MARK	DATE	REVISION DESCRIPTION	BY	


CDS3030-6-C - 542946-10
COMPARK SOUTH
PARKER, CO
for SYSTEM: STMH 1-3

 CONTECH ENGINEERED SOLUTIONS LLC www.Conteches.com 2201 W. Royal Lane, Suite 260, Irving, TX 75063 972-590-2039 FAX		 THIS PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 7,048,644; 7,252,515; 7,399,636; 7,431,782; 7,431,783; 7,431,784; 7,431,785; 7,431,786; 7,431,787; 7,431,788; 7,431,789; 7,431,790; 7,431,791; 7,431,792; 7,431,793; 7,431,794; 7,431,795; 7,431,796; 7,431,797; 7,431,798; 7,431,799; 7,431,800; 7,431,801; 7,431,802; 7,431,803; 7,431,804; 7,431,805; 7,431,806; 7,431,807; 7,431,808; 7,431,809; 7,431,810; 7,431,811; 7,431,812; 7,431,813; 7,431,814; 7,431,815; 7,431,816; 7,431,817; 7,431,818; 7,431,819; 7,431,820; 7,431,821; 7,431,822; 7,431,823; 7,431,824; 7,431,825; 7,431,826; 7,431,827; 7,431,828; 7,431,829; 7,431,830; 7,431,831; 7,431,832; 7,431,833; 7,431,834; 7,431,835; 7,431,836; 7,431,837; 7,431,838; 7,431,839; 7,431,840; 7,431,841; 7,431,842; 7,431,843; 7,431,844; 7,431,845; 7,431,846; 7,431,847; 7,431,848; 7,431,849; 7,431,850; 7,431,851; 7,431,852; 7,431,853; 7,431,854; 7,431,855; 7,431,856; 7,431,857; 7,431,858; 7,431,859; 7,431,860; 7,431,861; 7,431,862; 7,431,863; 7,431,864; 7,431,865; 7,431,866; 7,431,867; 7,431,868; 7,431,869; 7,431,870; 7,431,871; 7,431,872; 7,431,873; 7,431,874; 7,431,875; 7,431,876; 7,431,877; 7,431,878; 7,431,879; 7,431,880; 7,431,881; 7,431,882; 7,431,883; 7,431,884; 7,431,885; 7,431,886; 7,431,887; 7,431,888; 7,431,889; 7,431,890; 7,431,891; 7,431,892; 7,431,893; 7,431,894; 7,431,895; 7,431,896; 7,431,897; 7,431,898; 7,431,899; 7,431,900; 7,431,901; 7,431,902; 7,431,903; 7,431,904; 7,431,905; 7,431,906; 7,431,907; 7,431,908; 7,431,909; 7,431,910; 7,431,911; 7,431,912; 7,431,913; 7,431,914; 7,431,915; 7,431,916; 7,431,917; 7,431,918; 7,431,919; 7,431,920; 7,431,921; 7,431,922; 7,431,923; 7,431,924; 7,431,925; 7,431,926; 7,431,927; 7,431,928; 7,431,929; 7,431,930; 7,431,931; 7,431,932; 7,431,933; 7,431,934; 7,431,935; 7,431,936; 7,431,937; 7,431,938; 7,431,939; 7,431,940; 7,431,941; 7,431,942; 7,431,943; 7,431,944; 7,431,945; 7,431,946; 7,431,947; 7,431,948; 7,431,949; 7,431,950; 7,431,951; 7,431,952; 7,431,953; 7,431,954; 7,431,955; 7,431,956; 7,431,957; 7,431,958; 7,431,959; 7,431,960; 7,431,961; 7,431,962; 7,431,963; 7,431,964; 7,431,965; 7,431,966; 7,431,967; 7,431,968; 7,431,969; 7,431,970; 7,431,971; 7,431,972; 7,431,973; 7,431,974; 7,431,975; 7,431,976; 7,431,977; 7,431,978; 7,431,979; 7,431,980; 7,431,981; 7,431,982; 7,431,983; 7,431,984; 7,431,985; 7,431,986; 7,431,987; 7,431,988; 7,431,989; 7,431,990; 7,431,991; 7,431,992; 7,431,993; 7,431,994; 7,431,995; 7,431,996; 7,431,997; 7,431,998; 7,431,999; 7,432,000; 7,432,001; 7,432,002; 7,432,003; 7,432,004; 7,432,005; 7,432,006; 7,432,007; 7,432,008; 7,432,009; 7,432,010; 7,432,011; 7,432,012; 7,432,013; 7,432,014; 7,432,015; 7,432,016; 7,432,017; 7,432,018; 7,432,019; 7,432,020; 7,432,021; 7,432,022; 7,432,023; 7,432,024; 7,432,025; 7,432,026; 7,432,027; 7,432,028; 7,432,029; 7,432,030; 7,432,031; 7,432,032; 7,432,033; 7,432,034; 7,432,035; 7,432,036; 7,432,037; 7,432,038; 7,432,039; 7,432,040; 7,432,041; 7,432,042; 7,432,043; 7,432,044; 7,432,045; 7,432,046; 7,432,047; 7,432,048; 7,432,049; 7,432,050; 7,432,051; 7,432,052; 7,432,053; 7,432,054; 7,432,055; 7,432,056; 7,432,057; 7,432,058; 7,432,059; 7,432,060; 7,432,061; 7,432,062; 7,432,063; 7,432,064; 7,432,065; 7,432,066; 7,432,067; 7,432,068; 7,432,069; 7,432,070; 7,432,071; 7,432,072; 7,432,073; 7,432,074; 7,432,075; 7,432,076; 7,432,077; 7,432,078; 7,432,079; 7,432,080; 7,432,081; 7,432,082; 7,432,083; 7,432,084; 7,432,085; 7,432,086; 7,432,087; 7,432,088; 7,432,089; 7,432,090; 7,432,091; 7,432,092; 7,432,093; 7,432,094; 7,432,095; 7,432,096; 7,432,097; 7,432,098; 7,432,099; 7,432,100; 7,432,101; 7,432,102; 7,432,103; 7,432,104; 7,432,105; 7,432,106; 7,432,107; 7,432,108; 7,432,109; 7,432,110; 7,432,111; 7,432,112; 7,432,113; 7,432,114; 7,432,115; 7,432,116; 7,432,117; 7,432,118; 7,432,119; 7,432,120; 7,432,121; 7,432,122; 7,432,123; 7,432,124; 7,432,125; 7,432,126; 7,432,127; 7,432,128; 7,432,129; 7,432,130; 7,432,131; 7,432,132; 7,4
--	--	--


FOR REFERENCE ONLY. TO BE CONSTRUCTED AS PART OF FILING 1.

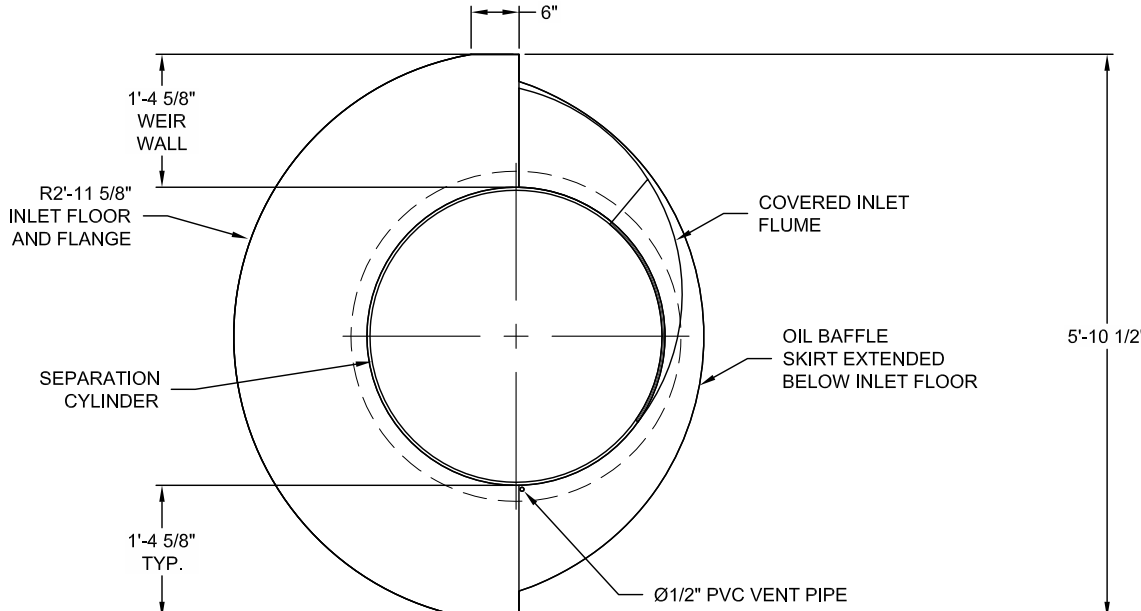


PLAN VIEW

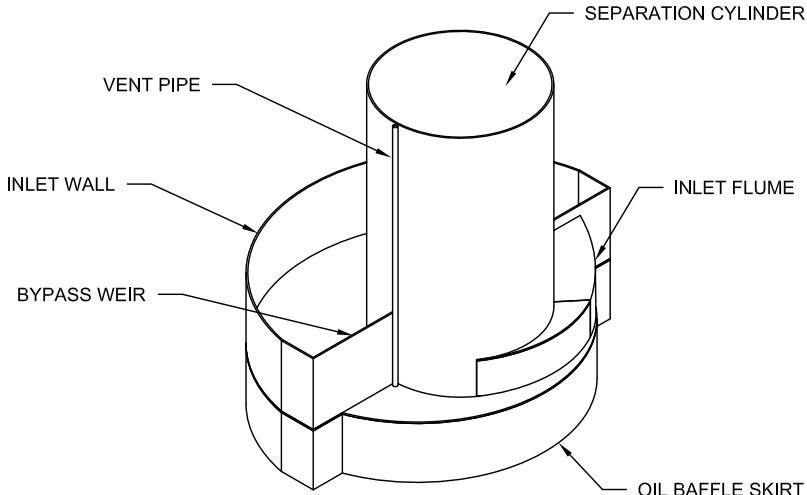


ASSEMBLY TOP VIEW
N.T.S.

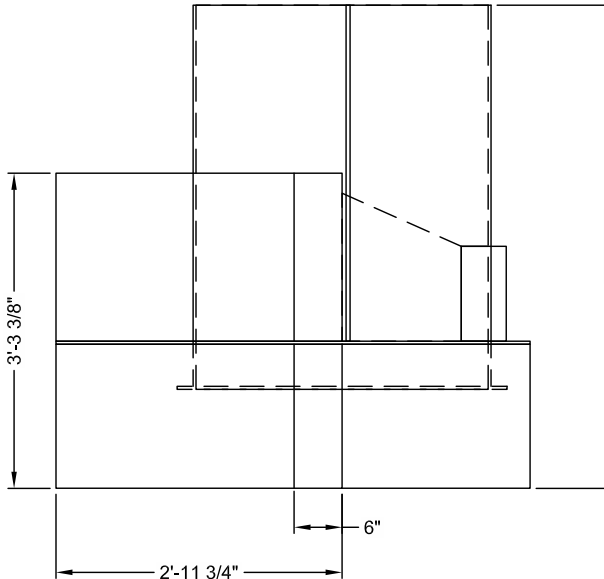

ELEVATION VIEW

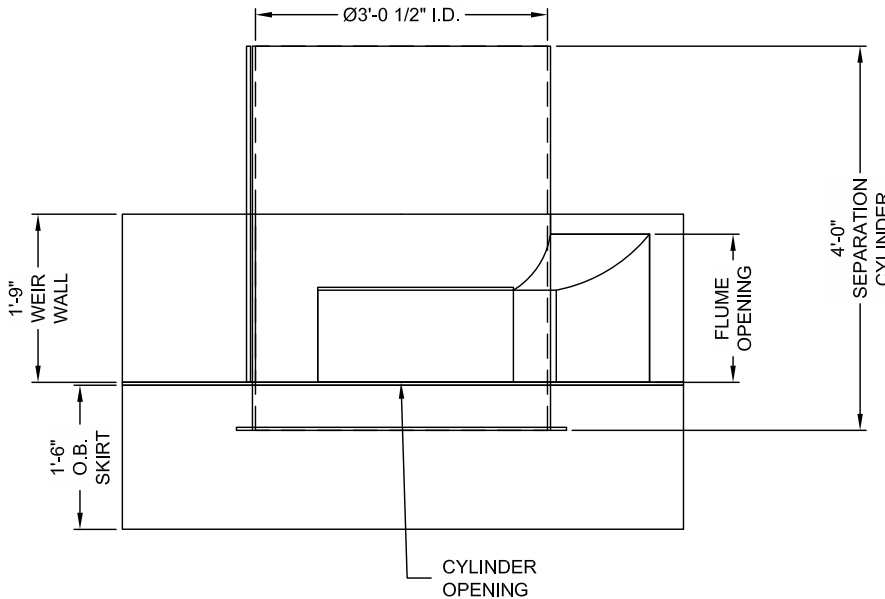

SIDE VIEW

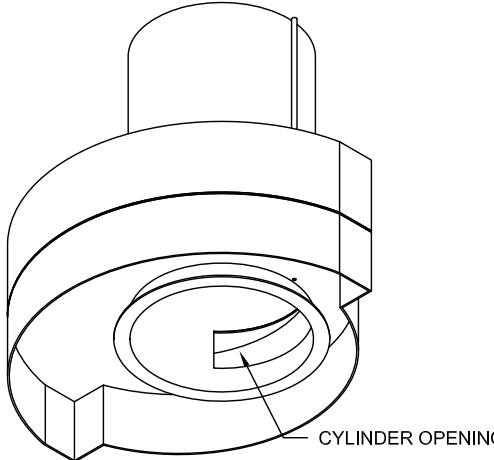

ASSEMBLY BOTTOM VIEW
N.T.S.

The design and information shown on this drawing is provided as a service to the project owner, engineer and contractor by CONTECH CONSTRUCTION Products Inc. or one of its affiliated companies ("CONTECH"). Neither this drawing, nor any part thereof, may be used, reproduced or modified in any manner without the prior written consent of CONTECH. Failure to comply with these terms and conditions expressly and exclusively disclaims any liability or responsibility for such use.

If discrepancies between the supplied information upon which the drawing is based and actual field conditions are encountered as site work progresses, these discrepancies must be reported to CONTECH immediately. CONTECH shall not be held responsible or accept any liability for designs based on mistaken or incomplete information supplied by others.

[illegible]

CDS3030-6-C - 542946-10
COMPARK SOUTH
PARKER, CO
for SYSTEM: STMH 1-3




ENGINEERED SOLUTIONS LLC
www.ContechES.com
 2201 W. Royal Lane, Suite 200, Irving, TX 75063
 972-590-2039 FAX




THIS PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE
 FOLLOWING U.S. PATENTS: 6,700,000; 6,700,001; 6,700,002;
 RELATED FOREIGN PATENTS, OR OTHER PATENT PENDING.

DATE: 07/15/16	SCALE: 1/2" = 1'-0"
DESIGNED: JHR	DRAWN: KJW
CHECKED: XXX	APPROVED: ----
PROJECT No.: 542946	SEQUENCE No.: 10
SHEET: 1 OF 1	


FOR REFERENCE ONLY. TO BE CONSTRUCTED AS PART OF FILING 1.

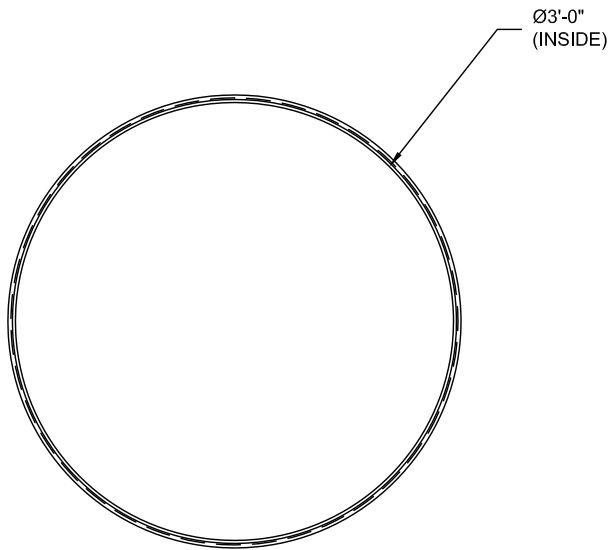


PLAN VIEW

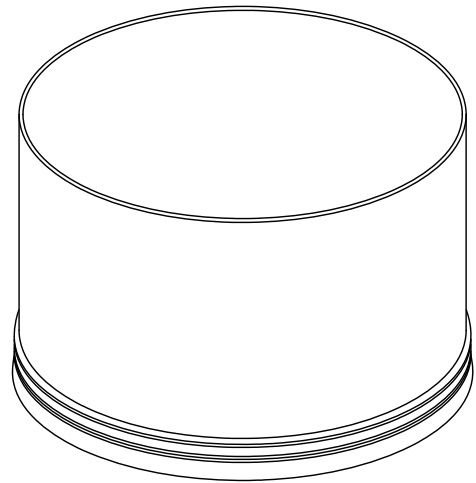

ISOMETRIC VIEW

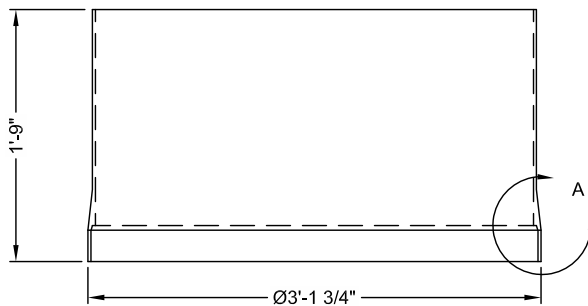

ELEVATION VIEW

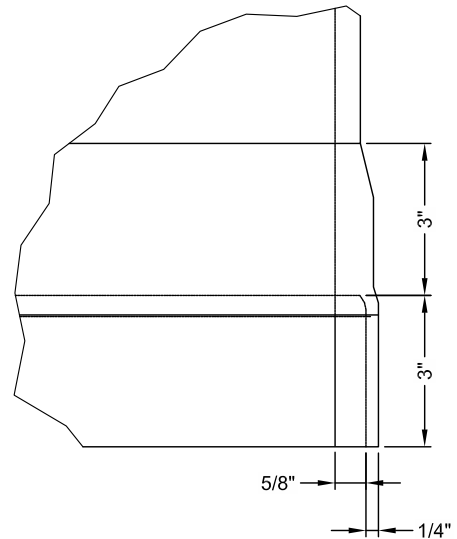

DETAIL A
SCALE 3/16



THIS PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,708,848; 6,641,720; 6,511,995; 6,581,783; RELATED FOREIGN PATENTS, OR OTHER PATENTS PENDING.

CONTECH
FABRICATION
DRAWING

CONTECH
ENGINEERED SOLUTIONS LLC
www.ContechES.com




2201 W. Royal Lane, Suite 260, Irving, TX 75063
972-590-2000 972-590-2039 FAX

CDS3030-6-C - 542946-10, CYLINDER EXTENSION DETAILS
COMPARK SOUTH
PARKER, CO
for SYSTEM: WQ UNIT #1


DATE: 07/15/16	SCALE: 3/4" = 1'-0"	PROJECT No.: 542946	SEQ. No.: 10	DRAWN: KJW	CHECKED: XXX
----------------	---------------------	---------------------	--------------	------------	--------------

I:\MERLIN\PROJECT\ACTIVE\542946\542946-10-CDS\DRAWINGS\PRE-542946-10-CDS3030-6-C CONFAB.DWG 7/15/2016 10:19 AM


**FOR REFERENCE ONLY. TO BE
CONSTRUCTED AS PART OF FILING 1.**

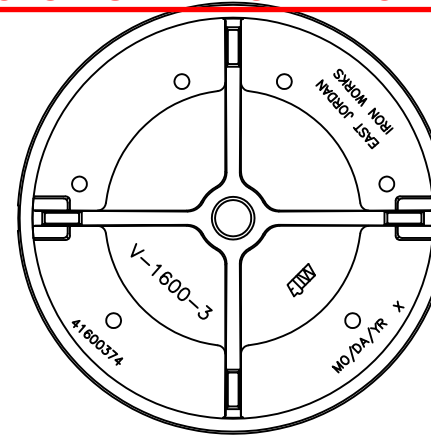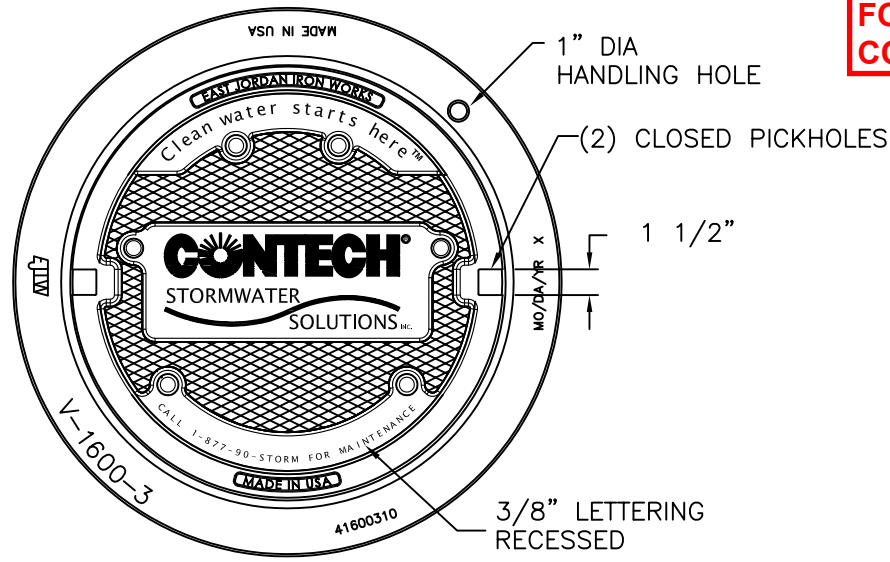

COVER SECTION

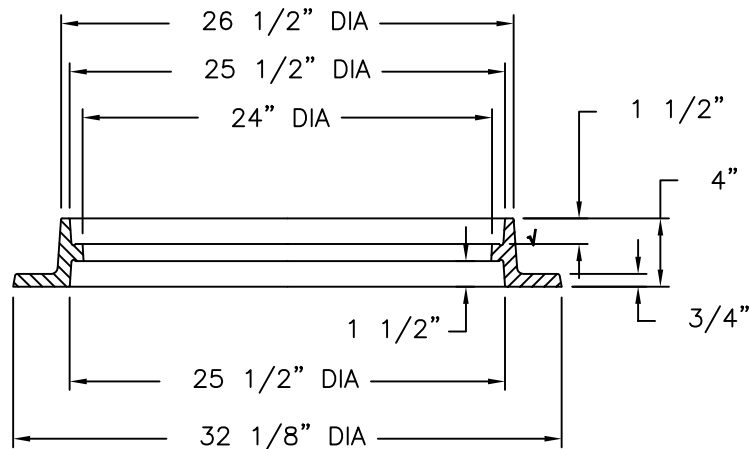

RING SECTION



PICKHOLE DETAIL

EJIW EAST JORDAN
IRON WORKS EST. 1883

800-626-4653
www.ejiw.com
MADE IN USA

PRODUCT NUMBER

41600389

CATALOG NUMBER

V1600-3

**REVERSIBLE RING &
COVER ASSEMBLY**

LOAD RATING

HEAVY DUTY HS-20

COATING

UNDIPPED

ESTIMATED WEIGHT

COVER: 135 LBS

RING: 120 LBS

UNIT: 255 LBS

MATERIAL SPECIFICATION

RING - GRAY IRON
ASTM A48 CL35B

COVER - GRAY IRON
ASTM A48 CL35B

OPEN AREA

N/A

√ DESIGNATES MACHINE SURFACE

DRAWN
DEW

DATE
05/02/08

LAST REVISED


DATE

REFERENCE INFORMATION


41600310

41600374


FOR REFERENCE ONLY. TO BE CONSTRUCTED AS PART OF FILING 1.

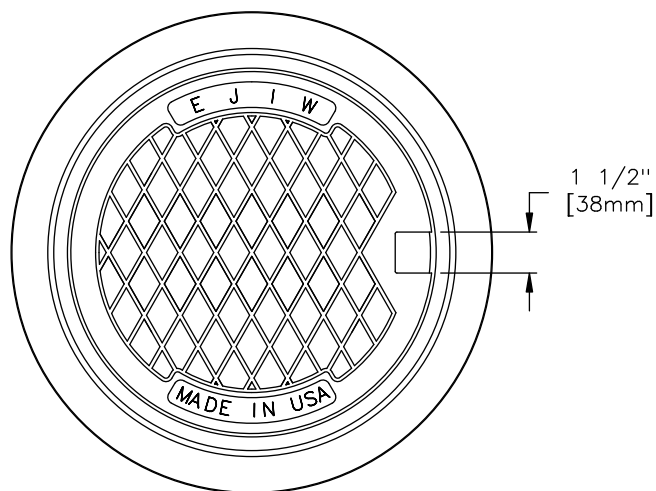


RING BOTTOM FLANGE

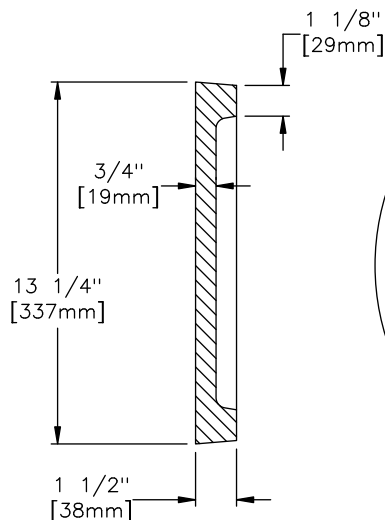


COVER SECTION

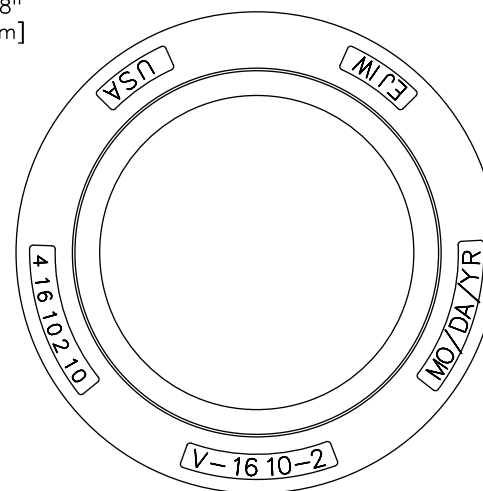


RING TOP FLANGE

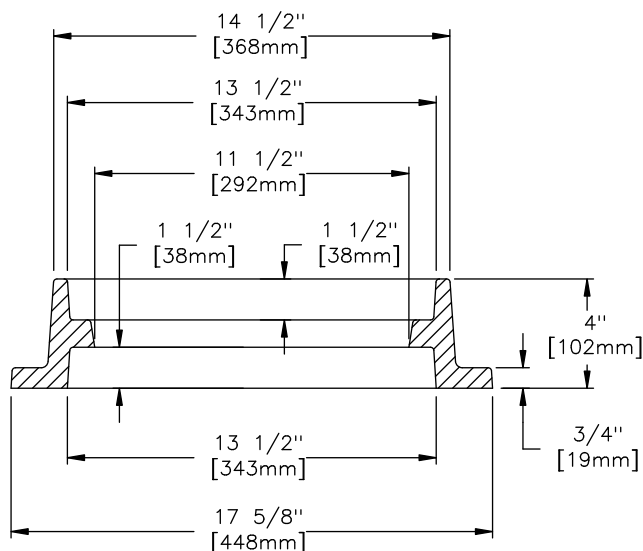

RING SECTION



PICKHOLE DETAIL



COVER BACK

NOTE:
RING IS REVERSIBLE AND CAN BE
INSTALLED AS A TOP FLANGE UNIT

**EAST JORDAN
IRON WORKS, INC.**

P.O. BOX 439
EAST JORDAN, MI. 49727
1-800-874-4100
FAX 231-536-4458

DRAWN
DAL

DATE
06/12/03

APPROVED

DATE

ASSEMBLY

PRODUCT NO.

41610201

CATALOG NO.

V-1610-2

REF. SALES DRAWING

41610210

41610220

EST. WT.

COVER: 36 LBS 16kg

RING: 45 LBS 20kg

TOTAL: 81 LBS 37kg

OPEN AREA

N/A

MAT'L SPEC.

COVER — GRAY IRON
ASTM A48 CL35B

RING — GRAY IRON
ASTM A48 CL35B

LOAD RATING

HEAVY DUTY



**INLINE
HYDRAULIC CALCULATIONS**
COMPARK SOUTH
PARKER, CO
542946-10



DESIGN PARAMETERS

CDS Model No. =	CDS3030
Design Treatment Flow =	<u>3.0</u> cfs
Peak Design Flow =	<u>29.20</u> cfs
Peak Design Return Interval =	<u>100</u> year
Rim Elevation @ US Structure	<u>5843.08</u> ft

DETAILED CALCULATIONS

TREATMENT FLOW

Tailwater Condition at Outfall, EL_0

$$EL_0 = \underline{5,830.16} \text{ ft (invert plus depth of flow at D/S outlet)}$$

Exit Loss from DownStream Pipe, h_1

$$h_1 = k * [V^2 / (2 * g)]$$

where,

$$k = \underline{1.00}$$

$$V = Q / A_F$$

$$= \underline{7.48} \text{ fps}$$

$$h_1 = \underline{0.87} \text{ ft}$$

$$EGL_1 = EL_0 + h_1$$

$$= \underline{5831.03} \text{ ft}$$

Head Loss Through Downstream Pipe, h_2

Friction Losses, h_2

$$h_2 = S_{EGL} * L$$

where,

$$L = \underline{12} \text{ ft}$$

$$S_{EGL} = [(Q * n) / (1.49 * A_F * R^{2/3})]^2$$

where,

Pipe Characteristics

$$\text{Dia.} = \underline{24} \text{ in}$$

$$S_{PIPE} = \underline{0.0310} \text{ ft/ft}$$

$$n = \underline{0.013}$$

Flow Characteristics

$$d_F = \underline{0.37} \text{ ft}$$

$$A_F = \underline{0.40} \text{ sf}$$

$$P_W = \underline{1.78} \text{ ft}$$

$$R = \underline{0.23} \text{ ft}$$

Head Loss Through Downstream Pipe, h_2 (cont.'d)

7/26/2016

$$S_{\text{EGL}} = \underline{0.03112} \text{ ft / ft}$$

$$h_2 = \underline{0.3734} \text{ ft}$$

$$\begin{aligned} \text{EGL}_2' &= \text{EGL}_1 + h_2 \\ &= \underline{5831.40} \text{ ft} \end{aligned}$$

Check Entrance Condition for Critical Depth Control

$$\text{EL}_{\text{CDS Inv.}} = \underline{5830.16} \text{ ft}$$

$$d_c = \underline{0.61} \text{ ft}$$

$$\begin{aligned} \text{EGL}_C &= \text{EL}_{\text{CDS Inv.}} + d_c + V_{dc}^2 / (2 * g) \\ &= \underline{5830.98} \text{ ft} \end{aligned}$$

Identify Controlling EGL

Flow enters pipe at critical depth, EGLc controls.

$$\text{EGL}_2 = \underline{5830.98} \text{ ft}$$

Re-entry Loss into DownStream Pipe, h_3

$$h_3 = k * [V^2 / (2 * g)]$$

where,

$$k = \underline{0.20}$$

$$V = Q / A$$

$$= \underline{3.69} \text{ fps (area based on critical depth)}$$

$$h_3 = \underline{0.04} \text{ ft}$$

$$\begin{aligned} \text{EGL}_3' &= \text{EGL}_2 + h_3 \\ &= \underline{5831.03} \text{ ft} \end{aligned}$$

Oil Baffle Loss, h_4

$$h_4 = k * [V^2 / (2 * g)]$$

where,

$$k = \underline{1.00}$$

$$A_{\text{Baffle}} = \underline{6.49} \text{ sf}$$

$$V = Q / A_{\text{baffle}}$$

$$= \underline{0.46} \text{ fps}$$

$$h_4 = \underline{0.0033} \text{ ft}$$

$$\begin{aligned} \text{EGL}_4 &= \text{EGL}_3 + h_4 \\ &= \underline{5831.03} \text{ ft} \end{aligned}$$

Check Standard Weir Elevation

$$\text{HL}_{\text{CDS}} = \underline{0.67} \text{ ft}$$

$$\begin{aligned} \text{EL}_W' &= \text{EGL}_4 + \text{HL}_{\text{CDS}} \\ &= \underline{5831.70} \text{ ft} \end{aligned}$$

$$H_W' = \text{EL}_W' - \text{EL}_{\text{CDS Inv.}}$$

$$= \underline{1.54} \text{ ft, or } \underline{18.46} \text{ in}$$

$$\text{Std. Weir Height} = \underline{21} \text{ in}$$

Status **OK**

$$\text{Use } H_W = \underline{21} \text{ in, or } \underline{1.75} \text{ ft}$$

$$\begin{aligned} \text{EL}_W &= \text{EL}_{\text{CDS Inv.}} + H_W \\ &= \underline{5831.91} \text{ ft} \end{aligned}$$

Tailwater Condition at Outfall, EL_0

$$EL_0 = \underline{5,830.90} \text{ ft (tailwater condition per engineer, 100-yr)}$$

Exit Loss from DownStream Pipe, h_1

$$h_1 = k * [V^2 / (2*g)]$$

where,

$$k = \underline{1.00}$$

$$V = Q / A_F$$

$$= \underline{13.89} \text{ fps}$$

$$h_1 = \underline{2.99} \text{ ft}$$

$$EGL_1 = EL_0 + h_1$$

$$= \underline{5833.89} \text{ ft}$$

Head Loss Through Downstream Pipe, h_2 Friction Losses, h_2

$$h_2 = S_{EGL} * L$$

where,

$$L = \underline{12} \text{ ft}$$

$$S_{EGL} = [(Q * n) / (1.49 * A_F * R^{2/3})]^2$$

where,

Pipe Characteristics

$$\text{Dia.} = \underline{24} \text{ in}$$

$$S_{PIPE} = \underline{0.0310} \text{ ft/ft}$$

$$n = \underline{0.013}$$

Flow Characteristics

$$d_n = \underline{1.27} \text{ ft}$$

$$A_F = \underline{2.10} \text{ sf}$$

$$P_W = \underline{3.69} \text{ ft}$$

$$R = \underline{0.57} \text{ ft}$$

$$S_{EGL} = \underline{0.0310} \text{ ft / ft}$$

$$h_2 = \underline{0.37} \text{ ft}$$

$$EGL_2' = EGL_1 + h_2$$

$$= \underline{5834.27} \text{ ft}$$

Check Entrance Condition for Critical Depth Control

$$EL_{CDS \text{ Inv.}} = \underline{5830.16} \text{ ft}$$

$$d_c = \underline{1.91} \text{ ft}$$

$$EGL_C = EL_{CDS \text{ Inv.}} + d_c + V_{dc}^2 / (2*g)$$

$$= \underline{5833.46} \text{ ft}$$

Identify Controlling EGL

Flow enters pipe at critical depth, EGLc controls.

$$EGL_2 = \underline{5833.46} \text{ ft}$$

Re-entry Loss into DownStream Pipe, h_3

7/26/2016

$$h_3 = k * [V^2 / (2*g)]$$

where,

$$k = \frac{0.20}{}$$

$$V = Q / A_F$$

$$= \frac{9.46}{} \text{ fps (area based on critical depth)}$$

$$h_3 = \frac{0.28}{} \text{ ft}$$

$$EGL_3 = EGL_2 + h_3$$

$$= \frac{5833.73}{} \text{ ft}$$

Oil Baffle Loss, h_4

$$h_4 = k * [V^2 / (2*g)]$$

where,

$$k = \frac{0.00}{} \text{ (Skirted-baffle model)}$$

$$A_{\text{Baffle}} = \frac{6.49}{} \text{ sf}$$

$$V = Q / A_{\text{Baffle}}$$

$$= \frac{4.50}{} \text{ fps}$$

$$h_4 = \frac{0.00}{} \text{ ft}$$

$$EGL_4 = EGL_3 + h_4$$

$$= \frac{5833.73}{} \text{ ft}$$

$$HGL_4 = EGL_4 - [V_P^2 / (2*g)]$$

$$= \frac{5832.35}{} \text{ ft}$$

Head over Diversion Weir, h_5 Elevation of Weir

$$EL_{\text{Weir}} = \frac{5831.91}{} \text{ ft (established above)}$$

Headloss for Free Discharge Condition

$$h_{5a} = [Q / (C * L)]^{2/3}$$

where,

$$C = \frac{3.1}{}$$

$$L = \frac{3.00}{} \text{ ft}$$

$$h_{5a} = \frac{2.14}{} \text{ ft}$$

$$EGL_{5a} = EL_{\text{Weir}} + h_{5a}$$

$$= \frac{5834.05}{} \text{ ft}$$

Headloss for Submerged Condition

$$d_{\text{Sub}} = \frac{0.44}{} \text{ ft (depth of submergence)}$$

$$h_{5b} = \frac{1.76}{} \text{ ft (separate submerged weir calc.)}$$

$$EGL_{5b} = EGL_4 + h_{5b}$$

$$= \frac{5835.50}{} \text{ ft}$$

Identify EGL U/S of WeirThe discharge condition is Submerged, therefore

$$EGL_5 = \frac{5835.50}{} \text{ ft}$$

Expansion Loss from U/S Pipe, h_6

7/26/2016

$$h_6 = k * [V^2 / (2 * g)]$$

where,

$$k = \underline{0.30}$$

$$V = Q / A_F$$

$$= \underline{9.30} \text{ fps}$$

$$h_6 = \underline{0.40} \text{ ft}$$

$$EGL_6 = EGL_5 + h_6$$

$$= \underline{5835.90} \text{ ft}$$

Head Loss Through Upstream Pipe, h_7 Friction Losses, h_7

$$h_7 = S_{EGL} * L$$

where,

$$L = \underline{18} \text{ ft}$$

$$S_{EGL} = [(Q * n) / (1.49 * A_F * R^{2/3})]^2$$

where,

Pipe Characteristics

$$\text{Dia.} = \underline{24} \text{ in}$$

$$S_{PIPE} = \underline{0.0310} \text{ ft/ft}$$

$$n = \underline{0.013}$$

Flow Characteristics

$$d_n = \underline{2.00} \text{ ft}$$

$$A_F = \underline{3.14} \text{ sf}$$

$$P_W = \underline{6.28} \text{ ft}$$

$$R = \underline{0.50} \text{ ft}$$

$$S_{EGL} = \underline{0.0166} \text{ ft / ft}$$

$$h_7 = \underline{0.30} \text{ ft}$$

$$EGL_7' = EGL_6 + h_7$$

$$= \underline{5836.20} \text{ ft}$$

Check Entrance Condition for Critical Depth Control

$$EL_{U/S \text{ Inv.}} = \underline{5830.72} \text{ ft}$$

$$d_c = \underline{1.91} \text{ ft}$$

$$EGL_C = EL_{CDS \text{ Inv.}} + d_c + V_{dc}^2 / (2 * g)$$

$$= \underline{5834.01} \text{ ft}$$

Identify Controlling EGL

Friction based EGL controls.

$$EGL_7 = \underline{5836.20} \text{ ft}$$

$$HGL_7 = EGL_7 - [V^2 / (2 * g)]$$

$$= \underline{5834.85} \text{ ft}$$



$$\text{Freeboard} = \underline{8.23} \text{ ft (at first upstream structure)}$$

APPENDIX D


Drainage Basin Map

Plotted: 7/30/2020 4:05 PM Dwg Name: P:\C\Projects\CompSouth\2-Filing - No GAT\CompSouth\Ultimate\StormWater\Reports\Drainage\Exhibits\Drainage Basin Map 7-21-20.dwg Updated by: ADrucker

WATCH LINE SEE SHEET 2

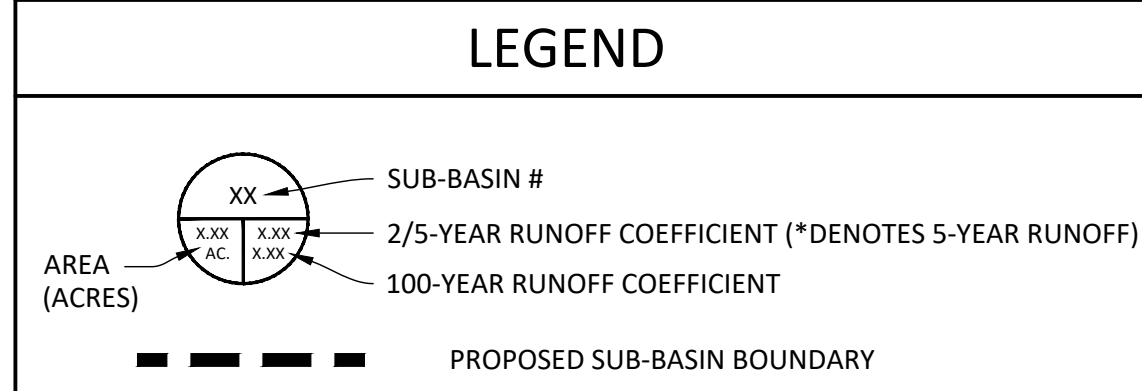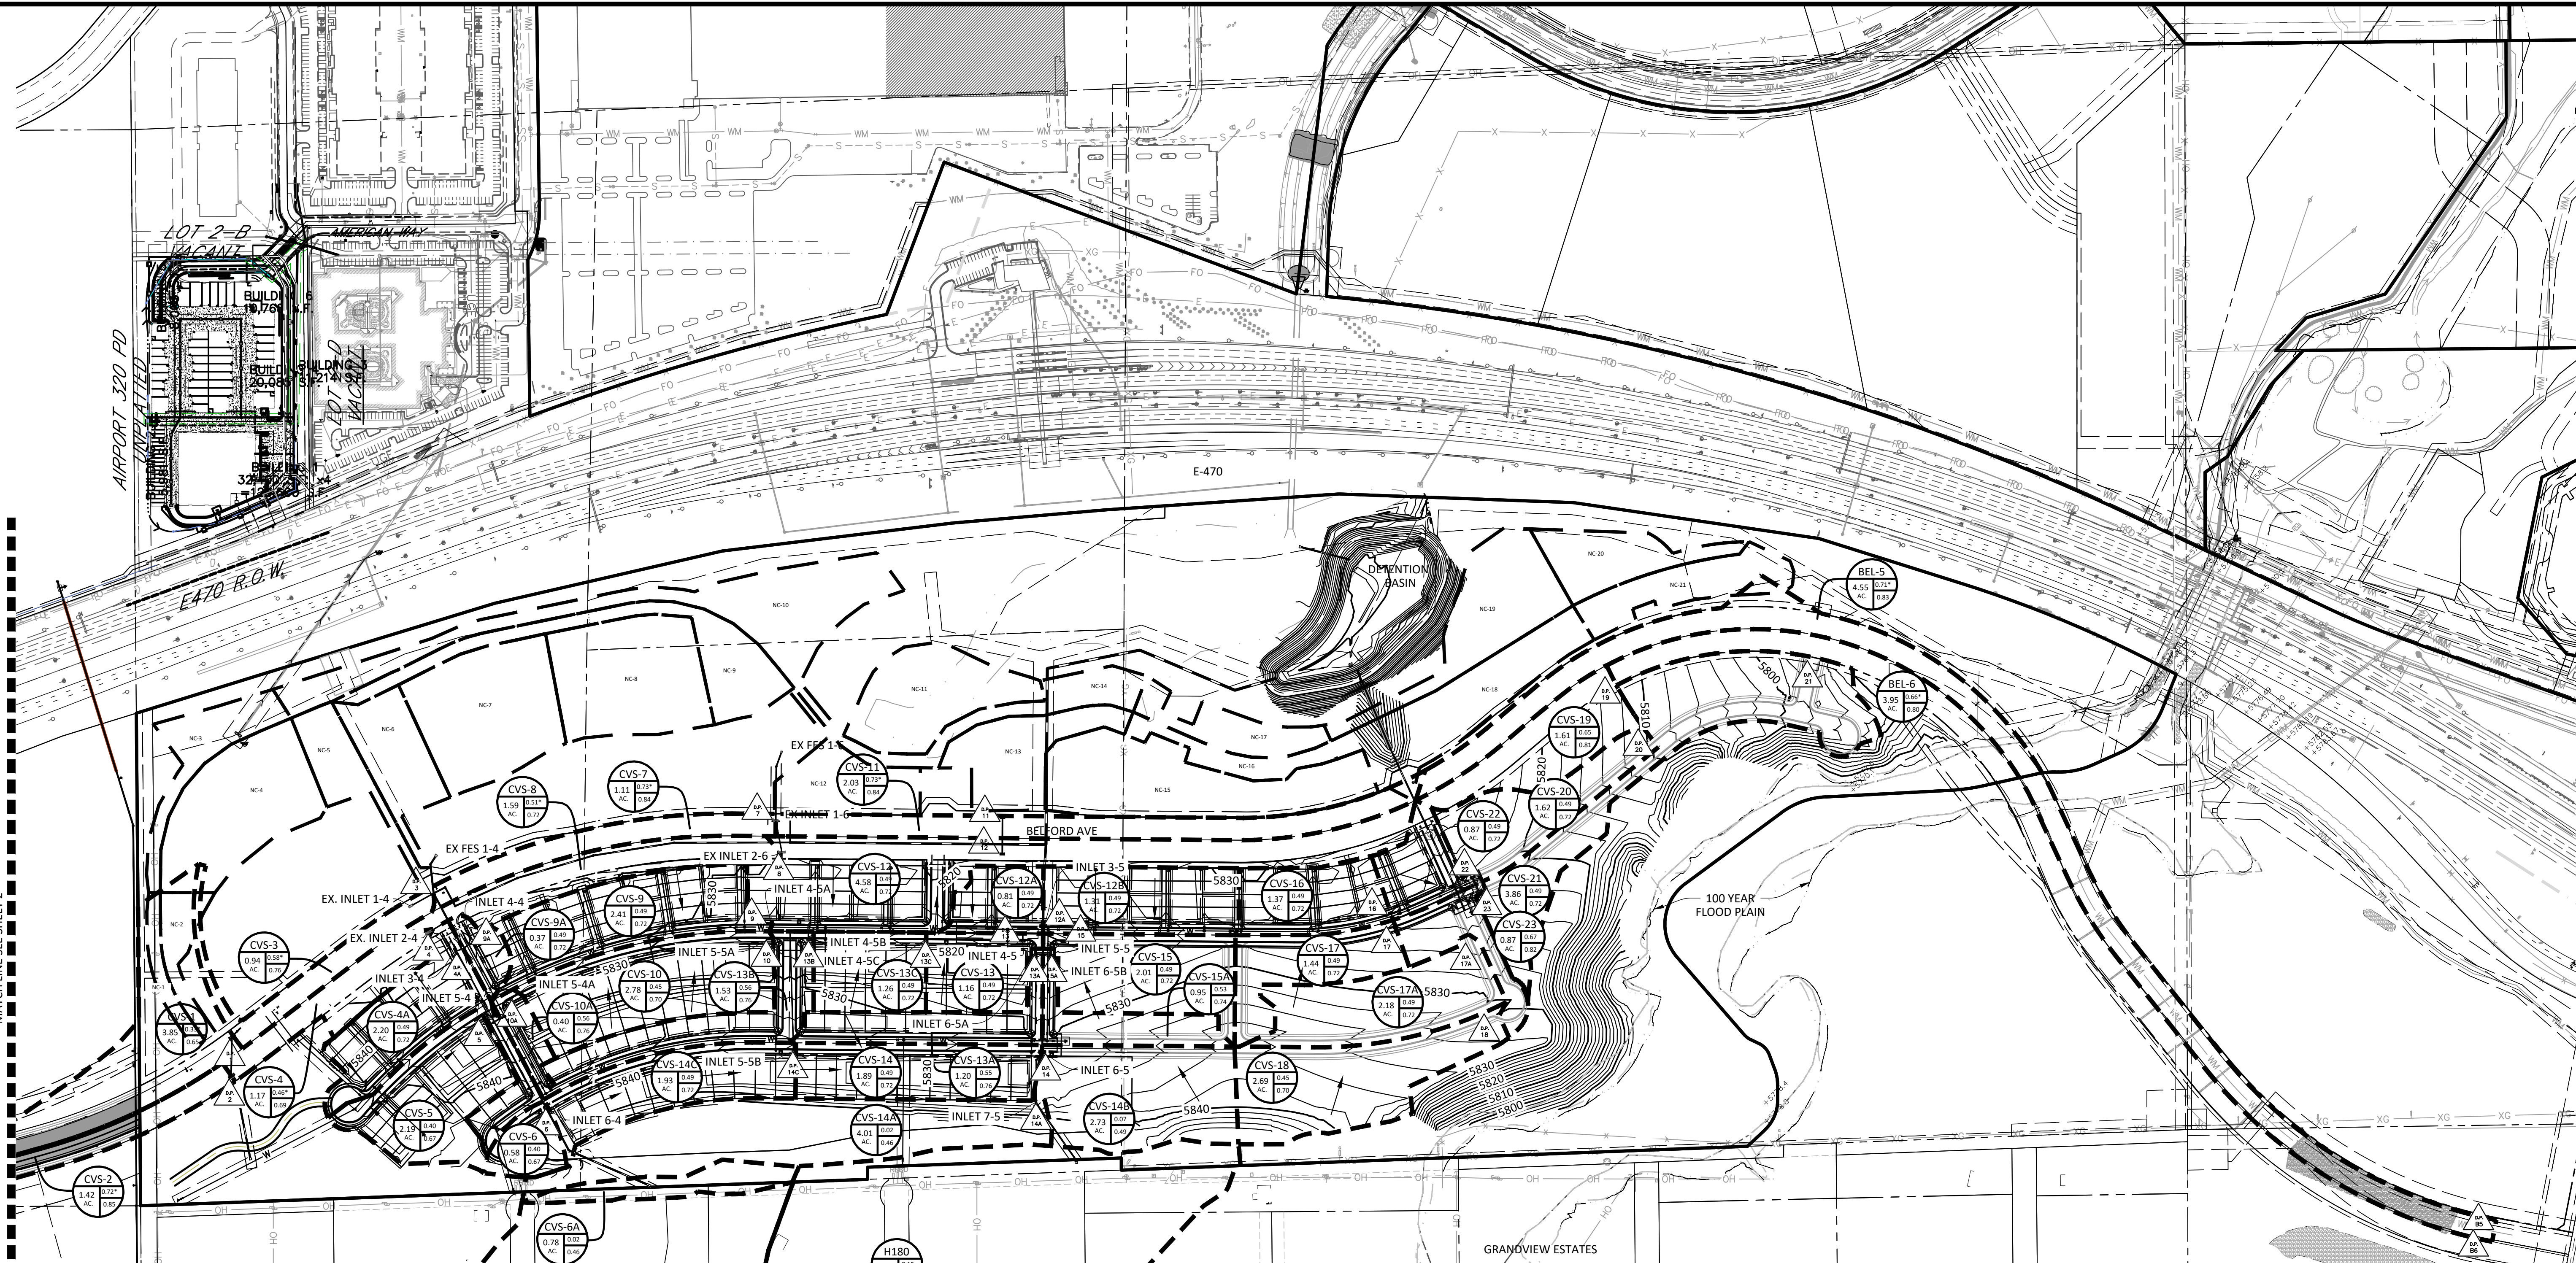


2 YEAR STORM									
DIRECT RUNOFF									
Basin ID	Design Point	Area (ac)	Ts (min)	Runoff Coefficient	Runoff (cfs)	Runoff (cfs)	Runoff (cfs)	Runoff (cfs)	Runoff (cfs)
Basin ID	Design Point	Area (ac)	Ts (min)	Runoff Coefficient	Runoff (cfs)	Runoff (cfs)	Runoff (cfs)	Runoff (cfs)	Runoff (cfs)
CVS-1 (inlet 1-3)	1	3.85	6.9	0.65	4.3	1.10	4.7	4.7	4.7
CVS-2 (inlet 2-3)	2	1.42	6.6	0.65	4.3	0.97	4.2	4.2	4.2
CVS-3 (inlet 1-4)	3	0.84	6.2	0.55	4.4	0.52	2.3	2.3	2.3
CVS-4 (inlet 2-4)	4	7.17	4.1	0.44	5.0	0.26	2.5	2.5	2.5
CVS-5 (inlet 3-4)	5	2.19	8.0	0.40	3.9	0.88	3.4	3.4	3.4
CVS-6 (inlet 4-4)	6	0.58	5.0	0.40	4.7	0.23	1.1	1.1	1.1
CVS-7 (inlet 5-4)	7	1.11	10.2	0.69	3.7	0.77	2.9	2.9	2.9
CVS-8 (inlet 6-4)	8	1.59	10.1	0.49	3.7	0.78	2.9	2.9	2.9
CVS-9 (inlet 1-5)	9	2.41	11.9	0.49	3.5	1.18	4.1	4.1	4.1
CVS-10 (inlet 2-5)	10	2.78	13.7	0.45	3.3	1.28	4.2	4.2	4.2
CVS-11 (inlet 3-5)	11	2.03	12.3	0.69	3.4	1.41	4.9	4.9	4.9
CVS-12 (inlet 4-5)	12	4.58	11.9	0.49	3.5	2.24	7.9	7.9	7.9
CVS-13 (inlet 5-5)	13	1.16	7.4	0.49	4.2	0.57	2.4	2.4	2.4
CVS-14 (inlet 6-5)	14	1.89	11.1	0.49	3.6	0.83	3.3	3.3	3.3
CVS-15 (inlet 1-6)	15	2.05	10.8	0.49	3.3	1.10	3.3	3.3	3.3
CVS-16 (inlet 2-6)	16	1.37	10.0	0.49	3.8	0.87	2.6	2.6	2.6
CVS-17 (inlet 3-6)	17	1.44	8.4	0.49	4.0	0.70	1.9	1.9	1.9
CVS-18 (inlet 4-6)	18	2.01	11.1	0.49	3.6	0.83	3.3	3.3	3.3
CVS-19 (inlet 5-6)	19	1.61	10.1	0.49	3.5	1.05	4.7	4.7	4.7
CVS-20 (inlet 6-6)	20	1.80	10.4	0.51	3.7	0.92	3.6	3.6	3.6
CVS-21 (inlet 1-7)	21	3.88	16.1	0.51	3.1	1.98	6.1	6.1	6.1
CVS-22 (inlet 2-7)	22	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-23 (inlet 3-7)	23	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-24 (inlet 4-7)	24	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-25 (inlet 5-7)	25	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-26 (inlet 6-7)	26	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-27 (inlet 7-7)	27	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-28 (inlet 1-8)	28	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-29 (inlet 2-8)	29	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-30 (inlet 3-8)	30	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-31 (inlet 4-8)	31	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-32 (inlet 5-8)	32	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-33 (inlet 6-8)	33	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-34 (inlet 7-8)	34	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-35 (inlet 8-8)	35	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-36 (inlet 9-8)	36	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-37 (inlet 10-8)	37	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-38 (inlet 11-8)	38	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-39 (inlet 12-8)	39	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-40 (inlet 13-8)	40	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-41 (inlet 14-8)	41	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-42 (inlet 15-8)	42	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-43 (inlet 16-8)	43	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-44 (inlet 17-8)	44	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-45 (inlet 18-8)	45	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-46 (inlet 19-8)	46	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-47 (inlet 20-8)	47	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-48 (inlet 21-8)	48	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-49 (inlet 22-8)	49	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-50 (inlet 23-8)	50	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-51 (inlet 24-8)	51	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-52 (inlet 25-8)	52	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-53 (inlet 26-8)	53	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-54 (inlet 27-8)	54	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-55 (inlet 28-8)	55	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-56 (inlet 29-8)	56	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-57 (inlet 30-8)	57	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-58 (inlet 31-8)	58	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-59 (inlet 32-8)	59	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-60 (inlet 33-8)	60	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-61 (inlet 34-8)	61	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-62 (inlet 35-8)	62	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-63 (inlet 36-8)	63	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-64 (inlet 37-8)	64	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-65 (inlet 38-8)	65	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-66 (inlet 39-8)	66	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-67 (inlet 40-8)	67	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-68 (inlet 41-8)	68	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-69 (inlet 42-8)	69	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-70 (inlet 43-8)	70	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-71 (inlet 44-8)	71	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-72 (inlet 45-8)	72	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-73 (inlet 46-8)	73	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-74 (inlet 47-8)	74	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-75 (inlet 48-8)	75	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-76 (inlet 49-8)	76	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-77 (inlet 50-8)	77	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-78 (inlet 51-8)	78	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-79 (inlet 52-8)	79	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-80 (inlet 53-8)	80	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-81 (inlet 54-8)	81	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-82 (inlet 55-8)	82	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-83 (inlet 56-8)	83	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-84 (inlet 57-8)	84	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-85 (inlet 58-8)	85	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-86 (inlet 59-8)	86	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-87 (inlet 60-8)	87	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-88 (inlet 61-8)	88	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-89 (inlet 62-8)	89	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-90 (inlet 63-8)	90	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-91 (inlet 64-8)	91	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-92 (inlet 65-8)	92	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-93 (inlet 66-8)	93	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-94 (inlet 67-8)	94	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-95 (inlet 68-8)	95	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-96 (inlet 69-8)	96	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-97 (inlet 70-8)	97	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-98 (inlet 71-8)	98	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-99 (inlet 72-8)	99	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-100 (inlet 73-8)	100	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-101 (inlet 74-8)	101	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-102 (inlet 75-8)	102	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-103 (inlet 76-8)	103	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-104 (inlet 77-8)	104	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-105 (inlet 78-8)	105	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-106 (inlet 79-8)	106	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-107 (inlet 80-8)	107	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-108 (inlet 81-8)	108	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-109 (inlet 82-8)	109	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-110 (inlet 83-8)	110	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-111 (inlet 84-8)	111	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-112 (inlet 85-8)	112	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-113 (inlet 86-8)	113	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-114 (inlet 87-8)	114	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-115 (inlet 88-8)	115	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-116 (inlet 89-8)	116	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-117 (inlet 90-8)	117	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-118 (inlet 91-8)	118	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-119 (inlet 92-8)	119	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0
CVS-120 (inlet 93-8)	120	0.87	6.2	0.51	4.4	0.45	2.0	2.0	2.0

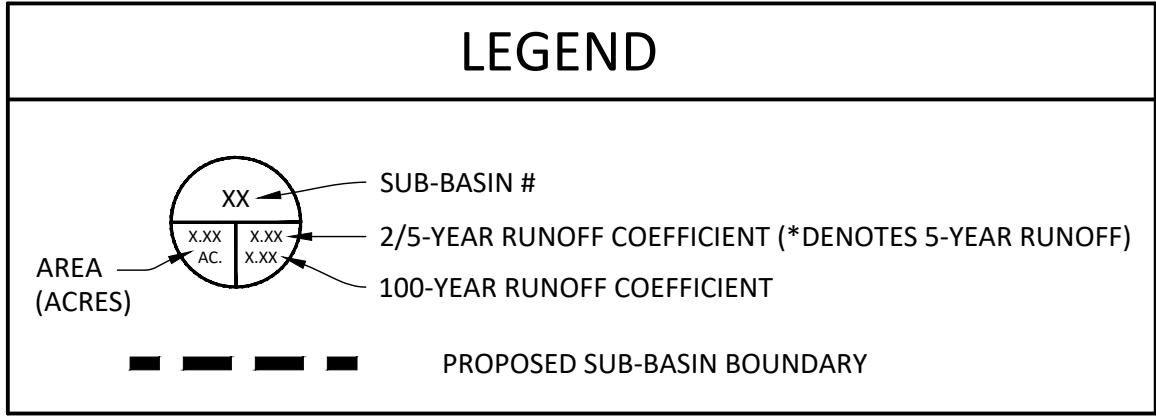

2 YEAR STORM									
Basin ID	Design Point	DIRECT RUNOFF		To Inlet	Runoff Coefficient, C	Intensity, (in/hr)	CVA (Acres)	Direct Runoff, Q (cfs)	Remarks
		Area (ac)	Time (min)						
CVS-1 (inlet 1-3)	1	3.85	6.9	0.33	4.3	1.10	4.7	4.7	0.0 8.9 3.1%
CVS-2 (inlet 2-3)	2	1.42	6.6	0.69	4.3	0.97	4.2	4.2	0.0 4.2 10.0%
CVS-3 (inlet 1-4)	3	0.94	6.2	0.55	4.4	0.52	2.3	2.3	0.0 2.3 1.7%
CVS-4 (inlet 2-4)	4	1.17	4.1	0.44	5.0	0.51	2.6	2.6	0.0 2.5 0.9%
CVS-4A (inlet 3-4)	4A	2.20	11.3	0.49	3.6	1.08	3.9	3.9	0.0 3.9 1.0%
CVS-5 (inlet 5-4)	5	2.19	9.0	0.40	3.9	0.68	3.4	3.4	0.0 3.4 1.0%
CVS-6 (inlet 6-4)	6	0.58	5.0	0.40	4.7	0.23	1.1	1.1	0.0 0.6 1.7%
CVS-6A (FES 2-4)	6A	0.78	5.0	0.02	4.7	0.01	0.1	0.1	0.0 0.5 3.1%
CVS-7 (inlet 1-6)	7	1.11	10.2	0.69	3.7	0.77	2.9	2.9	0.0 2.9 3.0%
CVS-8 (inlet 4-5A)	8	1.59	10.1	0.49	3.7	0.78	2.9	2.9	0.0 2.9 1.4%
CVS-9 (inlet 4-5A)	9	2.41	11.9	0.49	3.5	1.16	4.1	4.1	0.0 4.1 1.2%
CVS-9A (inlet 4-4)	9A	0.37	5.0	0.49	4.7	0.18	0.9	0.9	0.0 0.9 1.0%
CVS-10 (inlet 5-5A)	10	2.78	13.7	0.45	3.3	1.26	4.2	4.2	0.0 4.2 1.2%
CVS-10A (inlet 5-4A)	10A	0.40	5.8	0.56	4.3	0.22	1.0	1.0	0.0 1.0 1.0%
CVS-11 (inlet 1-5)	11	2.03	12.3	0.69	3.4	1.41	4.9	4.9	0.0 4.9 0.8%
CVS-12 (inlet 2-5)	12	4.58	11.9	0.49	3.5	2.24	7.9	7.9	0.0 7.9 0.7%
CVS-12A (inlet 3-5)	12A	0.81	7.7	0.49	4.3	0.40	1.8	1.8	0.0 1.8 1.0%
CVS-12B (inlet 3-5)	12B	1.31	10.8	0.49	3.6	0.64	2.3	2.3	0.0 2.3 0.9%
CVS-13 (inlet 4-5)	13	1.16	7.4	0.49	4.2	0.57	2.4	2.4	0.0 2.4 3.0%
CVS-13A (inlet 5-5A)	13A	1.20	8.7	0.55	4.0	0.66	2.8	2.8	0.0 2.8 1.0%
CVS-13B (inlet 4-5B)	13B	1.53	9.0	0.56	3.9	0.66	3.4	3.4	0.0 3.4 1.0%
CVS-13C (inlet 4-5C)	13C	1.26	8.8	0.49	3.9	0.62	2.4	2.4	0.0 2.4 1.0%
CVS-14 (inlet 6-5)	14	1.89	11.1	0.49	3.6	0.93	3.3	3.3	0.0 3.3 0.2%
CVS-14A (inlet 7-5)	14A	4.01	17.5	0.02	2.9	0.07	0.2	0.2	0.0 0.2 4.7%
CVS-14B (inlet 6-5)	14B	2.73	13.4	0.07	3.3	0.19	0.6	0.6	0.0 0.6 3.4%
CVS-14C (inlet 5-5B)	14C	1.93	11.4	0.49	3.6	0.94	3.4	3.4	0.0 3.4 2.8%
CVS-15 (inlet 5-5)	15	2.05	13.4	0.49	3.3	1.00	3.3	3.3	0.0 3.3 5.0%
CVS-15A (inlet 6-5B)	15A	0.95	7.9	0.53	4.1	0.50	2.0	2.0	0.0 2.0 1.0%
CVS-16 (inlet 2-11A)	16	1.37	10.0	0.49	3.8	0.67	2.5	2.5	0.0 2.5 5.2%
CVS-17 (inlet 2-11)	17	1.44	8.4	0.49	4.0	0.70	1.9	1.9	0.0 1.9 5.2%
CVS-17A	17A	2.18	13.6	0.49	3.3	1.07	3.5	3.5	- - - -
CVS-18	18	2.69	10.0	0.45	3.8	1.20	4.5	4.5	- - - -
CVS-19	19	1.61	6.0	0.65	4.5	1.05	4.7	4.7	- - - -
CVS-20	20	1.80	10.4	0.49	3.7	0.68	3.3	3.3	- - - -
CVS-21	21	3.88	16.1	0.49	3.1	1.90	5.8	5.8	- - - -
CVS-22 (inlet 2-10A)	22	0.87	6.2	0.49	4.4	0.43	1.9	1.9	0.0 1.9 1.0%
CVS-23 (inlet 2-10)	23	0.67	5.5	0.67	4.5	0.56	2.7	2.7	0.0 2.7 1.0%
BEL-1 (inlet 2-1)	B1	3.73	12.8	0.30	3.4	1.13	3.8	3.8	0.0 3.9 3.9%
BEL-2 (inlet 1-1)	B2	1.38	7.8	0.69	4.2	0.95	2.8	2.8	0.0 2.8 0.9%
BEL-3 (inlet 2-2)	B3	6.76	14.4	0.19	3.2	1.26	4.1	4.1	0.0 4.1 6.6%
BEL-4 (inlet 1-2)	B4	1.75	7.9	0.69	4.1	1.21	8.0	8.0	0.0 11.6 2.9%
BEL-5	B5	4.55	11.0	0.68	3.6	1.05	11.1	11.1	- - - -
BEL-6	B6	3.95	7.4	0.63	4.2	2.50	10.5	10.5	- - - -

5 YEAR STORM									
Basin ID	Design Point	DIRECT RUNOFF		To Inlet	Runoff Coefficient, C	Intensity, (in/hr)	CVA (Acres)	Direct Runoff, Q (cfs)	Remarks
		Area (ac)	Time (min)						
CVS-1 (inlet 1-3)	1	3.85	6.9	0.33	4.3	1.27	5.5	5.5	0.0 10.0 3.1%
CVS-2 (inlet 2-3)	2	1.42	6.6	0.72	4.3	1.03	4.5	4.5	0.0 4.5 10.0%
CVS-3 (inlet 1-4)	3	0.94	6.2	0.58	4.4	0.54	2.4	2.4	0.0 2.4 1.7%
CVS-4 (inlet 2-4)	4	1.17	4.1	0.46	5.0	0.53	2.8	2.8	0.0 2.6 0.9%
CVS-4A (inlet 3-4)	4A	2.20	11.3	0.51	3.6	1.13	4.0	4.0	0.0 4.0 1.0%
CVS-5 (inlet 5-4)	5	2.19	9.0	0.42	3.9	0.92	3.6	3.6	0.0 3.6 1.0%
CVS-6 (inlet 6-4)	6	0.58	5.0	0.42	4.7	0.24	1.1	1.1	0.0 0.6 1.7%
CVS-6A (FES 2-4)	6A	0.78	5.0	0.02	4.7	0.01	0.1	0.1	0.0 0.5 3.1%
CVS-7 (inlet 1-6)	7	1.11	10.2	0.73	3.7	0.81	3.0	3.0	0.0 3.0 3.0%
CVS-8 (inlet 4-5A)	8	1.59	10.1	0.51	3.7	0.81	3.0	3.0	0.0 3.0 1.4%
CVS-9 (inlet 4-5A)	9	2.41	11.9	0.51	3.5	1.23	4.3	4.3	0.0 4.3 1.2%
CVS-9A (inlet 4-4)	9A	0.37	5.0	0.51	4.7	0.19	0.9	0.9	0.0 0.9 1.0%
CVS-10 (inlet 5-5A)	10	2.78	13.7	0.47	3.3	1.32	4.3	4.3	0.0 4.3 1.2%
CVS-10A (inlet 5-4A)	10A	0.40	5.8	0.59	4.5	0.23	1.1	1.1	0.0 1.1 1.0%
CVS-11 (inlet 1-5)	11	2.03	12.3	0.73	3.4	1.47	5.1	5.1	0.0 5.1 1.3%
CVS-12 (inlet 2-5)	12	4.58	11.9	0.51	3.5	2.34	8.2	8.2	0.0 8.2 0.7%
CVS-12A (inlet 3-5)	12A	0.81	7.7	0.51	4.1	0.41	1.7	1.7	0.0 1.7 0.9%
CVS-12B (inlet 3-5)	12B	1.31	10.8	0.51	3.6	0.67	2.4	2.4	0.0 2.4 1.9%
CVS-13 (inlet 4-5)	13	1.16	7.4	0.51	4.2	0.59	2.5	2.5	0.0 2.5 3.0%
CVS-13A (inlet 5-5A)	13A	1.20	8.7	0.56	4.0	0.69	2.7	2.7	0.0 2.7 1.0%
CVS-13B (inlet 4-5B)	13B	1.53	9.0	0.59	3.9	0.90	3.5	3.5	0.0 3.5 1.0%
CVS-13C (inlet 4-5C)	13C	1.26	8.8	0.51	3.9	0.64	2.5	2.5	0.0 2.5 1.0%
CVS-14 (inlet 6-5)	14	1.89	11.1	0.51	3.6	0.97	3.5	3.5	0.0 3.5 3.2%
CVS-14A (inlet 7-5)	14A	4.01	17.5	0.02	2.9	0.07	0.2	0.2	0.0 0.2 4.7%
CVS-14B (inlet 6-5)	14B	2.73	13.4	0.07	3.3	0.20	0.7	0.7	0.0 0.7 3.4%
CVS-14C (inlet 5-5B)	14C	1.93	11.4	0.51	3.6	0.99	3.5	3.5	0.0 3.5 2.8%
CVS-15 (inlet 5-5)	15	2.01	13.4	0.51	3.3	1.03	3.4	3.4	0.0 3.4 5.0%
CVS-15A (inlet 6-5B)	15A	0.95	7.9	0.55	4.1	0.52	2.1	2.1	0.0 2.1 1.0%
CVS-16 (inlet 2-11A)	16	1.37	10.0	0.51	3.8	0.70	2.6	2.6	0.0 2.6 5.2%
CVS-17 (inlet 2-11)	17	1.44	8.4	0.51	4.0	0.74	3.0	3.0	0.0 3.0 5.2%
CVS-18	18	2.69	10.0	0.47	3.8	1.25	4.7	4.7	- - - -
CVS-19	19	1.61	6.0	0.68	4.5	1.09	4.9	4.9	- - - -
CVS-20	20	1.80	10.4	0.51	3.7	0.92	3.4	3.4	- - - -
CVS-21	21	3.88	16.1	0.51	3.1	1.98	6.1	6.1	- - - -
CVS-22 (inlet 2-10A)	22	0.87	6.2	0.51	4.4	0.45	2.0	2.0	0.0 2.0 1.0%
CVS-23 (inlet 2-10)	23	0.67	5.5	0.70	4.6	0.61	2.8	2.8	0.0 2.8 1.0%
BEL-1 (inlet 2-1)	B1	3.73	12.8	0.32	3.4	1.18	4.0	4.0	0.0 4.1 3.9%
BEL-2 (inlet 1-1)	B2	1.38	7.8	0.72	4.2	0.99	4.1	4.1	0.0 4.1 0.9%
BEL-3 (inlet 2-2)	B3	6.76	14.4	0.20	3.2	1.32	4.2	4.2	0.0 4.2 6.9%
BEL-4 (inlet 1-2)	B4	1.75	7.9	0.73	4.1	1.27	8.2	8.2	0.0 12.1 2.9%
BEL-5	B5	4.55	11.0	0.71	3.6	1.22	11.6	11.6	- - - -
BEL-6	B6	3.95	7.4	0.66	4.2	2.61	10.9	10.9	- - - -

100 YEAR STORM										TOTAL RUNOFF										BLET				STORM SEWER				REMARKS				
Basin ID	Design Point	Area (Ac)	Type	DIRECT RUNOFF			CVA (Ac)	Direct Runoff @ Q (cfs)	Type	CVA (Ac)	Total Runoff @ Q (cfs)	Runoff Coefficient	Intensity (in/hr)	Time (min)	Design Point	Type	CVA (Ac)	Runoff @ Q (cfs)	Runoff Coefficient	Time (min)	Type	CVA (Ac)	Runoff @ Q (cfs)	Runoff Coefficient	Time (min)	Type	CVA (Ac)	Runoff @ Q (cfs)	Runoff Coefficient	Time (min)	Remarks	
				Area (Ac)	Time (min)	Runoff @ Q (cfs)																										
CVS-1 (inlet 1-3)	1	3.85	6.9	0.80	6.0	2.91	26.2	12.1	25.1	69.2	13.5	6.7	22.5	3.1%	24	Runoff from CVS-1																
CVS-2 (inlet 2-3)	2	1.42	6.6	0.85	6.1	1.21	8.9	12.1	6.9	10.0	10.0	1.0	10.0	0.0%	24	Runoff from CVS-2																
CVS-3 (inlet 1-4)	3	0.94	6.2	0.76	6.3	0.71	5.9	12.1	0.71	12.6	7.7	4.9	7.7	1.7%	17	Runoff from CVS-3																
CVS-4 (inlet 2-4)	4	1.17	4.1	0.69	6.3	0.81	7.6	12.1	0.81	8.6	8.0	0.5	8.0	0.9%	18	Runoff from CVS-4																
CVS-4A (inlet 3-4)	4A	2.20	11.3	0.72	6.7	1.59	10.7	11.2	11.2	11.2	11.2	1.0	11.2	1.0%	18	Runoff from CVS-4A																
CVS-5 (inlet 5-4)	5	2.19	9.0	0.67	7.3	1.48	10.8	12.1	1.48	10.0	9.8	1.0	11.0	1.0%	18	Runoff from CVS-5																
CVS-6 (inlet 6-4)	6	0.58	5.0	0.67	6.8	0.36	2.5	12.1	0.36	3.5	3.5	0.0	3.5	1.7%	36	Runoff from CVS-6																
CVS-6A (FES 2-4)	6A	0.78	5.0	0.46	6.8	0.36	3.2																									
CVS-7 (inlet 1-6)	7	1.11	10.2	0.84	7.0	0.93	6.5	12.1	0.83	11.4	7.3	4.1	15.4	3.0%	24	Runoff from CVS-7																
CVS-8 (inlet 4-5A)	8	1.59	10.1	0.72	7.0	1.15	8.1	12.1	1.15	8.6	8.1	0.5	8.1	1.4%	24	Runoff from CVS-8																
CVS-9 (inlet 4-5A)	9	2.41	11.9	0.72	6.5	1.74	11.4	12.1	1.74	11.6	10.2	1.4	10.2	1.2%	24	Runoff from CVS-9																
CVS-10 (inlet 5-4A)	10	0.40	5.8	0.76	6.5	0.31	2.6																									
CVS-11 (inlet 1-5)	11	2.03	12.3	0.84	6.5	1.70	11.0	12.1	1.96	12.3	10.7	1.6	10.6	1.2%	24	Runoff from CVS-11																
CVS-12 (inlet 2-5)	12	4.58	11.9	0.72	6.6	2.31	21.7	12.1	3.31	22.6	22.6	0.0	22.6	0.7%	24	Runoff from CVS-12																
CVS-12A (inlet 3-5)	12A	0.81	7.7	0.72	6.8	0.96	6.6																									
CVS-12B (inlet 3-5)	12B	1.31	10.8	0.72	6.8	0.96	6.6																									
CVS-13 (inlet 4-5)	13	1.16	7.4	0.72	6.9	1.04	6.1	12.1	0.84	8.9	8.9	0.5	8.9	1.0%	24	Runoff from CVS-13																
CVS-13A (inlet 5-5A)	13A	1.20	8.7	0.72	6.9	1.04	6.1																									
CVS-13B (inlet 4-5B)	13B	1.53	9.0	0.76	7.3	1.17	8.6																									
CVS-14 (inlet 6-5)	14	1.89	11.1	0.72	6.7	1.37	9.2	12.1	1.37	10.1	10.1	0.0	54.4	3.2%	30	Runoff from CVS-14																
CVS-14A (inlet 7-5)	14A	0.41	5.75	0.46	5.8	0.18	10.2																									
CVS-14B (inlet 6-5A)	14	2.73	13.4	0.49	6.2	1.35	8.4																									
CVS-14C (inlet 5-6B)	14B	1.04	11.4	0.72	6.7	1.40	8.3																									
CVS-15 (inlet 2-6)	15	2.59	12.2	0.62	6.6	1.61	11.1	12.1	1.45	9.1	6.1	0.1	6.1	0.1%	30	Runoff from CVS-15																
CVS-15A (inlet 5-6B)	15A	0.93	7.9	0.74	6.7	1.01	8.4																									
CVS-16 (inlet 3-6)	16	1.60	10.2	0.62	6.8	1.00	10.8																									
CVS-17 (inlet 2-7)	17	1.44	8.4	0.72	7.0	1.04	7.8																									
CVS-17A	17A	1.18	13.8	0.72	6.2	1.58	8.7																									
CVS-17B	17B	2.69	10.0	0.70	7.0	1.68	9.1	12.1	1.08	10.0	10.0	0.0	10.0	0.0%	30	Runoff from CVS-17																
CVS-17C (inlet 2-7)	17	1.99	16.1	0.80	6.4	1.31	11.0	12.1	1.31	-	-	-	-	-	-																	
CVS-18 (inlet 3-7)	18	1.60	10.2	0.72	6.8	1.00	10.8	12.1	1.01	-	-	-	-	-	-																	
CVS-21	21	31.86	1.81	0.57	5.2	2.81	18.6																									
CVS-22 (inlet 2-9A)	22	2.03	12.3	0.63	6.0	1.63	10.3																									
CVS-23 (inlet 2-9)	23	0.87	5.5	0.80	6.6	0.71	6.1																									
CVS-24 (inlet 3-9)	24	1.20	8.7	0.72	6.9	1.04	6.1																									
BE1-1 (inlet 1-1)	BE1	1.28	7.6	0.63	7.8	0.53	7.8	8.9																								
BE1-2 (inlet 1-1)	BE1	1.28	7.6	0.63	7.8	0.53	7.8	8.9																								
BE1-3 (inlet 1-1)	BE1	1.28	7.6	0.63	7.8	0.53	7.8	8.9																								
BE1-4 (inlet 1-2)	BE1	1.75	7.8	0.64	7.7	1.46	11.6																									
BE1-5 (inlet 1-2)	BE1	1.75	7.8	0.64	7.7	1.46	11.6																									
BE1-6	BE1	6.36	3.54	0.80	7.9	3.17	24.9	12.1	3.76	24.9	24.9	0.0	24.9	0.0%	30	Runoff from BE1-6																

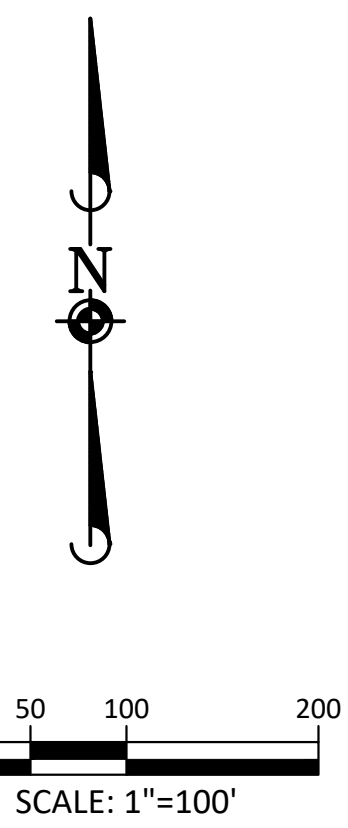

DIRECT RUNOFF											INLET		STORM SEWER		REMARKS
Brand ID	Design Point	Area (ac)	T (min)	Rout. Coefficient, C	Intensity, I (in/h)	Peak Flow, Q (cfs)	Direct Runoff, Q (cfs)	Inlet Flow, Q (cfs)	Inlet Depth (ft)	Intercepted (cfs)	By-pass (cfs)	Design Flow (cfs)	Depth (ft)	Pipe Size (inches)	
CVS-1 (Inlet 1-3)	1	3.85	6.9	0.33	4.3	1.27	5.5	5.5	5.5	0.0	10.0	3.16	24		
CVS-2 (Inlet 2-3)	2	1.42	6.6	0.72	4.3	1.03	4.5	4.5	4.5	0.0	4.5	10.0%	24		
CVS-3 (Inlet 1-4)	3	0.97	6.7	0.58	4.0	0.54	3.4	3.4	3.4	0.0	3.4	1.7%	18		
CVS-4 (Inlet 2-4)	4	1.17	4.1	0.46	5.0	0.53	2.6	2.6	2.6	0.0	2.6	0.9%	18		
CVS-5A (Inlet 3-4)	4A	20.2	11.3	0.51	3.6	11.3	4.0	4.0	4.0	0.0	4.0	1.0%	18		
CVS-6 (Inlet 3-4)	5	0.42	6.7	0.42	3.0	0.93	1.6	1.6	1.6	0.0	3.4	0.2%	18		
CVS-6 (Inlet 4-4)	6	0.58	5.0	0.42	4.7	0.24	1.1	1.1	1.1	0.0	9.6	1.7%	18		
CVS-6A (FES 2-4)	6A	0.78	5.0	0.02	4.7	0.01	0.1	0.1	0.1	0.0	8.5	1.3%	18		
CVS-7 (Inlet 4-4)	7	1.11	10.2	0.73	3.7	0.81	3.0	3.0	3.0	0.0	6.0	3.0%	24		
CVS-8 (Inlet 4-4)	8	0.91	10.1	0.51	3.7	0.81	2.0	2.0	2.0	0.0	3.0	2.0%	24		
CVS-9A (Inlet 4-6A)	9	2.41	11.9	0.51	3.5	12.9	4.3	4.3	4.3	0.0	4.3	1.2%	18		
CVS-10A (Inlet 4-6)	10	0.37	5.0	0.51	4.7	0.19	0.9	0.9	0.9	0.0	0.9	1.0%	18		
CVS-11 (Inlet 5-5A)	11	0.37	6.7	0.47	3.3	1.02	1.4	1.4	1.4	0.0	2.8	3.0%	18		
CVS-10A (Inlet 5-5A)	10A	0.40	10.6	0.58	0.59	4.5	0.23	1.1	1.1	1.1	0.0	1.1	1.0%	18	
CVS-11 (Inlet 5-5)	11	2.03	12.3	0.73	3.4	1.47	5.1	5.1	5.1	0.0	13.3	0.8%	36		
CVS-12 (Inlet 5-5)	12	0.51	10.1	0.51	3.5	2.34	2.2	2.2	2.2	0.0	2.2	3.0%	18		
CVS-12A (Inlet 5-5)	12	0.81	7.7	0.51	4.1	0.47	2.4	2.4	2.4	0.0	41.4	1.9%	42		
CVS-12B (Inlet 5-5)	12A	13.1	10.8	0.51	3.6	0.67	2.4	2.4	2.4	0.0	41.4	1.9%	42		
CVS-13 (Inlet 5-5)	13	0.51	10.1	0.51	4.2	0.59	2.5	2.5	2.5	0.0	4.8	3.0%	18		
CVS-13A (Inlet 5-5A)	13A	10.2	8.7	0.58	4.0	0.69	2.7	2.7	2.7	0.0	2.7	1.0%	18		
CVS-13B (Inlet 4-5B)	13B	1.53	9.0	0.59	0.39	0.90	3.5	3.5	3.5	0.0	3.5	1.0%	18		
CVS-13C (Inlet 4-5C)	13C	1.26	8.3	0.51	0.39	0.90	3.5	3.5	3.5	0.0	2.5	1.0%	18		
CVS-14 (Inlet 5-5)	14	1.98	11.1	0.51	3.5	0.97	3.5	3.5	3.5	0.0	4.5	0.8%	36		
CVS-14A (Inlet 5-7)	14A	4.01	17.5	0.02	2.9	0.07	0.2	0.2	0.2	0.0	4.3	4.7%	24		
CVS-14B (Inlet 5-7)	14B	2.73	13.4	0.07	3.3	0.20	0.7	0.7	0.7	0.0	8.8	3.4%	36		
CVS-14C (Inlet 5-7B)	14C	1.91	11.1	0.51	3.5	0.99	3.5	3.5	3.5	0.0	2.8	2.8%	18		
CVS-15 (Inlet 5-5)	15	2.01	13.4	0.51	3.3	1.03	3.4	3.4	3.4	0.0	3.4	5.0%	18		
CVS-15A (Inlet 5-6A)	15A	0.95	10.9	0.85	4.1	0.52	2.1	2.1	2.1	0.0	2.1	1.0%	18		
CVS-16 (Inlet 2-11)	16	0.51	10.1	0.51	3.6	0.70	2.5	2.5	2.5	0.0	2.5	1.0%	18		
CVS-17 (Inlet 2-11)	17	1.44	8.4	0.51	4.0	0.74	3.0	3.0	3.0	6.8	0.0	3.0	5.2%	18	
CVS-18	18	2.69	10.0	0.47	3.8	1.25	4.7	4.7	-	-	-	-	-		
CVS-19	19	0.98	10.1	0.51	0.86	4.1	0.9	0.9	-	-	-	-	-		
CVS-20	20	1.80	10.4	0.51	3.7	0.92	3.4	3.4	-	-	-	-	-		
CVS-21	21	3.88	16.1	0.51	3.1	1.89	6.1	6.1	-	-	-	-	-		
CVS-22 (Inlet 10A)	22	0.51	10.1	0.51	4.4	0.45	2.0	2.0	2.0	0.0	2.0	1.0%	18		
CVS-23 (Inlet 2-10A)	23	0.87	5.5	0.70	4.0	0.61	2.8	2.8	7.1	0.0	2.8	1.0%	18		
BEL-1 (Inlet 2-1)	B1	3.73	12.8	0.72	4.1	1.48	4.0	4.0	4.0	0.0	6.1	3.3%	36		
BEL-2 (Inlet 2-1)	B2	3.38	7.8	0.72	4.2	0.99	4.1	4.1	4.1	0.0	8.8	0.9%	36		
BEL-3 (Inlet 2-1)	B3	0.76	10.0	0.20	3.7	1.30	4.2	4.2	4.2	0.0	4.2	1.0%	18		
BEL-4 (Inlet 1-2)	B4	1.75	7.9	0.73	4.3	1.27	5.2	5.2	5.2	0.0	12.1	2.9%	36		
BEL-5	B5	4.55	11.0	0.71	3.6	3.22	11.8	11.8	-	-	-	-	-		
BEL-6	B6	0.51	10.1	0.51	3.6	0.70	2.5	2.5	-	-	-	-	-		

Item ID	Component	DIRECT PURCH					TOTAL PURCH			INLET		STOCK BENCH		REMARKS			
		Qty (m³)	Unit Price (€)	Total Price (€)	Qty (m³)	Unit Price (€)	Total Price (€)	Qty (m³)	Unit Price (€)	Total Price (€)	Qty (m³)	Unit Price (€)	Total Price (€)				
CVS-1 (HMT 1-3)	1	3.865	6.8	6.85	8.0	25.51	20.2	12.1	25.1	20.2	13.5	6.7	22.5	31.4	Exposes flow goes to CVS-3		
CVS-2 (HMT 2-3)	1	1.62	6.8	0.85	8.1	1.21	8.9	1.21	9.1	8.0	1.0	9.0	10.0	24	Exposes flow goes to CVS-3		
CVS-3 (HMT 4-5)	1	0.84	6.2	0.76	8.3	0.71	5.9	1.21	6.7	7.7	4.8	7.7	17.6	18	Exposes flow goes from CVS-1 - Exposes goes		
CVS-4 (HMT 2-4)	1	1.137	4.1	0.69	8.3	0.81	7.8	1.21	6.8	8.0	0.5	8.0	0.5	8.0	2.96	18	Exposes flow goes from CVS-1 - Exposes goes
CVS-5 (HMT 3-4)	1	0.46	0.9	0.67	8.3	0.71	5.9	1.21	6.8	10.2	11.2	1.0	11.2	12.2	1.0	24	Exposes flow goes from CVS-1 - Exposes goes
CVS-6 (HMT 4-5)	1	5.218	9.0	0.67	7.3	1.48	10.8	1.21	14.8	10.8	9.8	1.0	11.0	11.0	1.0	24	Exposes flow goes to CVS-4A
CVS-6 (HMT 6-4)	6	0.58	0.5	0.67	8.3	0.39	3.5	1.21	0.39	3.5	1.0	0.3	1.73	3.6	1.0	24	Exposes flow goes to CVS-4A
CVS-6A (FES 2-4)	1	0.58	0.5	0.46	8.3	0.36	3.2	1.21	0.36	3.2	1.0	0.5	0.10	3.16	1.0	24	Exposes flow goes to CVS-4A
CVS-7 (HMT 1-4)	7	1.11	10.2	0.84	7.0	0.83	5.8	1.21	0.30	11.4	7.3	4.1	15.4	30.0	24	Exposes flow goes from CVS-3 - Exposes goes	
CVS-8 (HMT 2-6)	8	1.59	10.1	0.72	7.0	1.15	8.1	1.21	11.5	8.6	0.5	8.1	0.5	1.45	24	Exposes flow goes from CVS-4 - Exposes goes	
CVS-9 (HMT 4-5)	9	1.91	10.1	0.72	7.0	1.65	10.2	1.21	17.4	10.2	1.0	10.2	1.0	1.0	24	Exposes flow goes to CVS-4 - Exposes goes	
CVS-10 (HMT 4-4)	30	0.37	5.0	0.72	8.3	0.07	2.4	1.21	2.4	2.4	2.4	0.0	2.4	2.4	24	Exposes flow goes to CVS-4 - Exposes goes	
CVS-10 (HMT 5-4A)	10	0.28	13.7	0.70	6.2	1.96	12.1	1.21	1.96	12.1	10.6	1.0	12.1	10.6	1.0	24	Exposes flow goes from CVS-4 - Exposes goes
CVS-10A (HMT 5-4A)	10A	0.40	5.8	0.76	8.3	0.31	2.6	1.21	2.6	2.6	2.2	0.4	2.2	1.0	24	Exposes flow goes to CVS-10	
CVS-11 (HMT 1-5)	11	2.203	12.3	0.84	6.5	1.70	11.0	1.21	13.1	10.6	1.0	10.6	1.0	36.7	0.88	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-12 (HMT 2-5)	12	1.620	11.9	0.72	6.3	3.31	21.7	1.21	3.31	25.6	0.5	2.9	0.76	3.6	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-13 (HMT 3-5)	13	1.204	10.8	0.72	6.3	1.45	10.5	1.21	10.5	10.5	0.5	2.9	0.76	3.6	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-13A (HMT 3-5)	13A	1.038	0.7	0.85	8.0	0.65	6.5	1.21	6.5	8.4	0.4	10.0	13.7	1.9	4.2	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-14 (HMT 4-5)	14	1.313	10.8	0.72	6.3	1.45	10.5	1.21	10.5	10.5	0.5	2.9	0.76	3.6	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-15 (HMT 6-5A)	15A	1.20	1.02	0.78	7.4	0.91	6.7	1.21	6.7	6.7	6.2	0.5	6.2	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-16 (HMT 4-5B)	16	1.30	0.9	0.76	7.3	1.17	8.5	1.21	8.5	9.4	0.9	2.5	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72	
CVS-16C (HMT 4-5B)	16C	1.30	0.9	0.76	7.3	1.17	8.5	1.21	8.5	9.4	0.9	2.5	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72	
CVS-17 (HMT 1-6)	17	1.889	10.1	0.72	7.0	1.65	10.2	1.21	17.4	10.2	1.0	10.2	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72	
CVS-17A	17A	1.18	1.38	0.72	6.3	0.99	7.0	1.21	7.0	7.9	0.4	6.4	6.2	1.9	4.2	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-18 (HMT 2-6)	18	1.59	10.1	0.72	7.0	1.65	10.2	1.21	17.4	10.2	1.0	10.2	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72	
CVS-19	19	2.181	6.0	0.81	8.4	3.31	11.0	1.21	13.1	10.6	1.0	10.6	1.0	36.7	0.88	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-20	20	1.620	11.9	0.72	6.3	3.31	21.7	1.21	3.31	25.6	0.5	2.9	0.76	3.6	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72
CVS-21	21	1.889	10.1	0.72	7.0	1.65	10.2	1.21	17.4	10.2	1.0	10.2	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72	
CVS-22 (HMT 2-10A)	22	0.87	6.2	0.72	8.3	0.63	5.2	1.21	5.2	6.2	0.5	6.2	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72	
CVS-23 (HMT 2-10B)	23	0.87	6.2	0.72	8.3	0.63	5.2	1.21	5.2	6.2	0.5	6.2	1.0	1.0	24	Exposes flow goes from CVS-7 - 13.31 - 4.61 - 2.72	
BEU-1 (HMT 1-3)	1	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-2 (HMT 1-3)	2	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-3 (HMT 1-3)	3	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-4 (HMT 1-3)	4	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-5 (HMT 1-3)	5	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-6 (HMT 1-3)	6	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-7 (HMT 1-3)	7	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-8 (HMT 1-3)	8	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-9 (HMT 1-3)	9	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-10 (HMT 1-3)	10	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-11 (HMT 1-3)	11	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-12 (HMT 1-3)	12	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-13 (HMT 1-3)	13	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-14 (HMT 1-3)	14	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-15 (HMT 1-3)	15	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-16 (HMT 1-3)	16	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-17 (HMT 1-3)	17	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-18 (HMT 1-3)	18	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-19 (HMT 1-3)	19	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-20 (HMT 1-3)	20	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-21 (HMT 1-3)	21	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-22 (HMT 1-3)	22	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-23 (HMT 1-3)	23	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-24 (HMT 1-3)	24	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-25 (HMT 1-3)	25	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-26 (HMT 1-3)	26	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-27 (HMT 1-3)	27	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-28 (HMT 1-3)	28	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-29 (HMT 1-3)	29	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-30 (HMT 1-3)	30	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-31 (HMT 1-3)	31	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-32 (HMT 1-3)	32	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-33 (HMT 1-3)	33	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-34 (HMT 1-3)	34	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-35 (HMT 1-3)	35	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-36 (HMT 1-3)	36	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-37 (HMT 1-3)	37	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-38 (HMT 1-3)	38	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-39 (HMT 1-3)	39	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-40 (HMT 1-3)	40	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-41 (HMT 1-3)	41	0.73	12.6	0.62	8.3	0.31	14.7	1.21	14.7	6.3	6.4	6.9	3.6	10.0	1.0	24	Exposes flow goes to BEU-1
BEU-42 (HMT 1-3)	42	0.73	12.6	0.62	8.3	0.31	14.7	1.21	1								

LEGEND

The legend defines the symbols used on the map:

- SUB-BASIN #**: Represented by a circle containing the text "XX".
- 2/5-YEAR RUNOFF COEFFICIENT (*DENOTES 5-YEAR RUNOFF)**: Represented by the text "X/XX".
- 100-YEAR RUNOFF COEFFICIENT**: Represented by the text "X/XX".
- AREA (ACRES)**: Represented by the text "X.XX AC".
- PROPOSED SUB-BASIN BOUNDARY**: Represented by a thick black line.